



Silicon PNP transistor in a TO-252 Plastic Package.

High breakdown voltage, adoption of MBIT process excellent h_{FE} linearity

High voltage driver applications.





PIN1 Base PIN 2,4 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	D	E
h_{FE} Range	60~120	100~200

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-400	V
Collector to Emitter Voltage	V_{CEO}	-400	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-200	mA
Collector Current – Continuous(Pulse)	I_{CP}	-400	mA
Collector Power Dissipation	P_C	1.0	W
Collector Power Dissipation	$P_C(T_c=25^{\circ}C)$	10	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55~150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=-10\mu A$ $I_E=0$	-400			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=-1.0mA$ $R_{BE}=\infty$	-400			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=-10\mu A$ $I_C=0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-300V$ $I_E=0$			-0.1	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-4.0V$ $I_C=0$			-0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=-10V$ $I_C=-50mA$	60		200	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-50mA$ $I_B=-5.0mA$			-0.8	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-50mA$ $I_B=-5.0mA$			-1.0	V
Transition Frequency	f_T	$V_{CE}=-30V$ $I_C=-10mA$		70		MHz
Collector output capacitance	C_{ob}	$V_{CB}=-30V$ $f=1.0MHz$		5.0		pF
Reverse Transfer Capacitance	C_{re}	$V_{CB}=-30V$ $f=1.0MHz$		4.0		pF
Turn-On Time	t_{on}	$10I_{B1}=-10I_{B2}=I_C=50mA$ $R_L=3K\Omega$ $R_B=200\Omega$ at $I_C=50mA$		0.25		μs
Turn-Off Time	t_{off}			5.0		μs

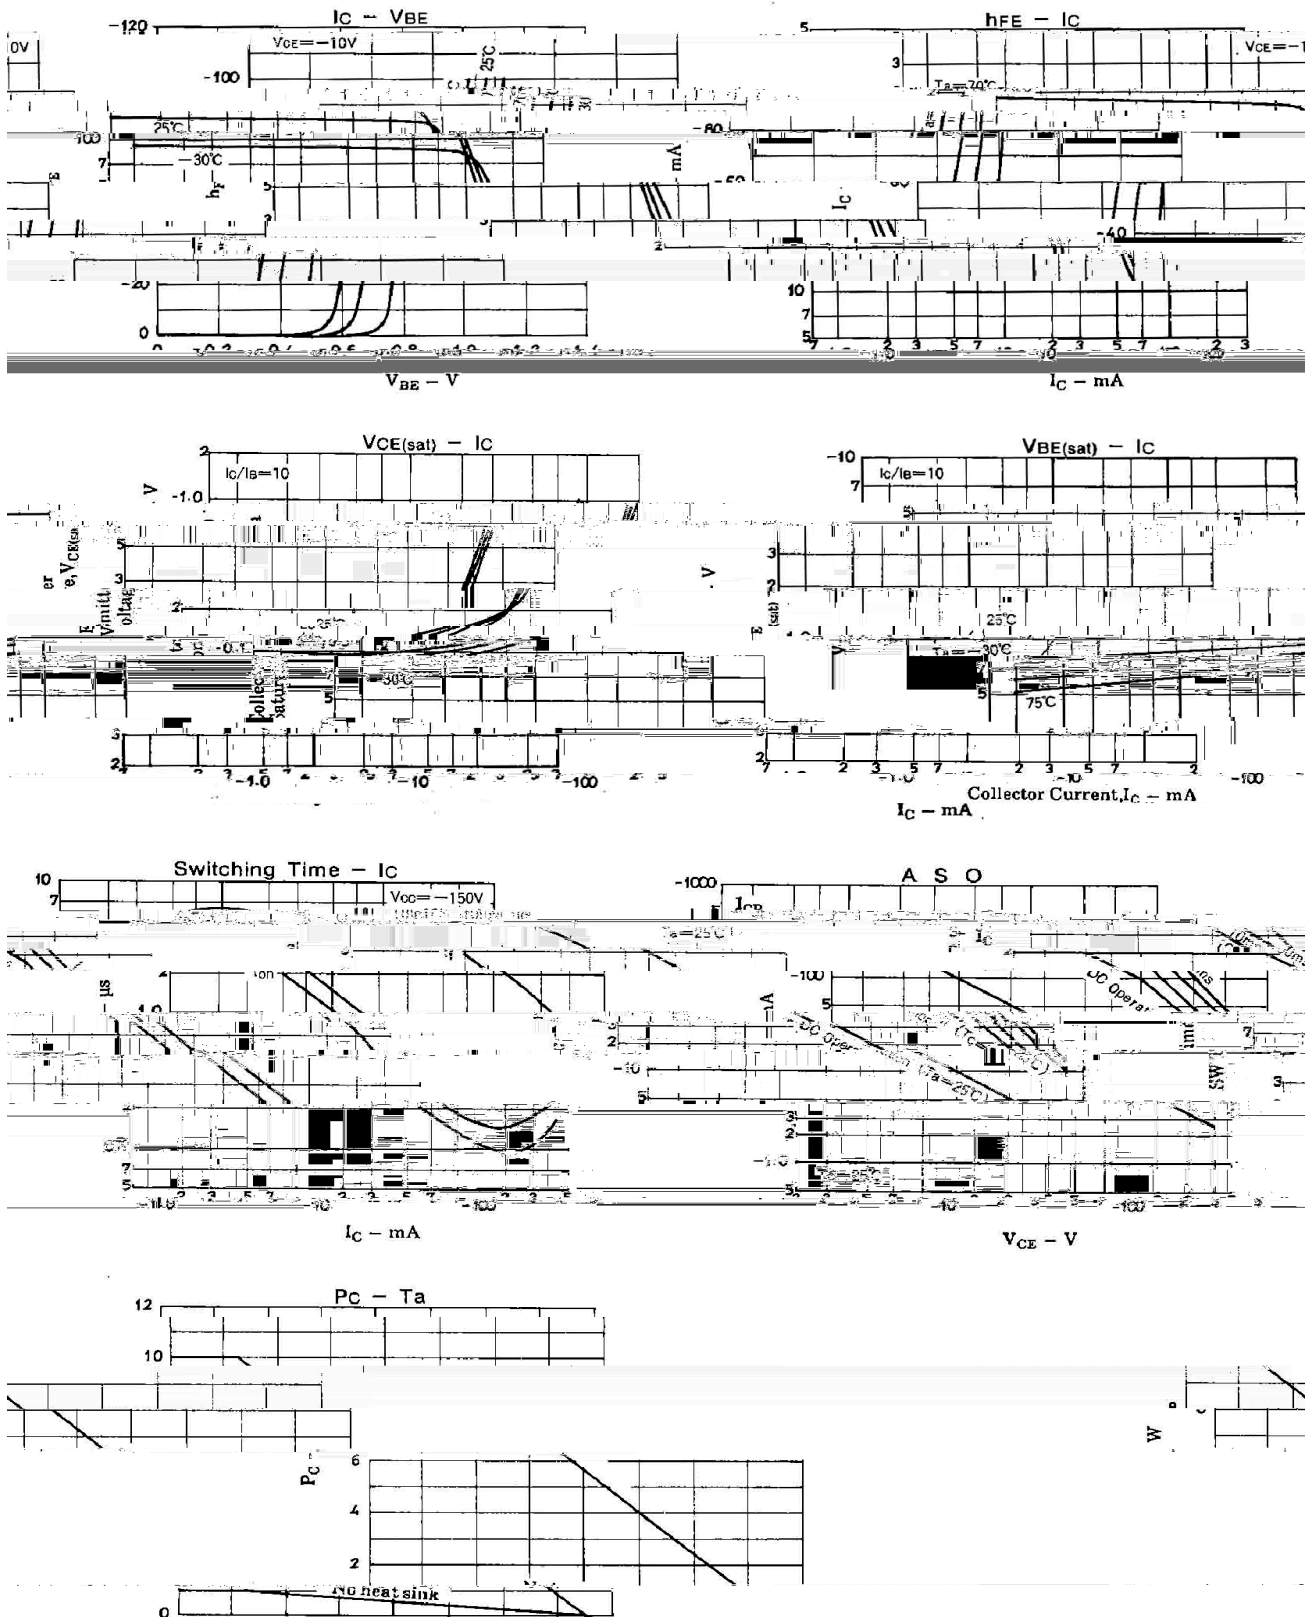

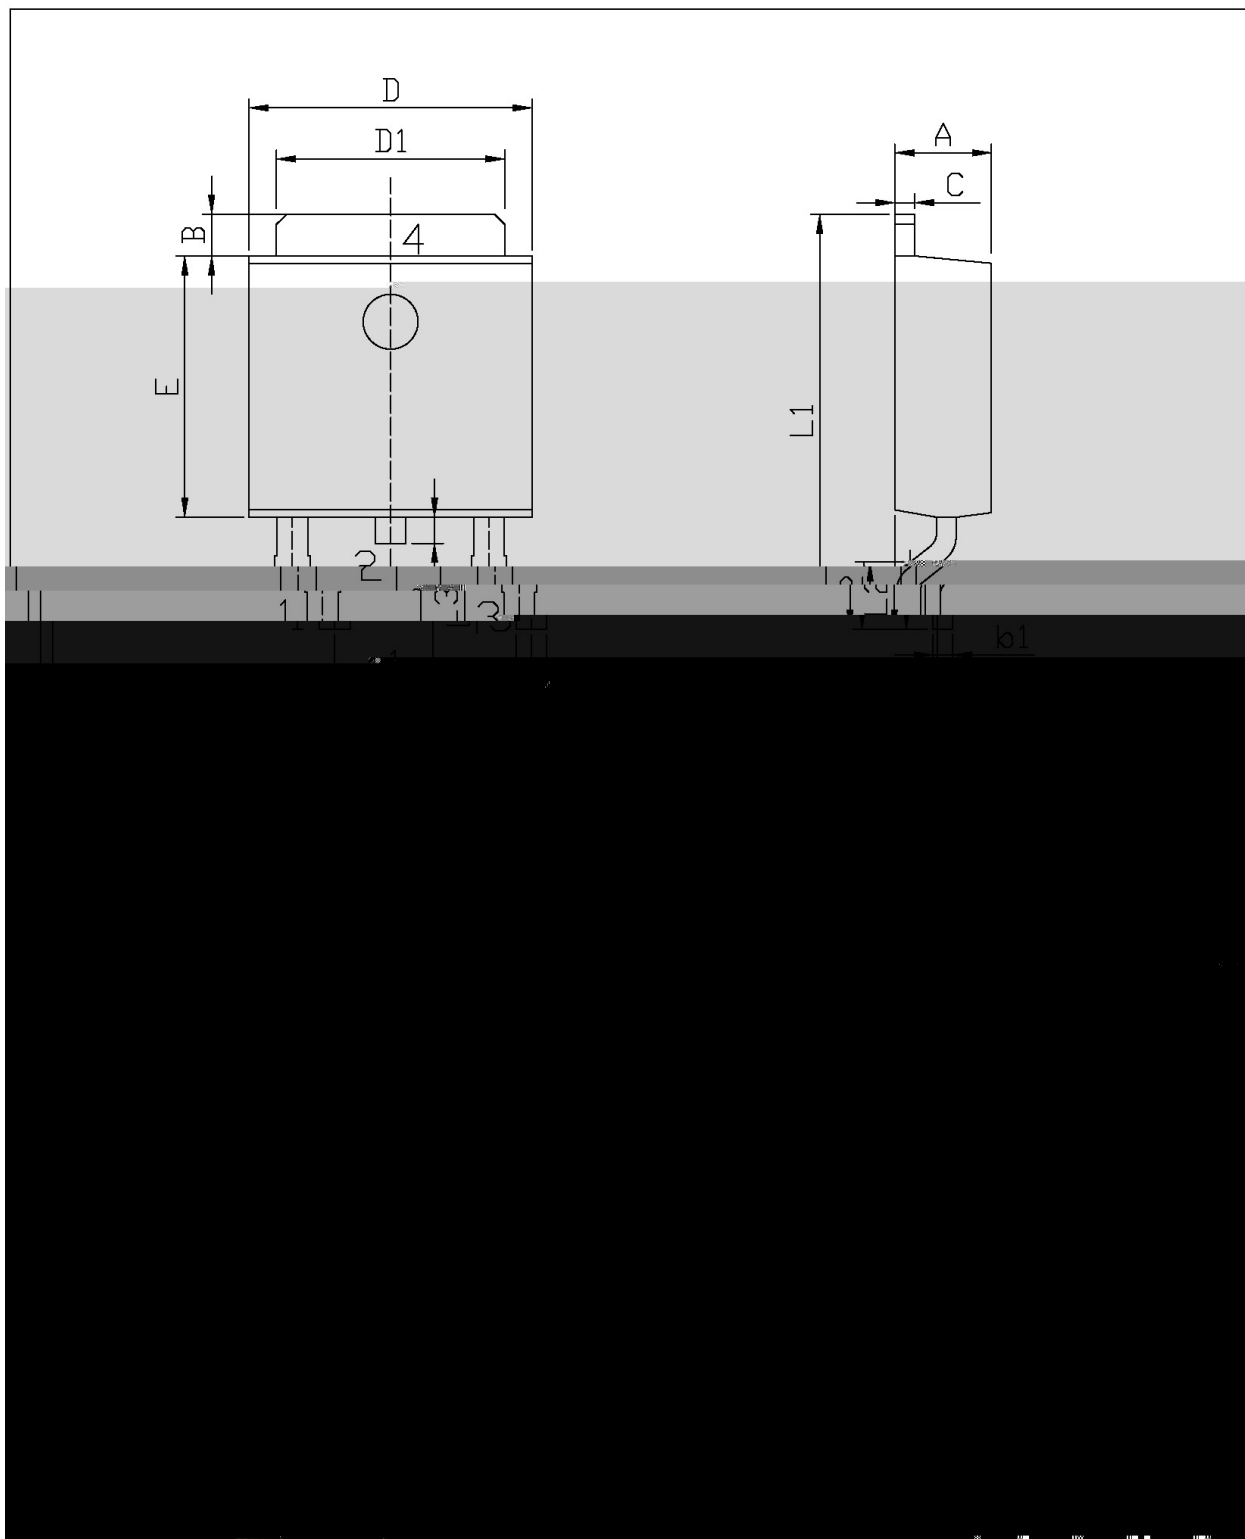

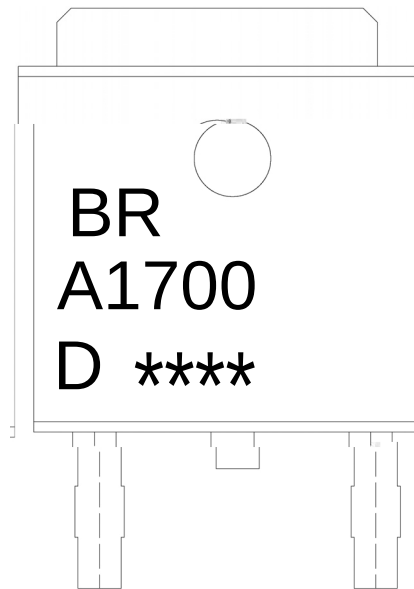

BR

A1700

D

h_{FE}

Note:


BR: Company Code

A1700: Product Type Code.

D: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

Temperature Profile for IR Reflow Soldering(Pb-Free)

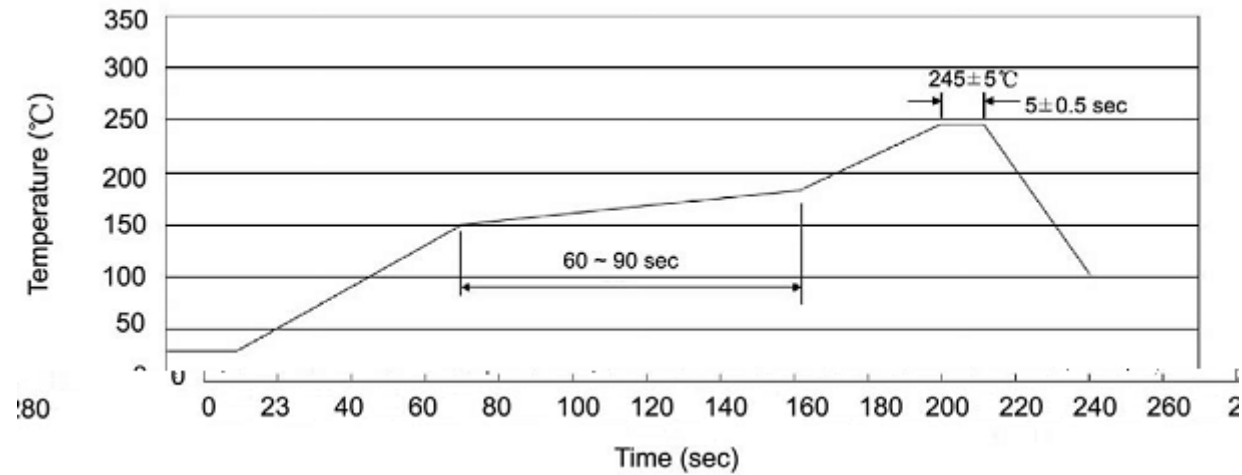

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260 ±5 10 ±1 sec. Temp.:260±5 Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	5	25,000	13" ×16	360×360×50	385×257×392

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180