


TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.

2SD786

Ultra-low noise, low base resistance, low noise voltage, complementary pair with 2SD786.

Ultra-low noise low-frequency amplification, low base resistance for use in MC Head amplifiers.




PIN1 Base PIN 2 Collector PIN 3 Emitter


h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	120~270	180~390	270~560

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-40	V
Emitter to Base Voltage	V_{EBOE}		

T0-92

Unit: mm

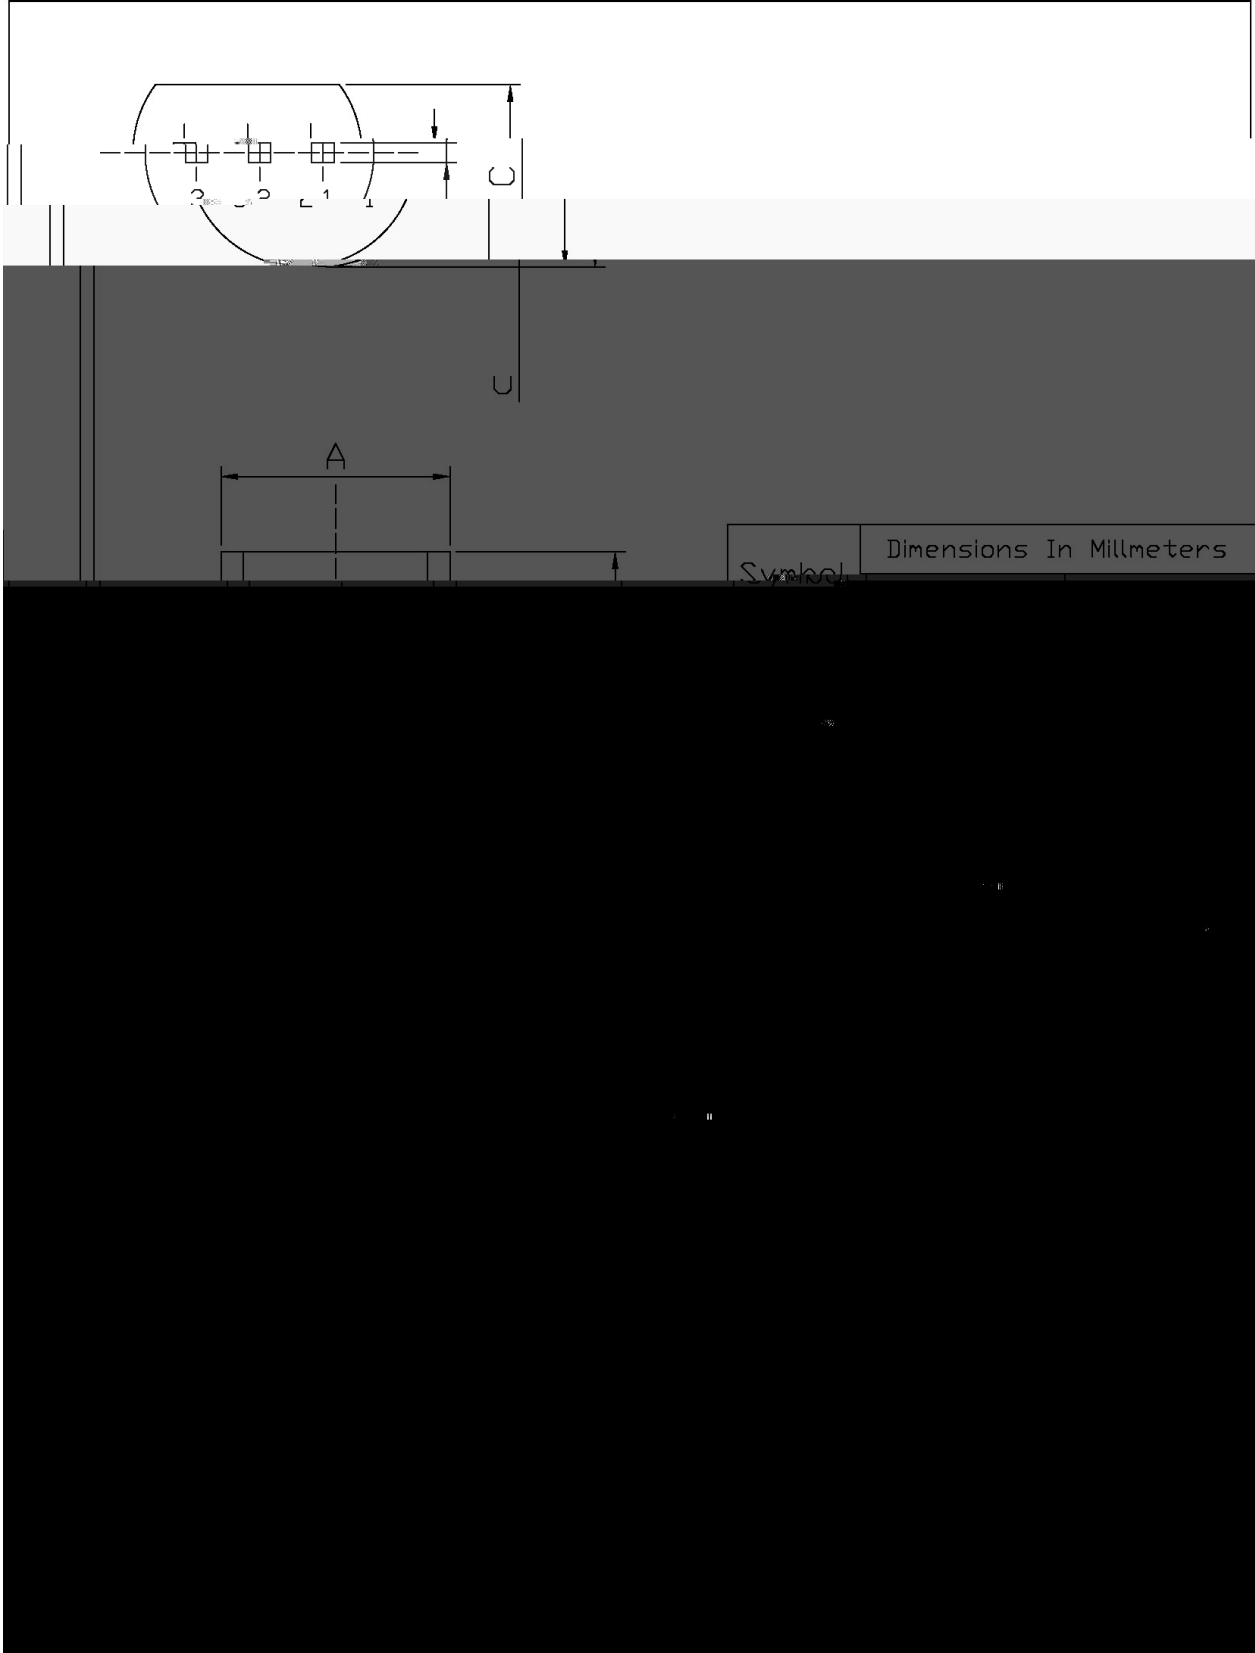

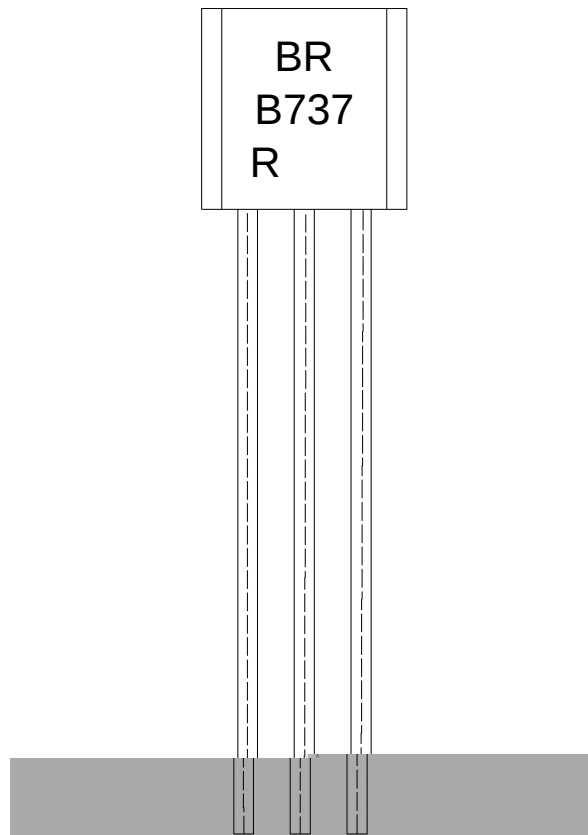

BR:

B737

R: h_{FE}

Note:

BR: Company Code.

B737: Product Type.

R: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.



Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

270±5 10±1 sec. Temp:270±5 Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	只纸带	纸带盒	纸带层盒	盒箱	只箱	盒	箱
							小箱 ,
							大箱