

/ Descriptions

TO-92LM NPN


/ Features

-

/ Applications

2SA1124

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	~	~


/ Absolute Maximum Ratings(Ta=25)

			℃
		~	℃

/ Electrical Characteristics(Ta=25)

		μ				
						μ
		Ω				


/ Electrical Characteristic Curve

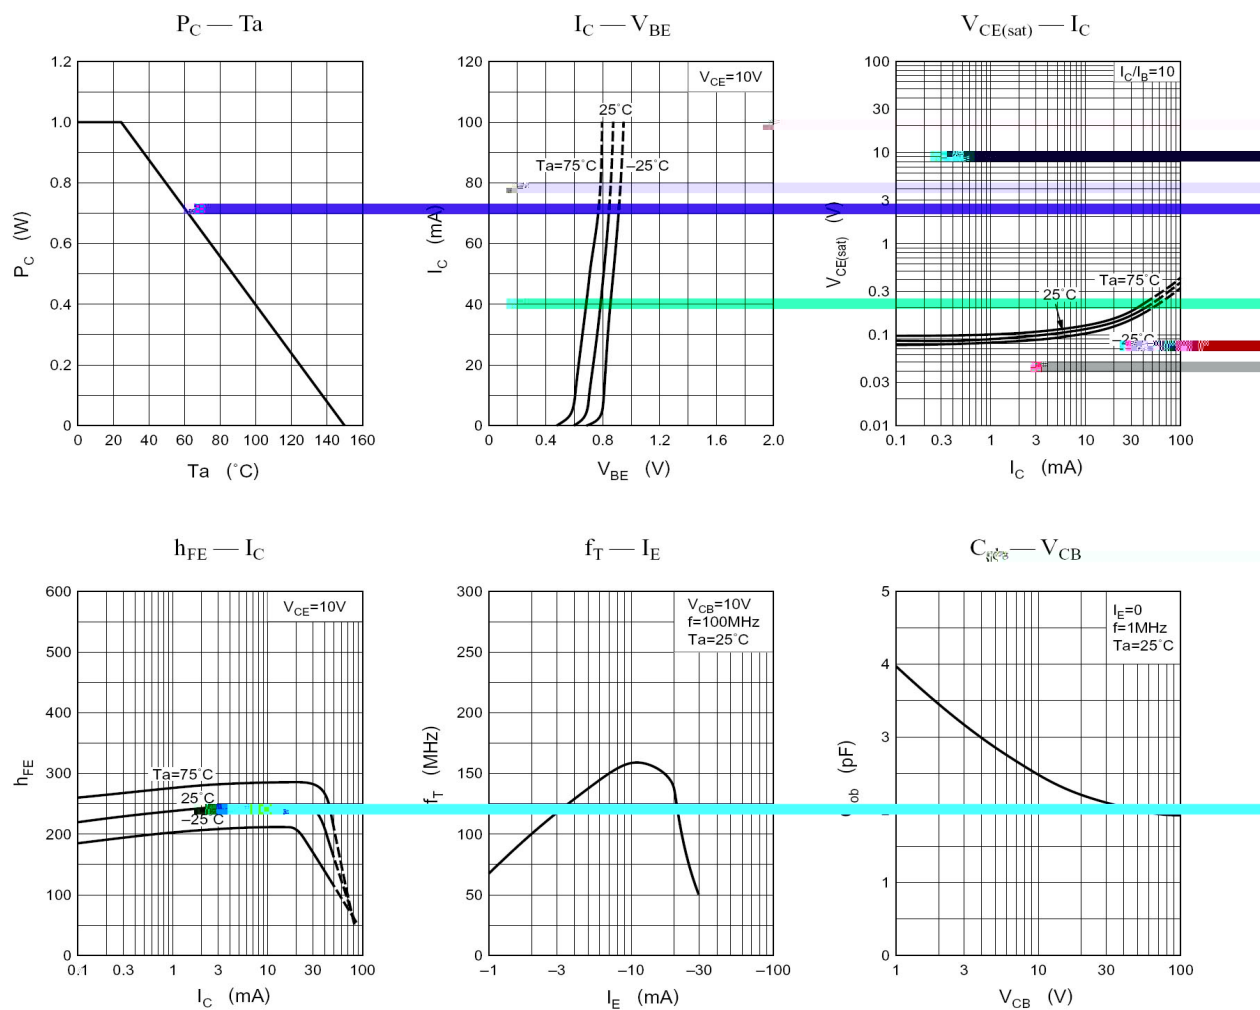


/ Package Dimensions

T0-92LM

Unit: mm

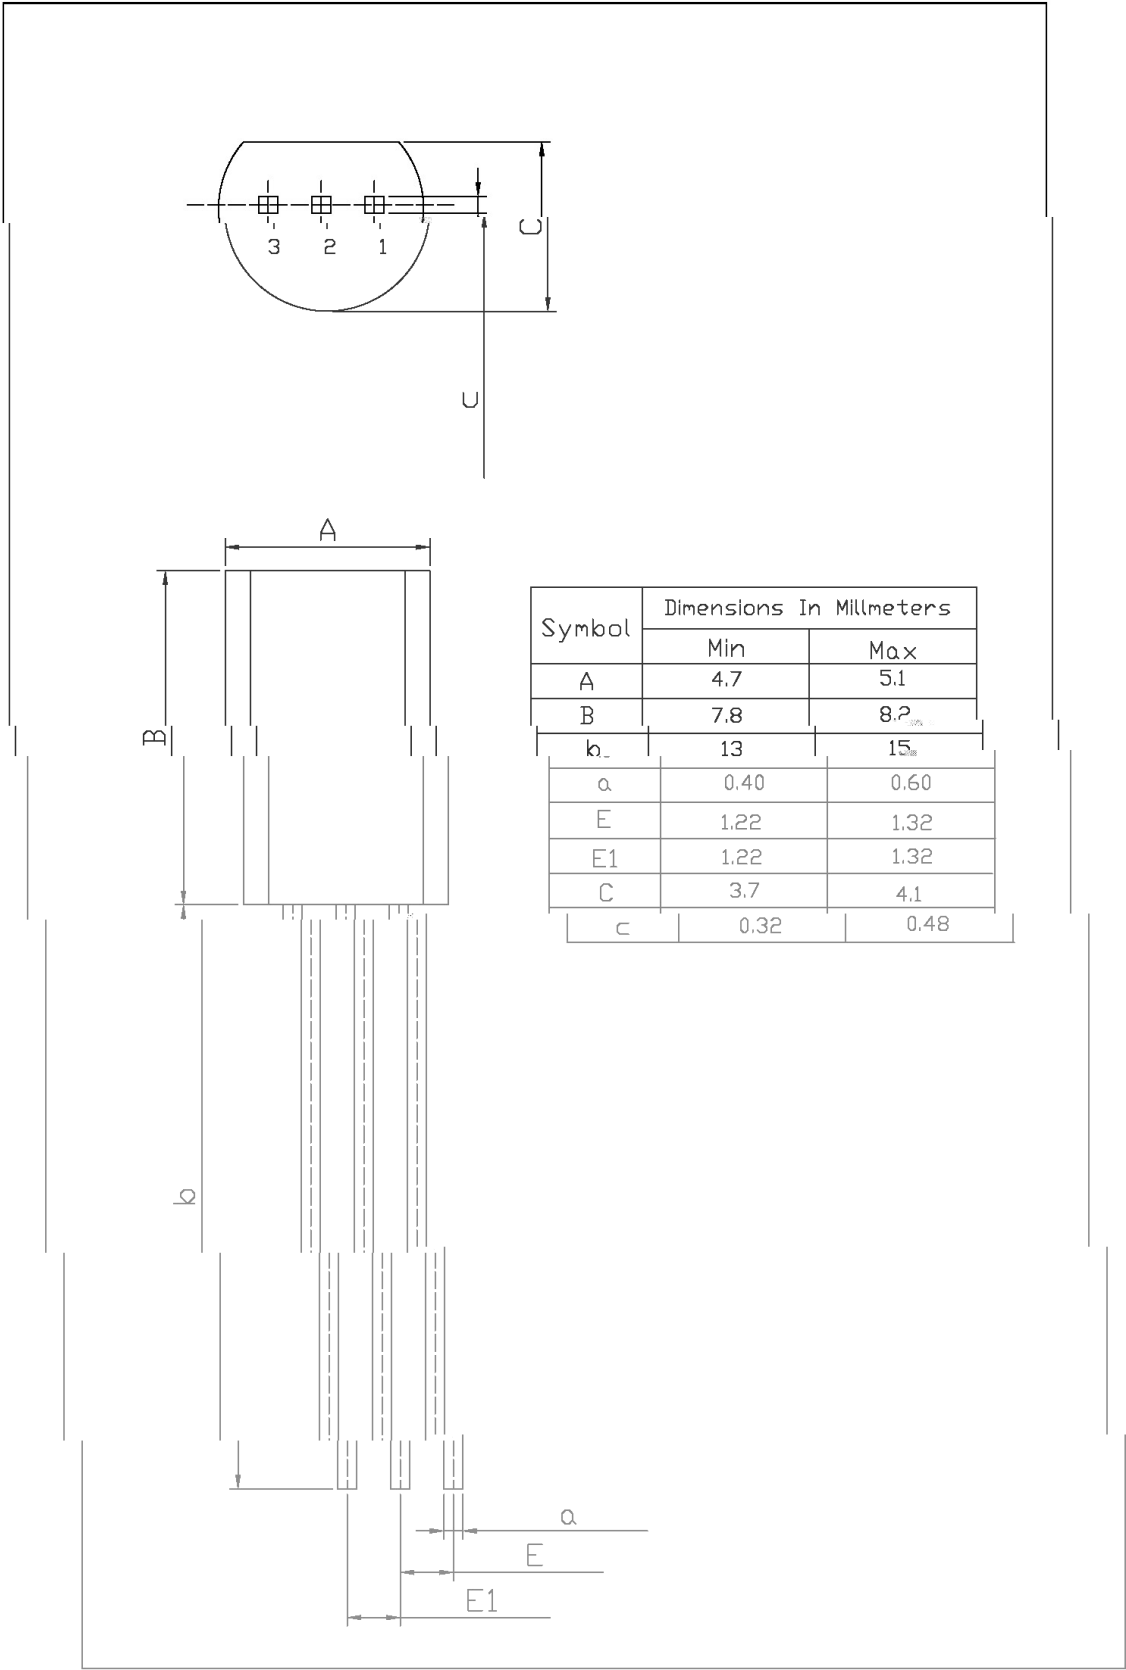


/ Marking Instructions

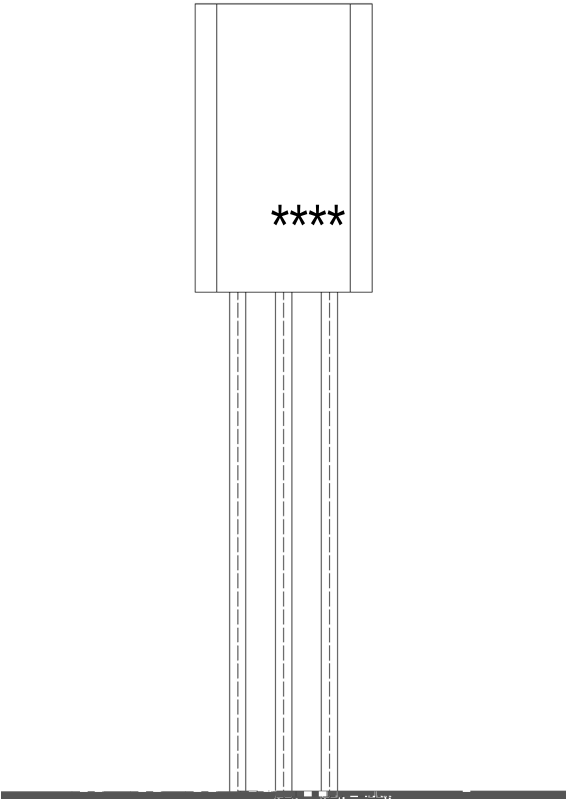

BR:
C2632
R: h_{FE}

() / Temperature Profile for Dip Soldering(Pb-Free)

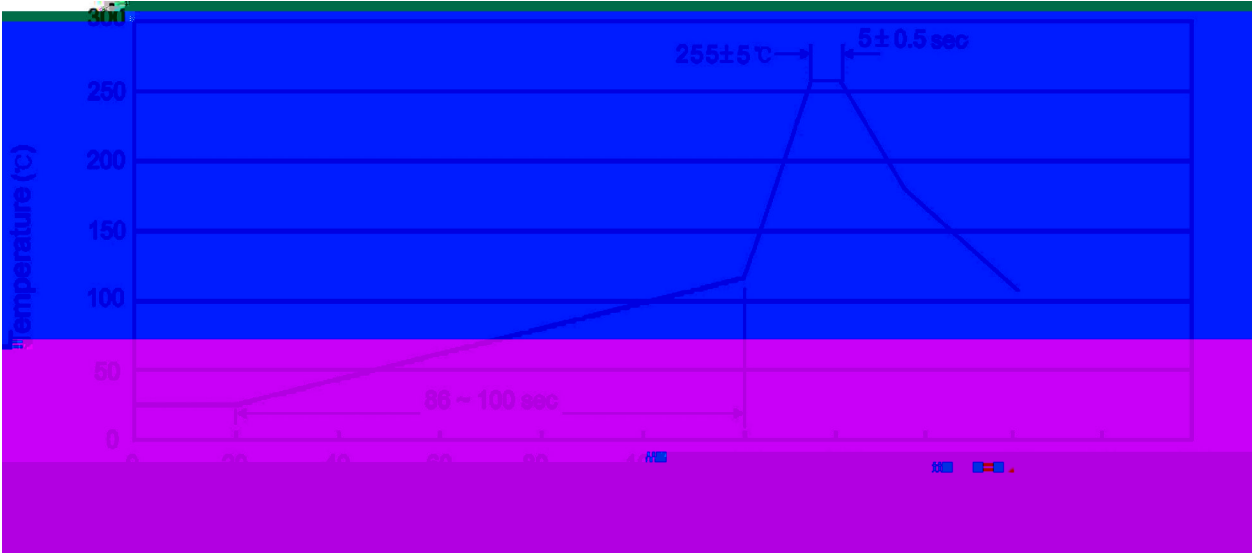

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195

	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92LM	2,500	1	100	10	25,000	328×230×42	480×346×235 547×407×268

/ Notices