

2SC945M

/ Descriptions


VRW056 QSQ

/ Features


/

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


	~	~	~	~

/ Absolute Maximum Ratings(Ta=25)

		~	

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

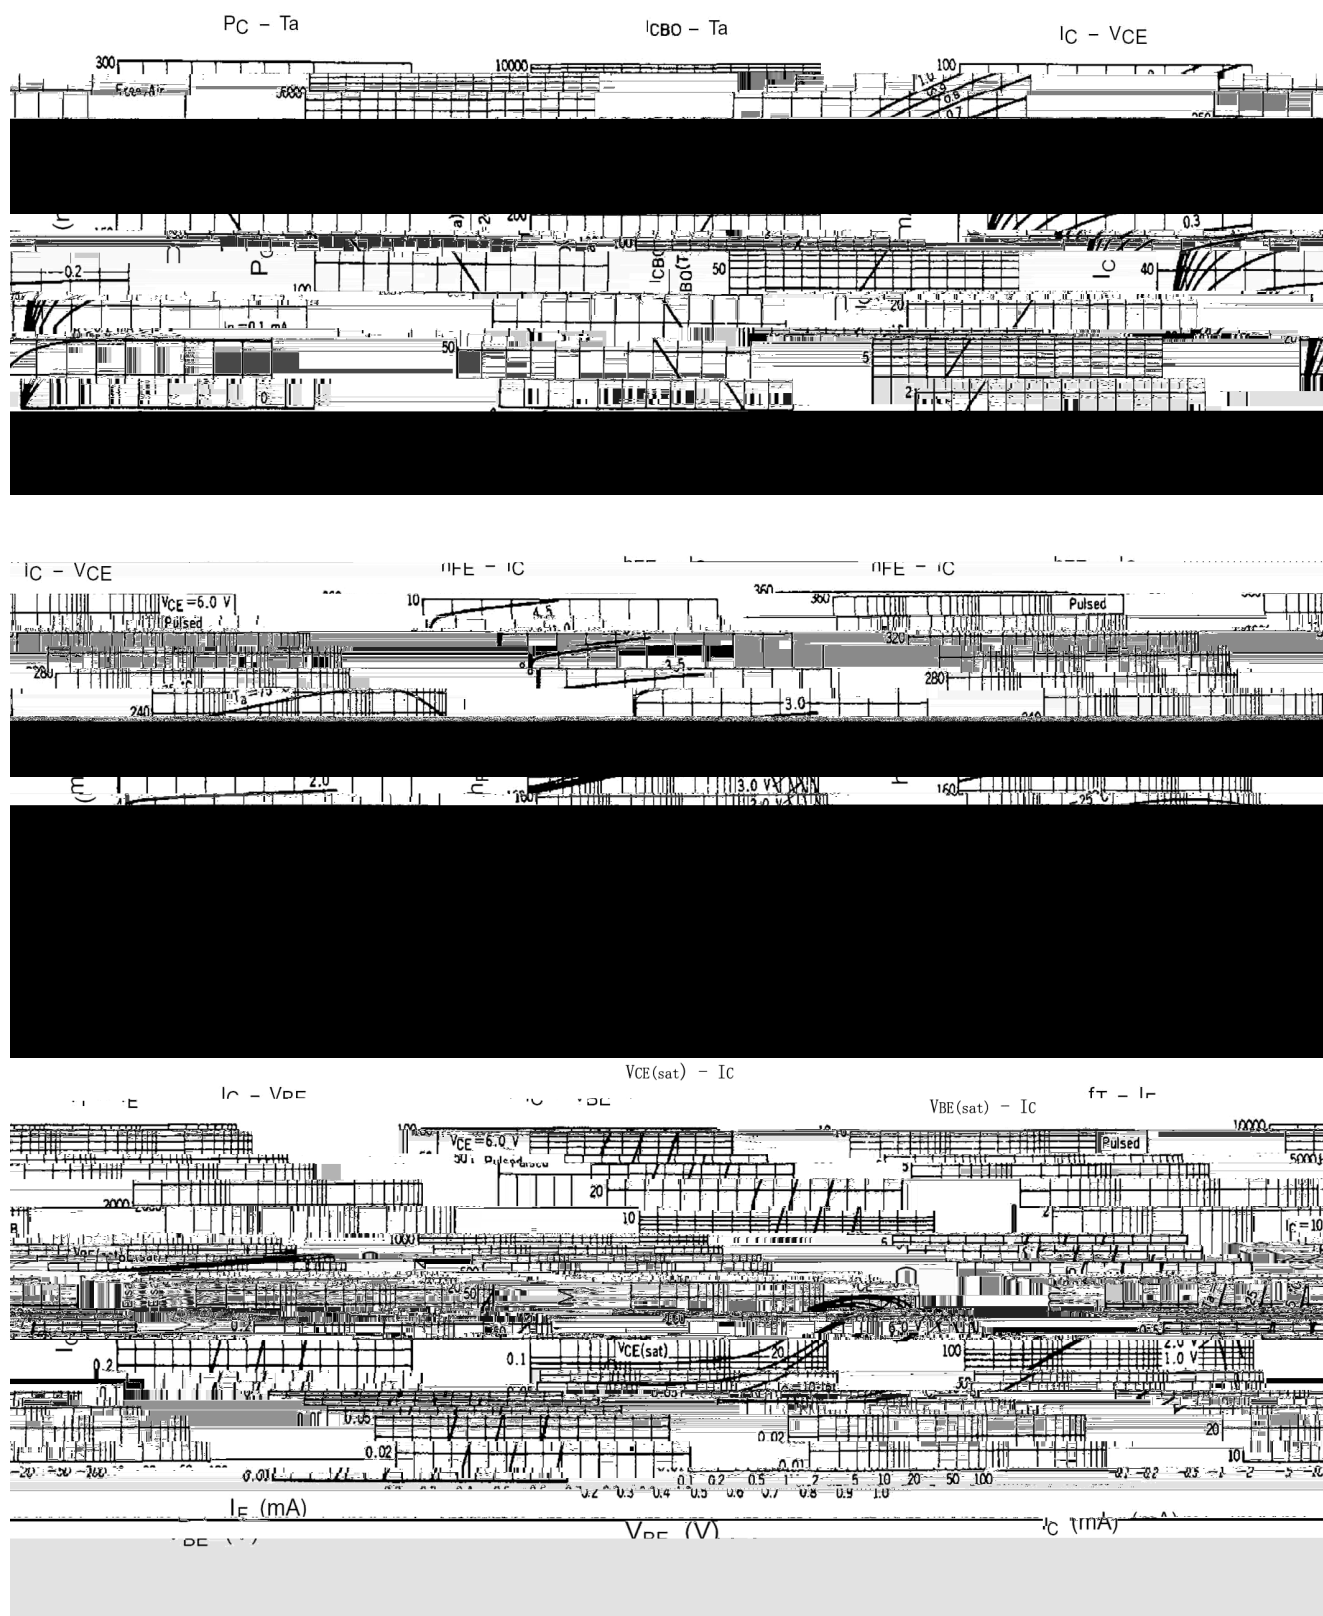


/ Package Dimensions

SOT-23

单位：mm

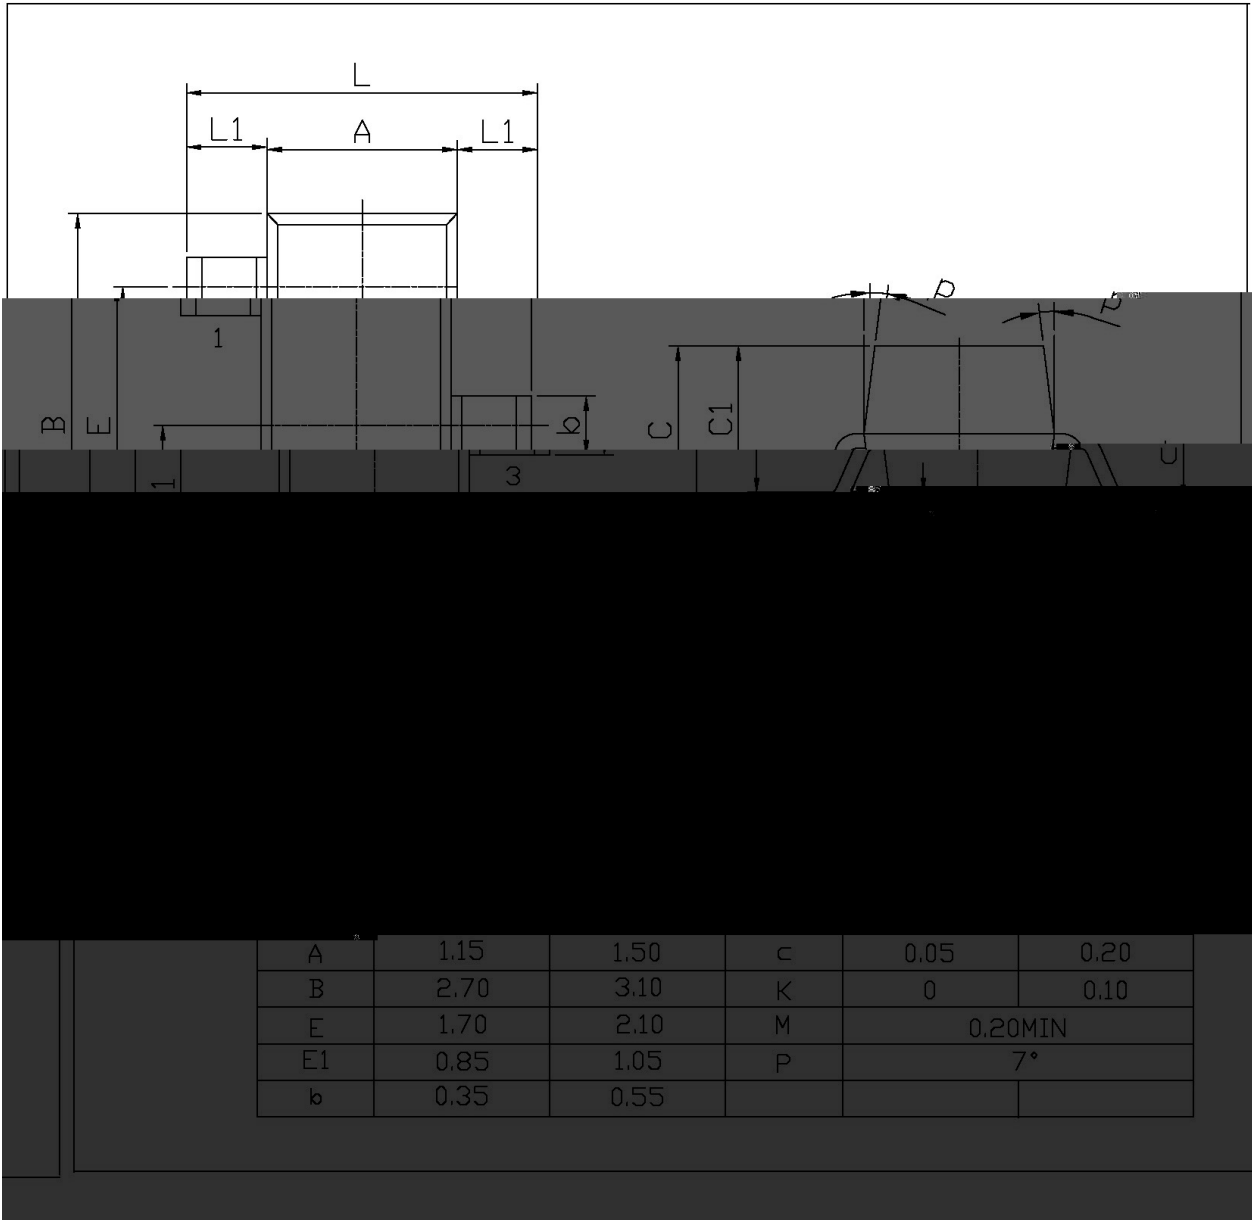


/ Marking Instructions

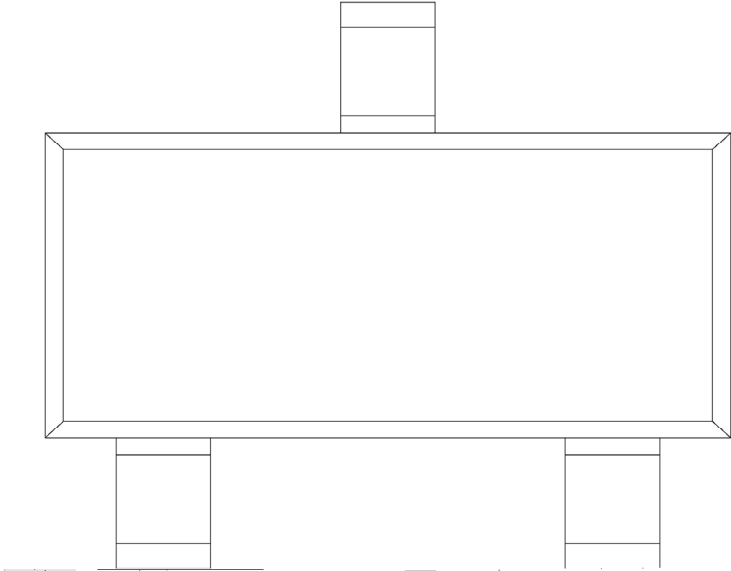

H
CU
U h_{IH}

() /

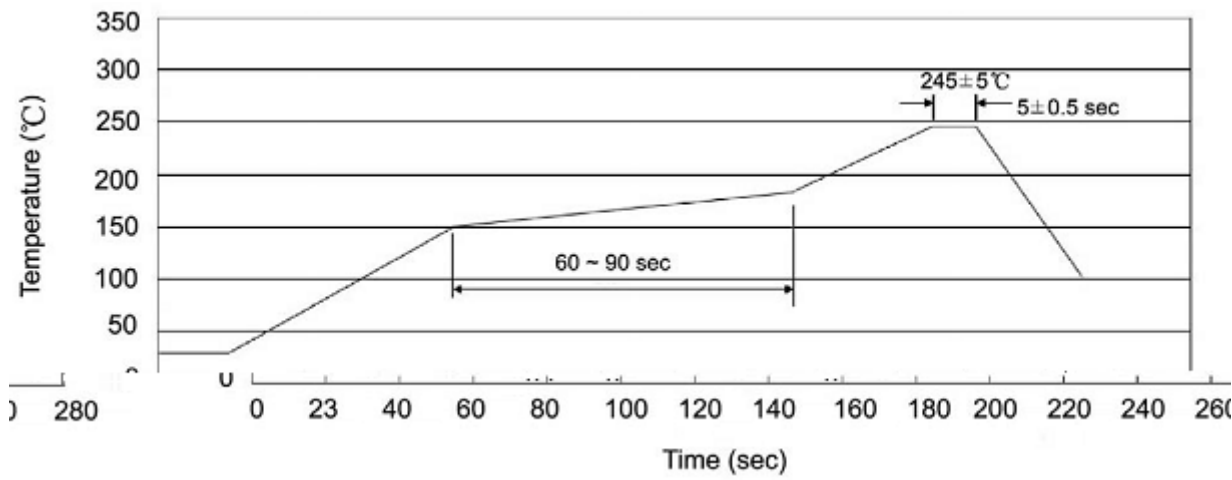

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices