


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


	~	~	~

/ Absolute Maximum Ratings(Ta=25)

		~	

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

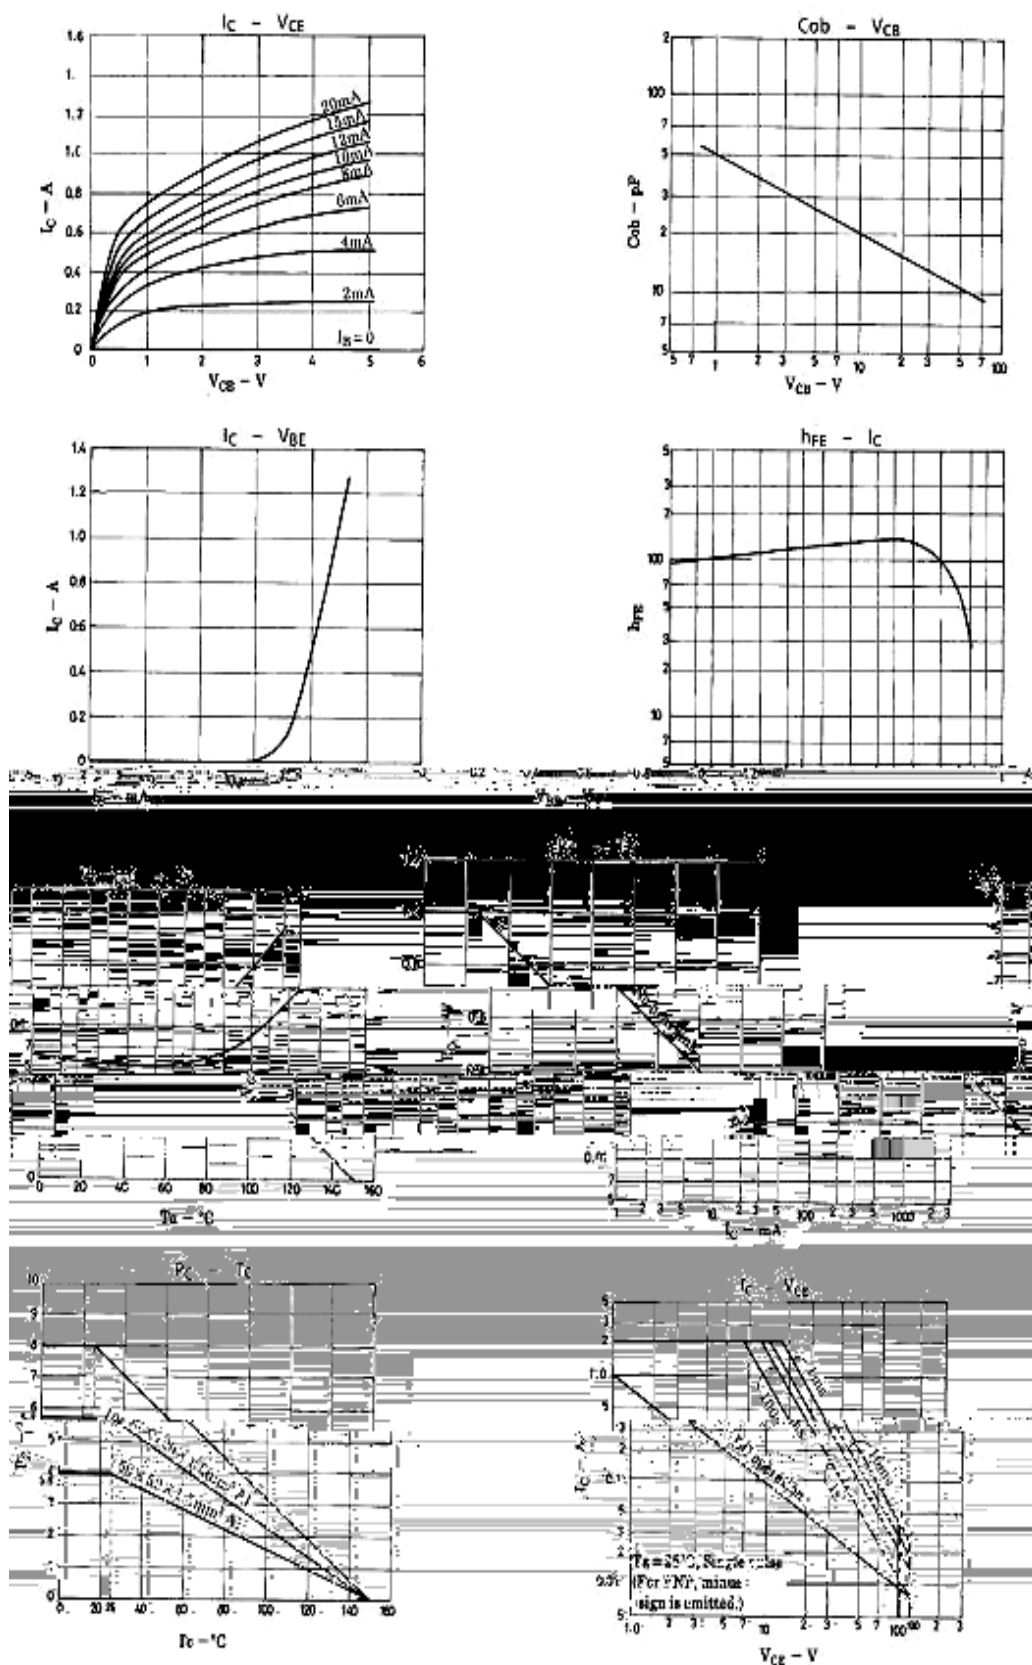

/ Package Dimensions


T□-126F

单位: mm

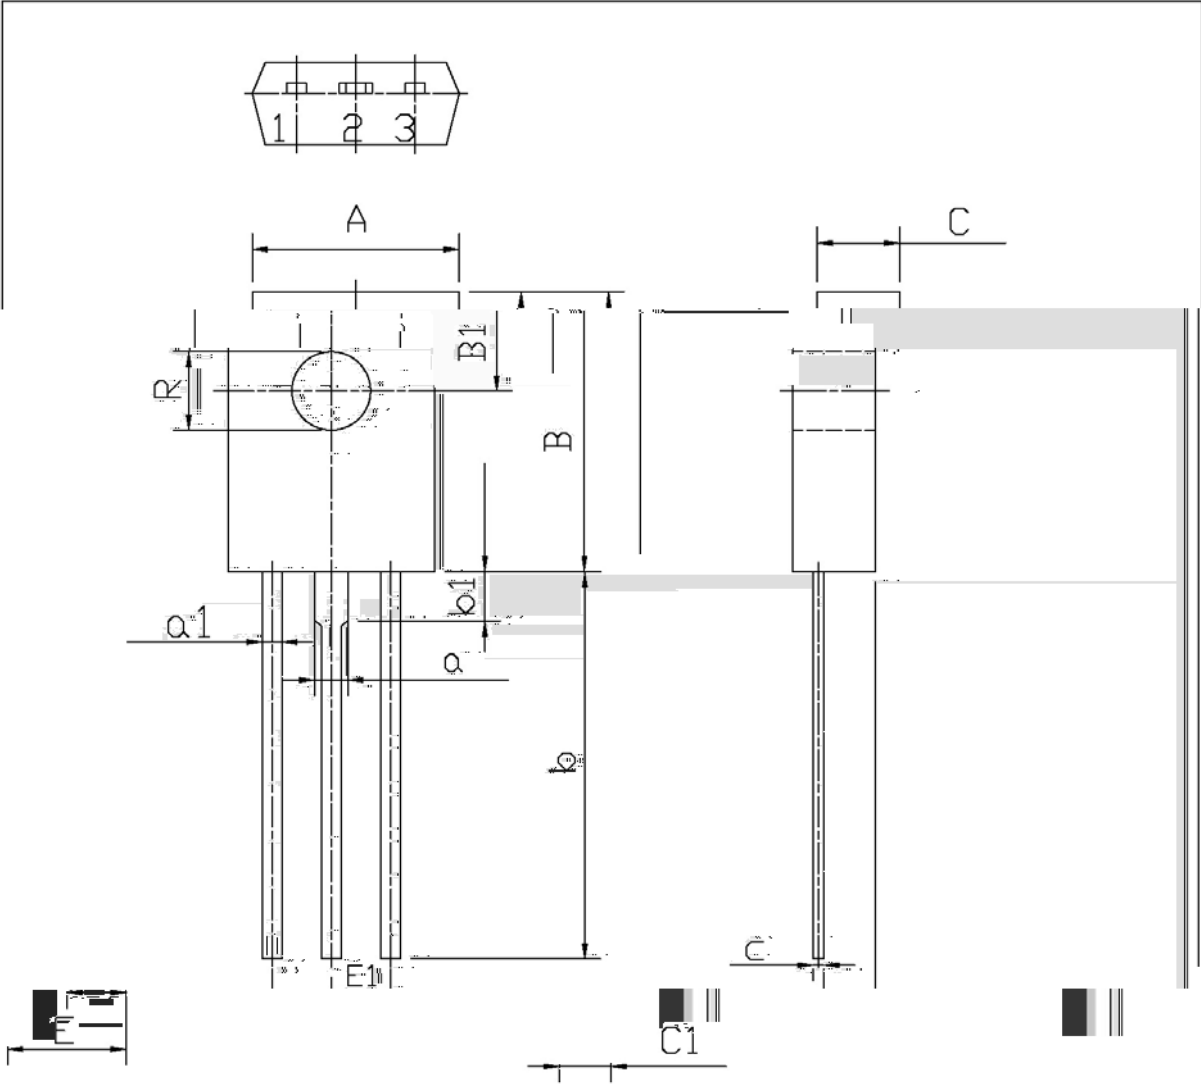


Dimension		Symbol		Symbol	
Min	Max	Min	Max	Min	Max
0.66	0.86	A	7.8	8.2	a1
4.4	4.8	B	10.8	11.2	E1
3.1	3.3	B1	3.8	4.2	C
4.9	5.1	R	0.25	0.35	C1
0.2	0.3	a	1.27	b1	1.9
				E1	

/ Marking Instructions

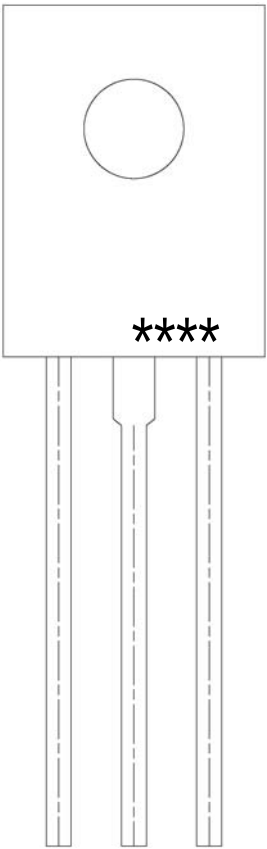

() / Temperature Profile for Dip Soldering(Pb-Free)

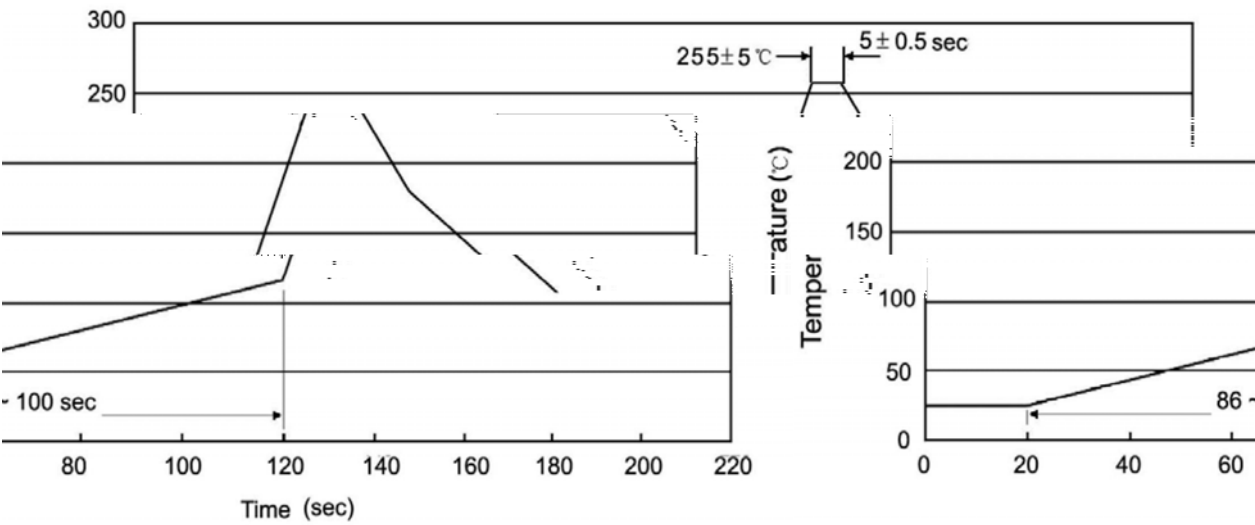

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

封装形式	包装数量	包装尺寸
------	------	------