

[illegible]


/ Descriptions

/ Features

1.0A,

/ Applications

/ Equivalent Circuit or Application Circuit

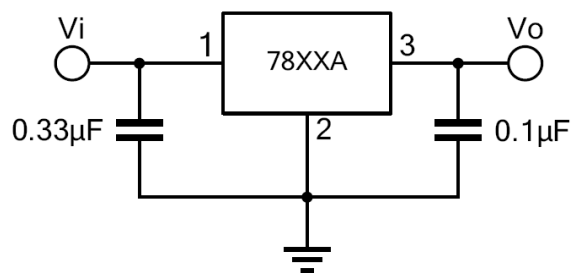

/ Pinning




/ Marking

◦




/ Electrical Characteristic Curve

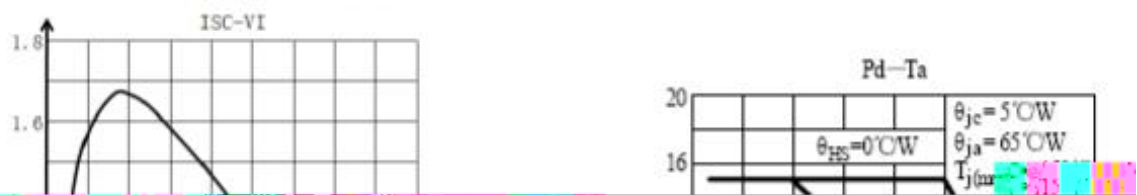



/ Package Dimensions

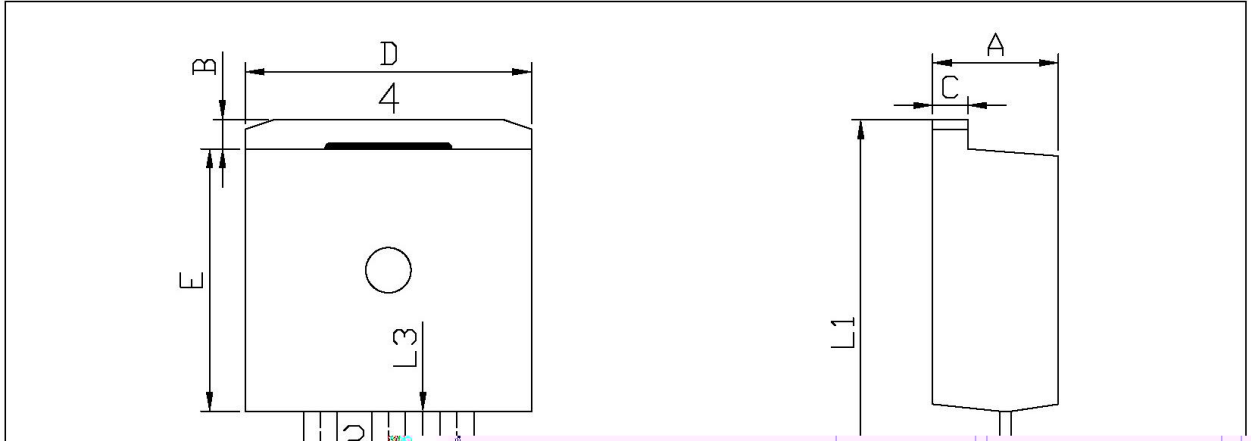


单位: mm




C	1.20	1.40	L3	1.20	1.60
D	9.80	10.20			

TO-263





() / Temperature Profile for IR Reflow Soldering(Pb-Free)

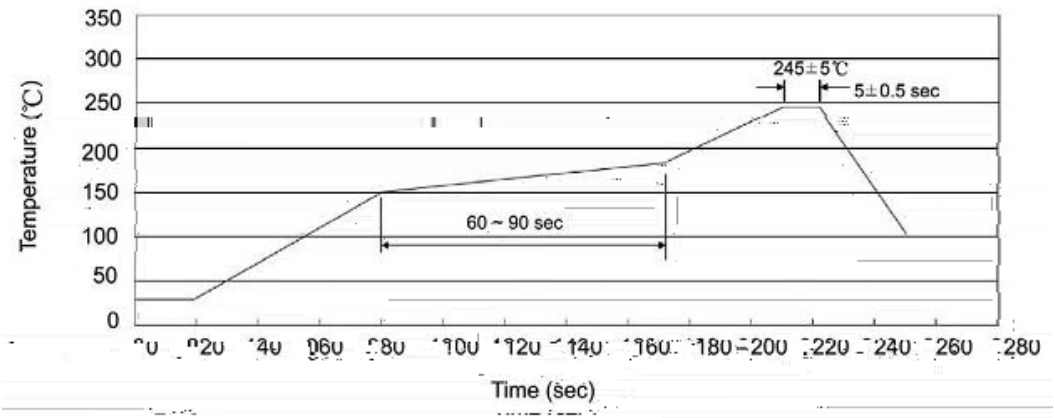

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-263	800	1	800	5	4,000	13" × 24	360×360×50	385×257×392

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱

