

/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit



/ Pinning

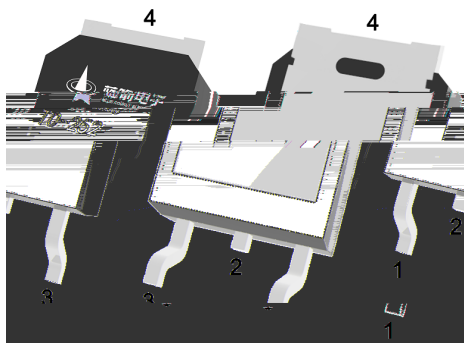

/ Marking







78D05




蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

/ Electrical Characteristic Curve

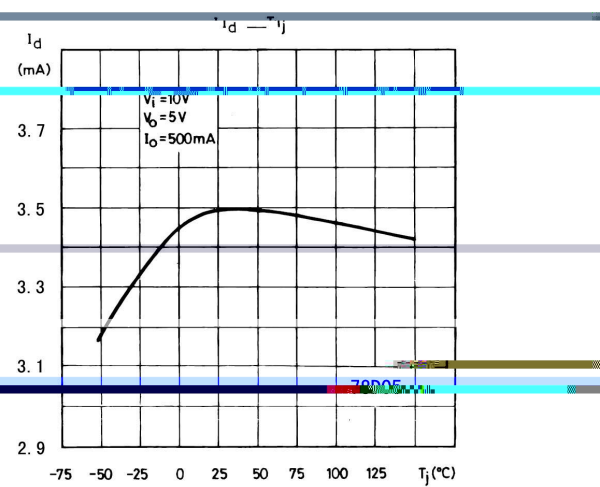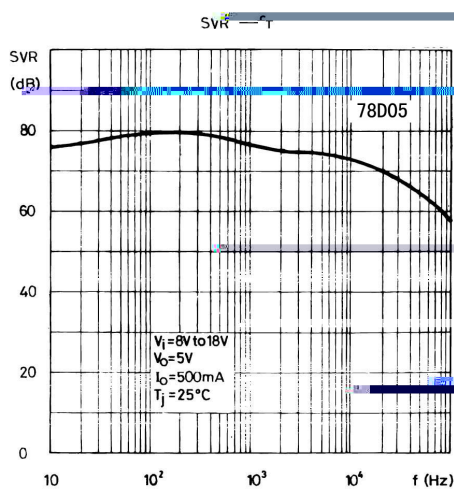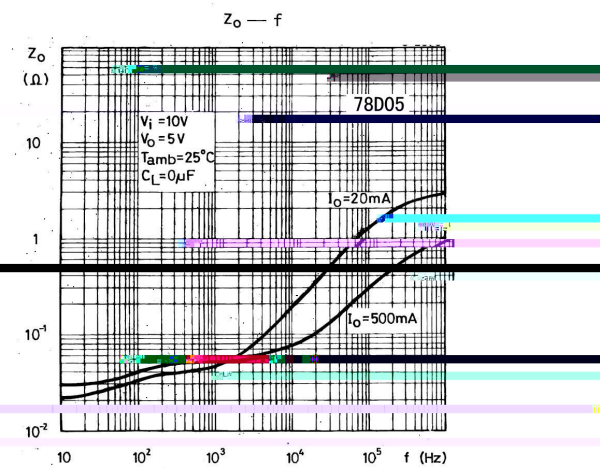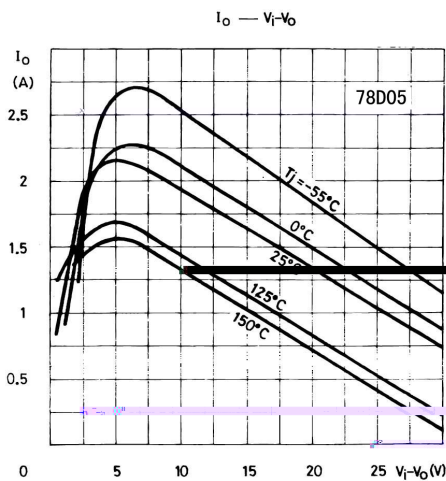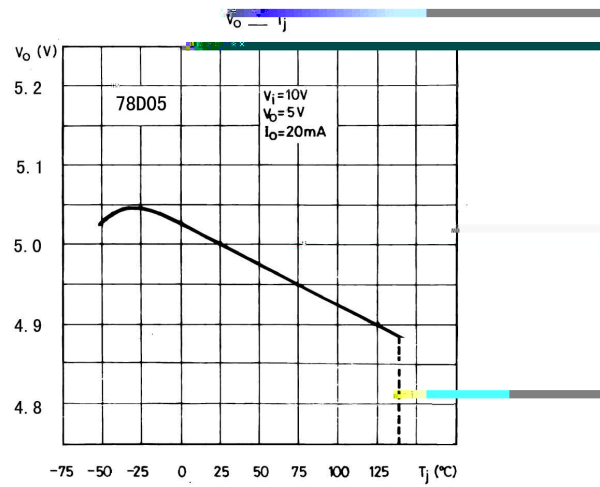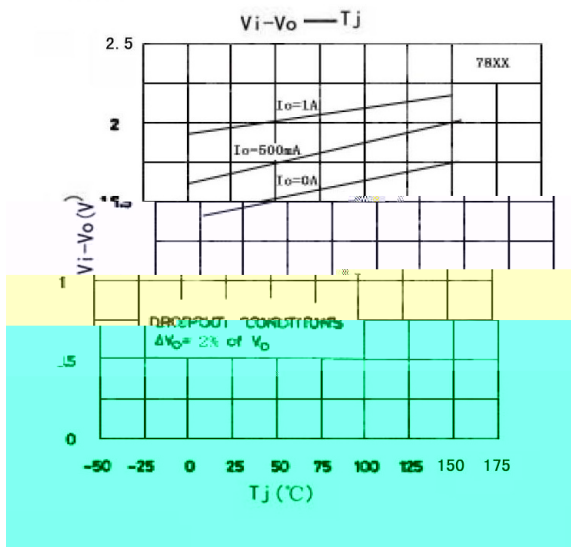

/ Package Dimensions

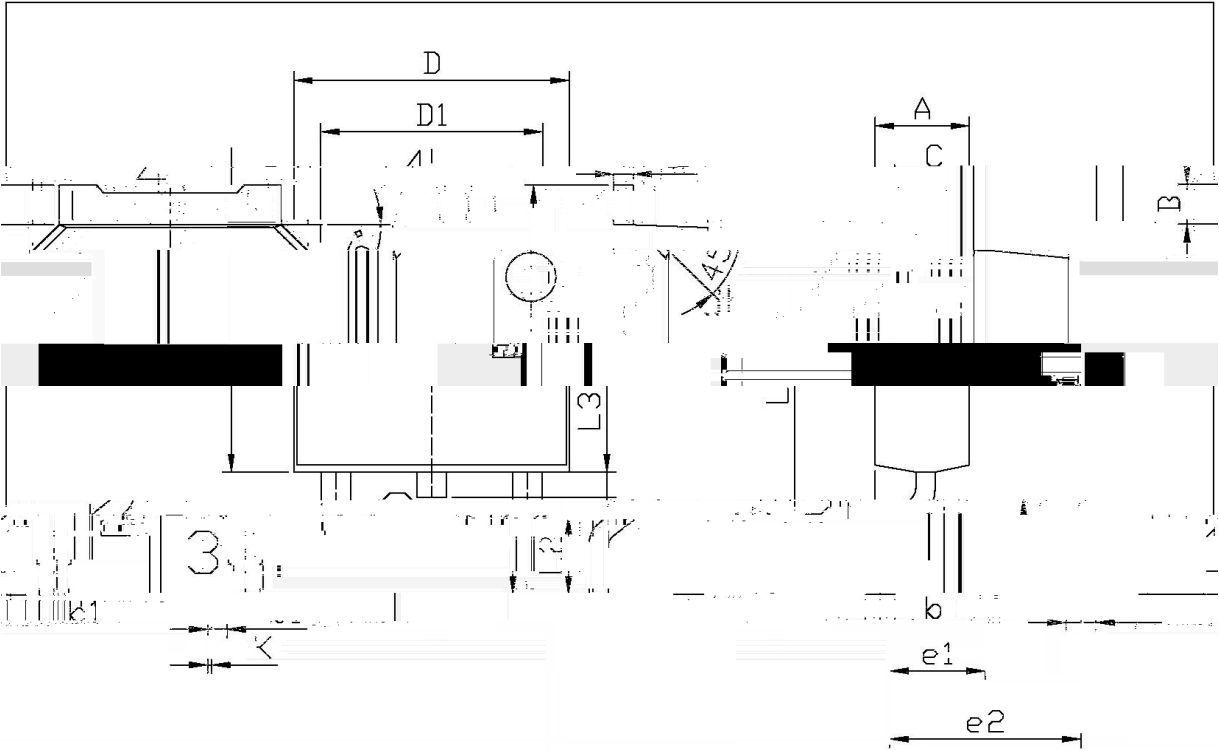

单位: mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	2.24	2.34	B	0.95	1.25
C	4.42	4.73	D	0.45	0.55
D1	9.85	10.35	E	1.70	2.00
E	0.45	0.55	F	0.60	0.90
F	0.60	0.90	G	0.60	0.90
G	0.60	0.90	H	0.60	0.90
H	0.60	0.90	I	0.60	0.90
I	0.60	0.90	J	0.60	0.90
J	0.60	0.90	K	0.60	0.90
K	0.60	0.90	L	0.60	0.90
L	0.60	0.90	M	0.60	0.90
M	0.60	0.90	N	0.60	0.90
N	0.60	0.90	O	0.60	0.90
O	0.60	0.90	P	0.60	0.90
P	0.60	0.90	Q	0.60	0.90
Q	0.60	0.90	R	0.60	0.90
R	0.60	0.90	S	0.60	0.90
S	0.60	0.90	T	0.60	0.90
T	0.60	0.90	U	0.60	0.90
U	0.60	0.90	V	0.60	0.90
V	0.60	0.90	W	0.60	0.90
W	0.60	0.90	X	0.60	0.90
X	0.60	0.90	Y	0.60	0.90
Y	0.60	0.90	Z	0.60	0.90
Z	0.60	0.90			

252

TO-2

78D05

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
--	-----------------	----------------------	----------------------	----------------------------	----------------------	------	-----------	-----------