

/ Descriptions


SOT-323 PNP

/ Features


P_C , h_{FE} , 9014W

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking


/ Absolute Maximum Ratings(Ta=25 –)

/ Electrical Characteristics(Ta=25 –)


I Electrical Characteristic Curve

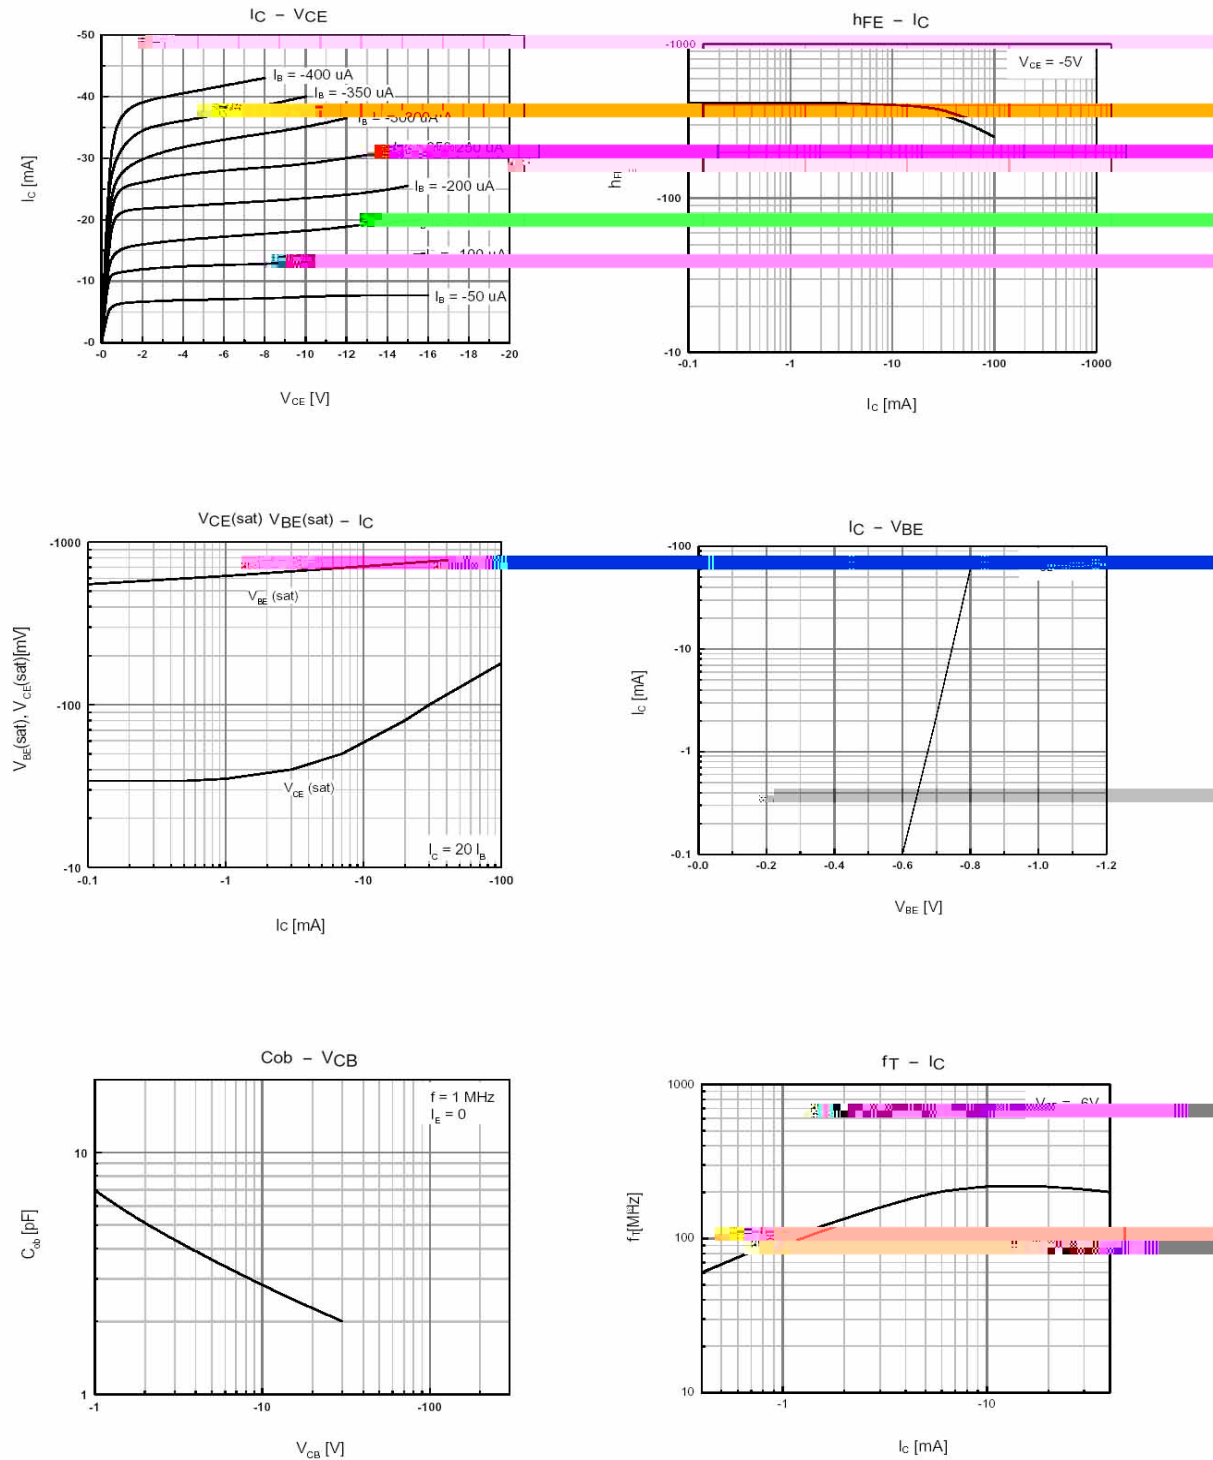

/ Package Dimensions

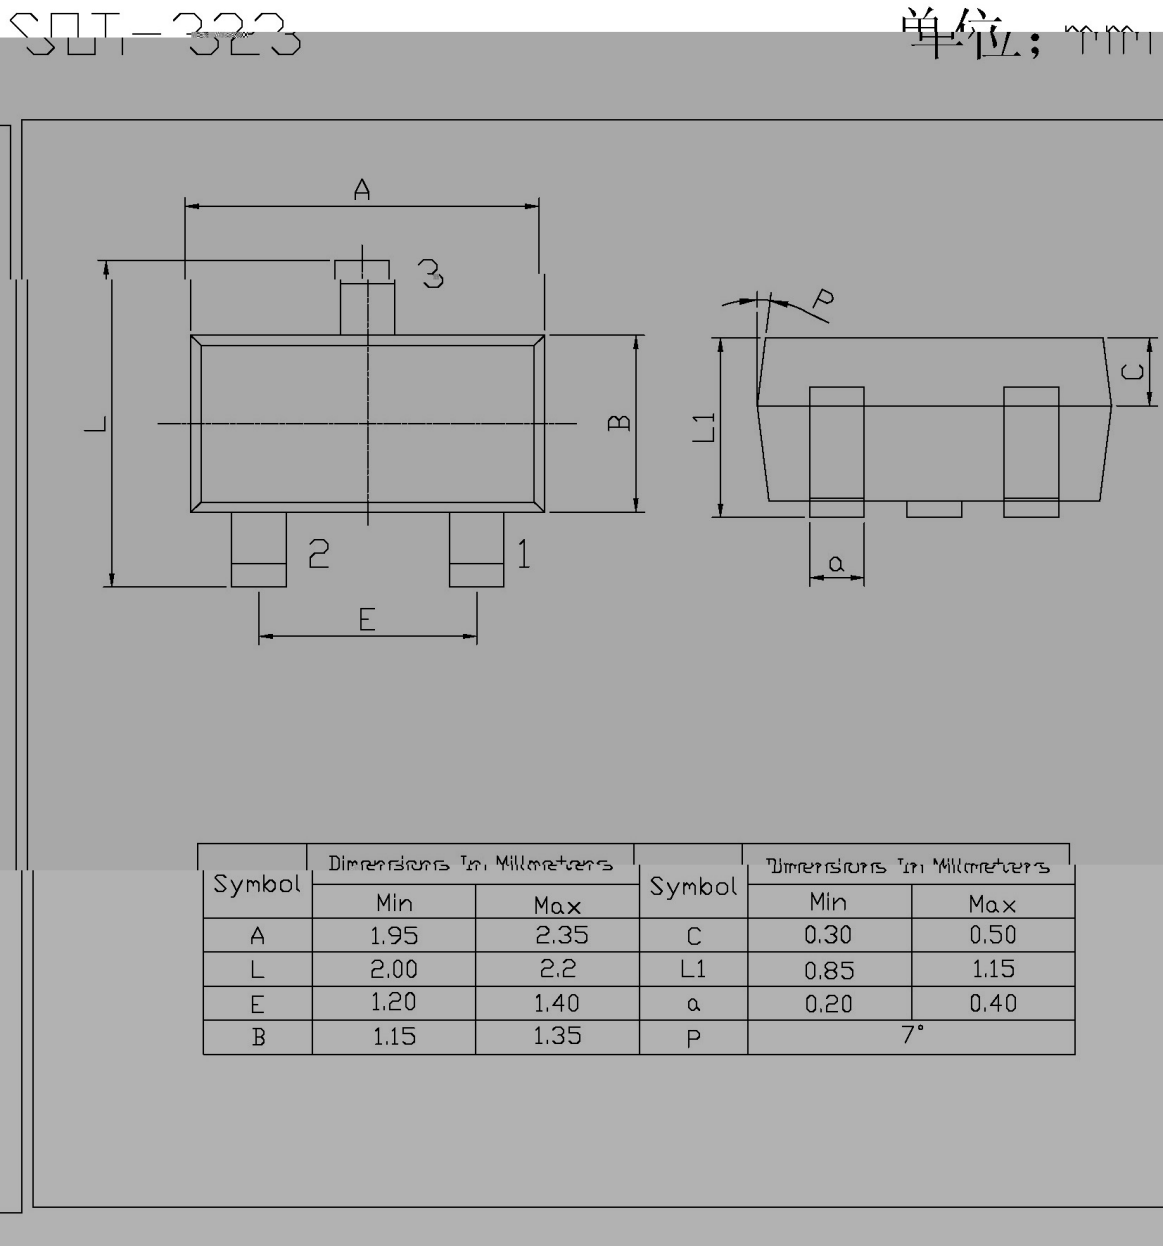


/ Marking Instructions

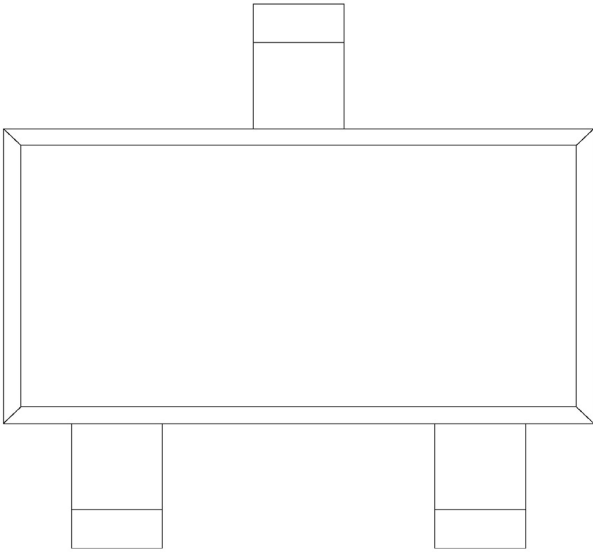

H	
M6	
A	h_{FE}

() / Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

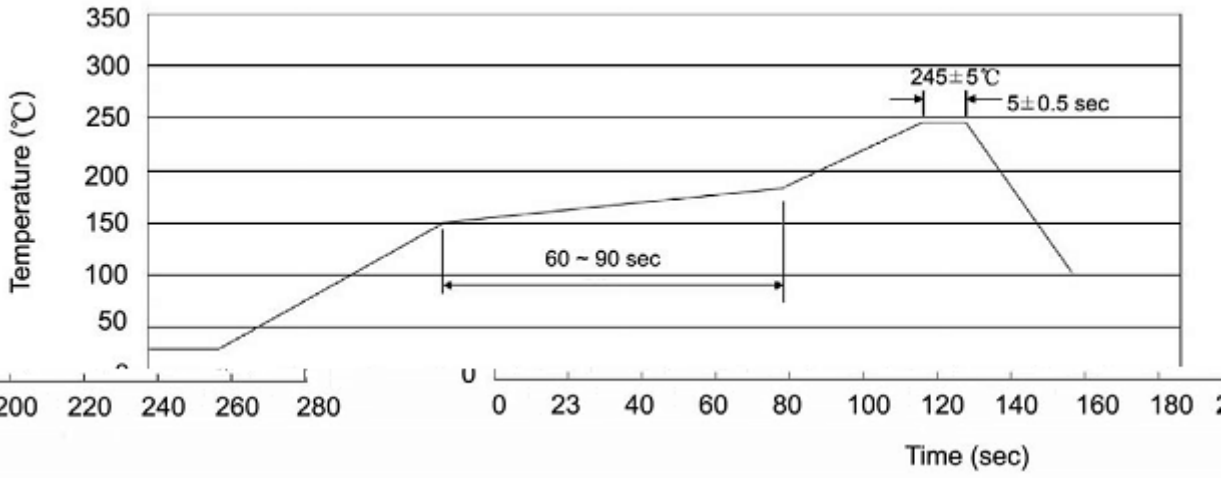

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices