


/ Descriptions

,


/ Features

/ Applications


/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)



/ Marking

/ Absolute Maximum Ratings(Ta=25 –)


°								
()								
()	θ							℃
	θ							℃
								℃

× ×)

/ Electrical Characteristics(Ta=25 –)


		℃		μ
		℃		
		℃		

/ Electrical Characteristic Curve

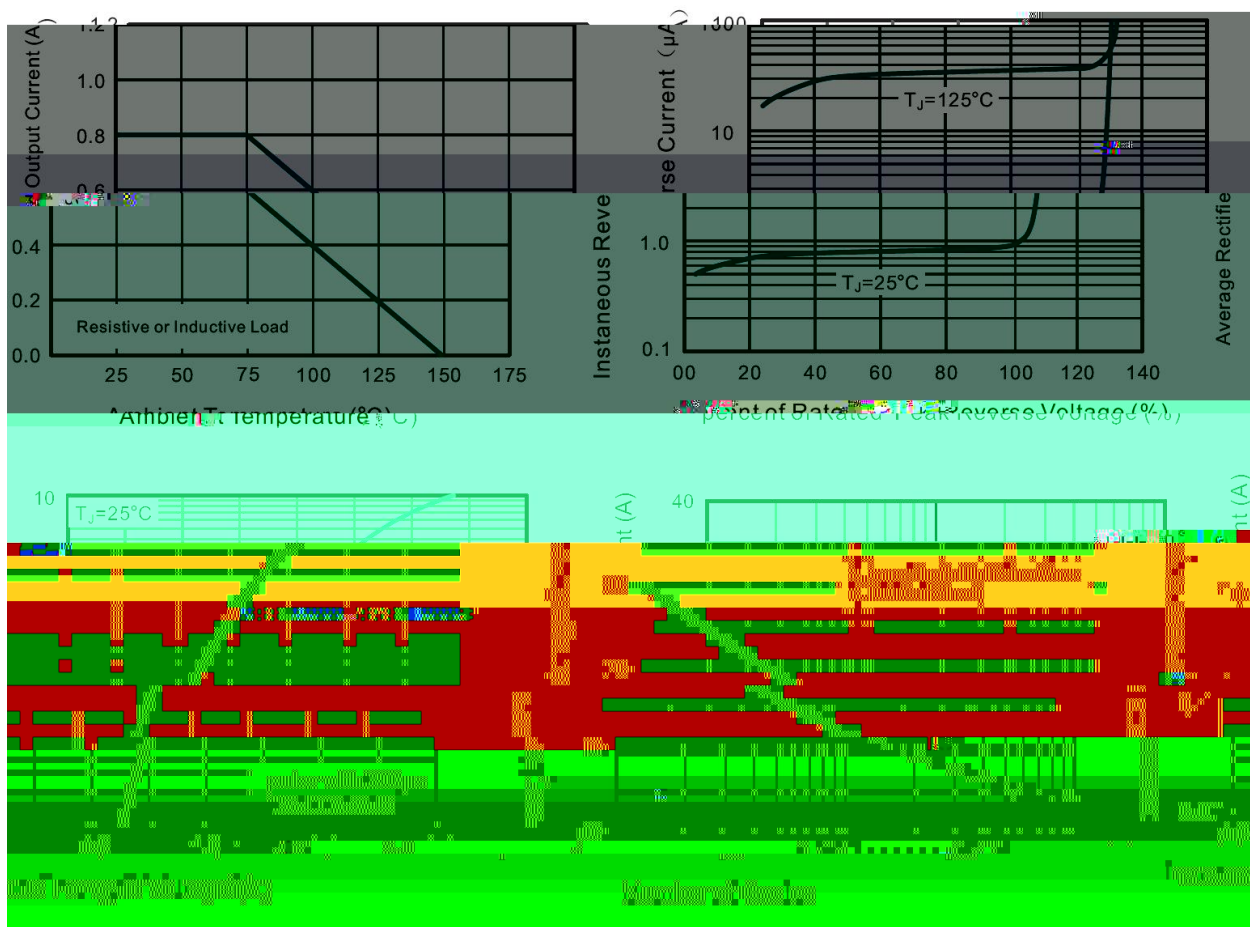

/ Package Dimensions


ABS/LBF

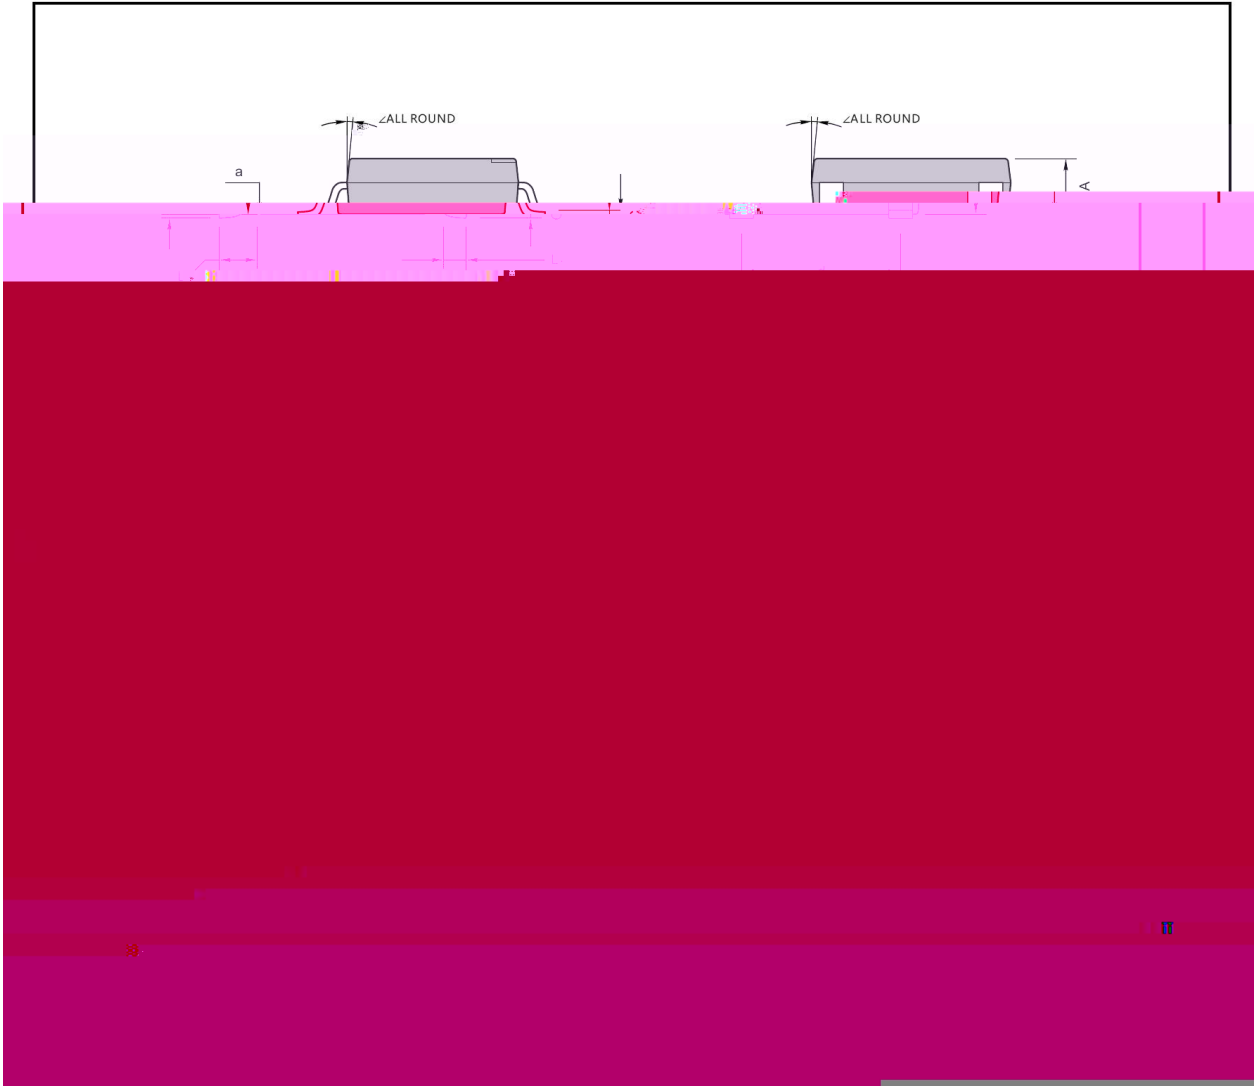


/ Marking Instructions

Marking


Type number	Marking code
ABS1	ABS1
ABS2	ABS2
ABS4	ABS4
ABS6	ABS6
ABS8	ABS8
ABS10	ABS10

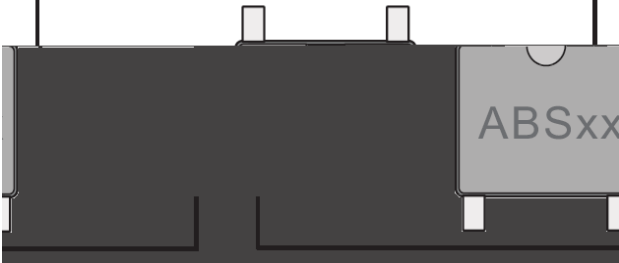

/ Marking Instructions

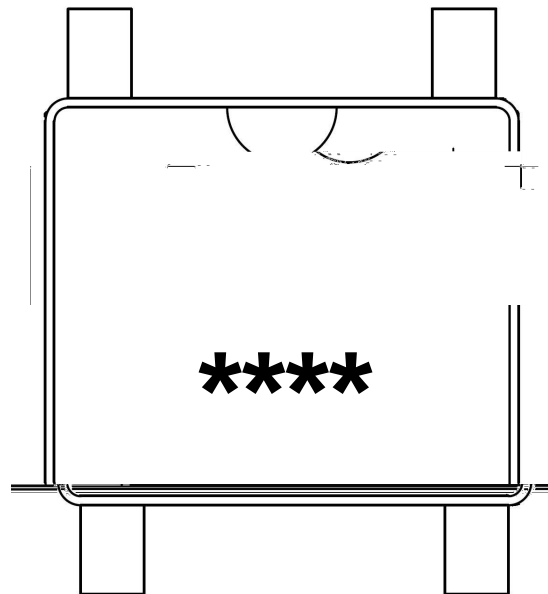

() / Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

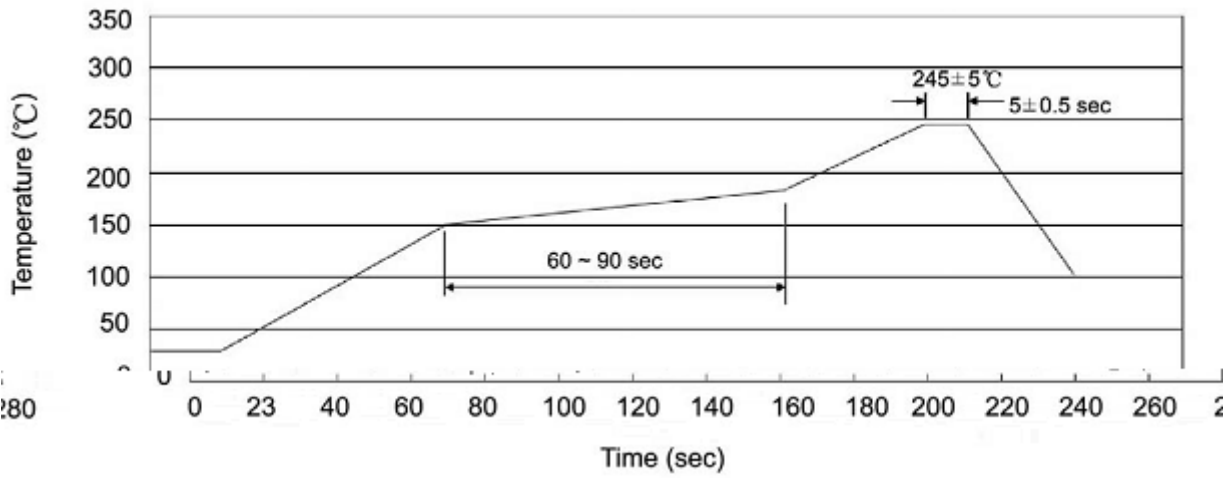

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

						"		

/ Notices