

修订记录 / Revised record

[illegible]


描述 / Descriptions

SOT-23


特征 / Features

用途 / Applications

内部等效电路 / Equivalent Circuit






引脚排列 / Pinning




放大及印章代码 / h_{FE} Classifications & Marking

--	--

电参数曲线图 / Electrical Characteristic Curve

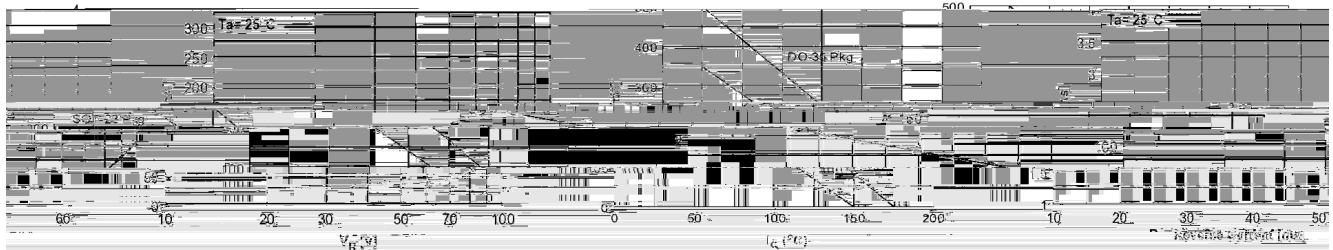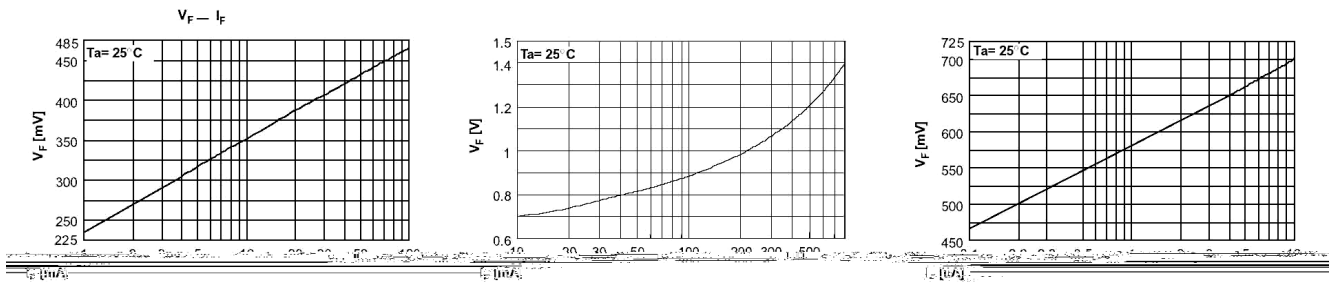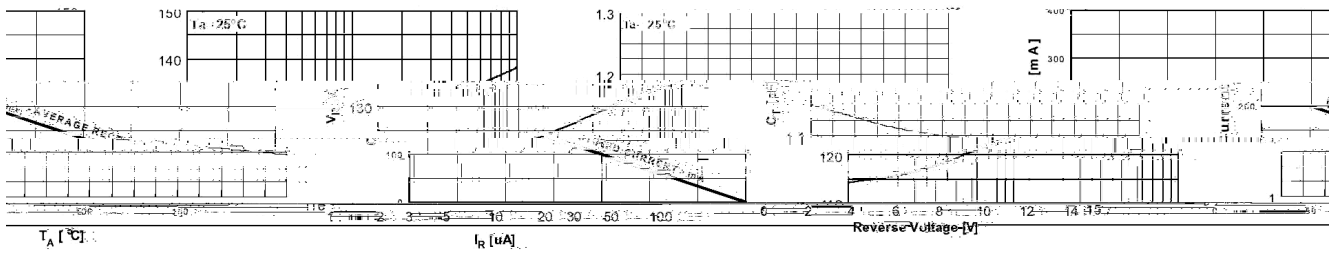


外形尺寸图 / Package Dimensions

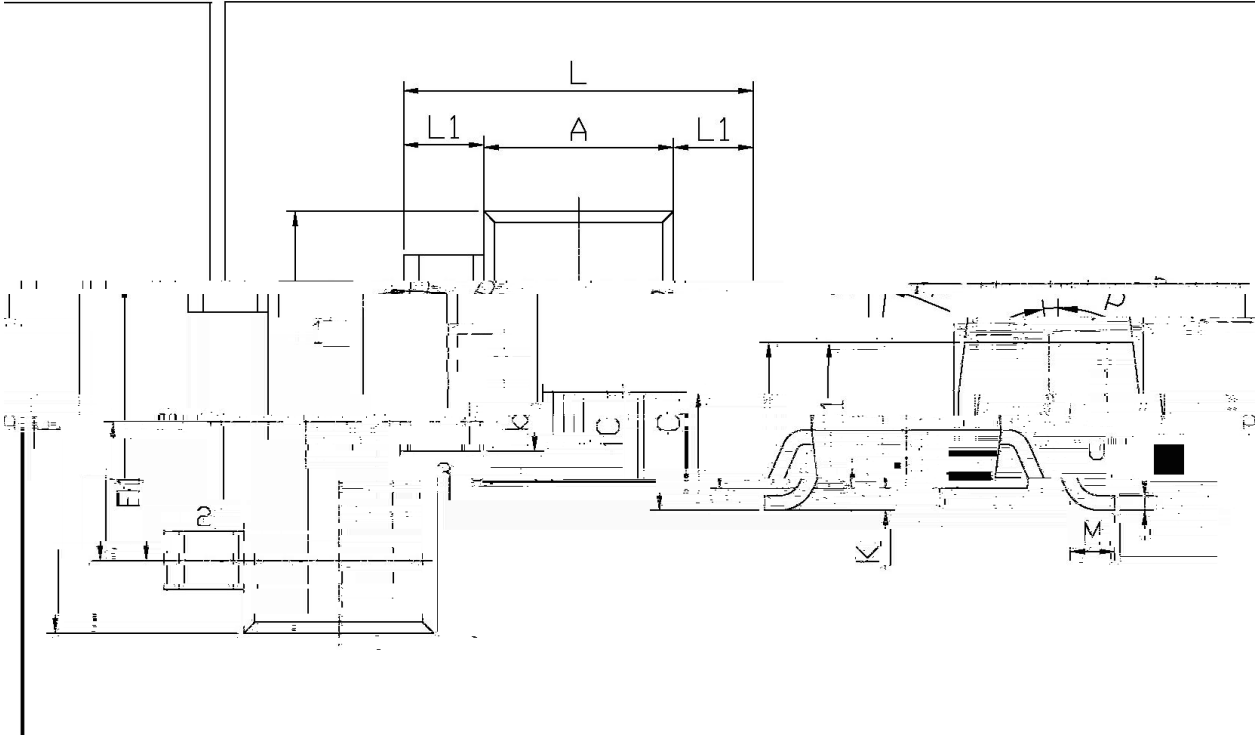


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
1.20			0.45	0.65	0.90
0.20			A	1.50	0.05
0.10			B	3.10	0
0.20			1.20	0.65	0.90
0.10			0.35	0.35	0.55
0.10			0.35	0.35	0.55

印章说明 / Marking Instructions

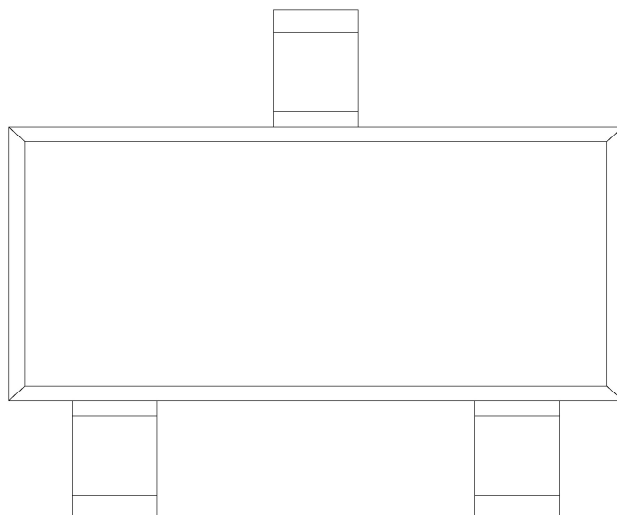

H
A6

回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)

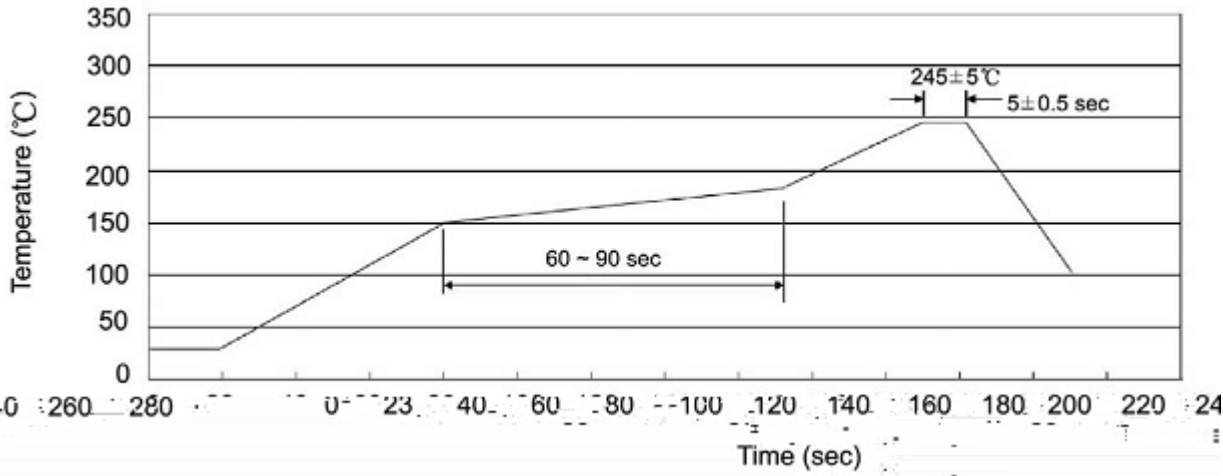

± ± ± ±

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

± ± °C

包装规格 / Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

使用说明 / Notices