


A	2022-8-9	all			





SOD-323

Schottky Diode in a SOD-323 Plastic Package.

Schottky diodes,HF Product.


Small signal diode.

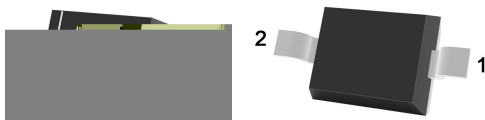

PIN1:Cathode


PIN2:Anode

Marking	H86
---------	-----




Parameter	Symbol	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}	30	V
Continuous forward current	I_F	200	mA
Surge non repetitive forward current	I_{FSM}	600	mA
Power Dissipation	P_D	250	mW
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	430	$^{\circ}\text{C}/\text{W}$
Junction Temperature Range	T_J	150	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-55~150	$^{\circ}\text{C}$



Parameter	Symbol	Test Conditions	Rating		Unit
			MIN	MAX	
Reverse Voltage	V_R	$I_R=10\mu\text{A}$	30		V
Peak Forward voltage	V_F	$I_F=0.1\text{mA}$		240	mV
		$I_F=1.0\text{mA}$		320	mV
		$I_F=10\text{mA}$		400	mV
		$I_F=30\text{mA}$		500	mV
		$I_F=100\text{mA}$		0.8	V
Instantaneous Reverse Current	I_R	$V_R=25\text{V}$		2.0	μA
Total capacitance	C_T	$V_R=1.0\text{V}$ $f=1.0\text{MHz}$		10	pF
Reverse recovery time	t_{rr}	$I_{RR}=1.0\text{mA}$ $R_L=100\Omega$ $I_F=10\text{mA}$		5.0	ns



Rev.A Aug.-2022

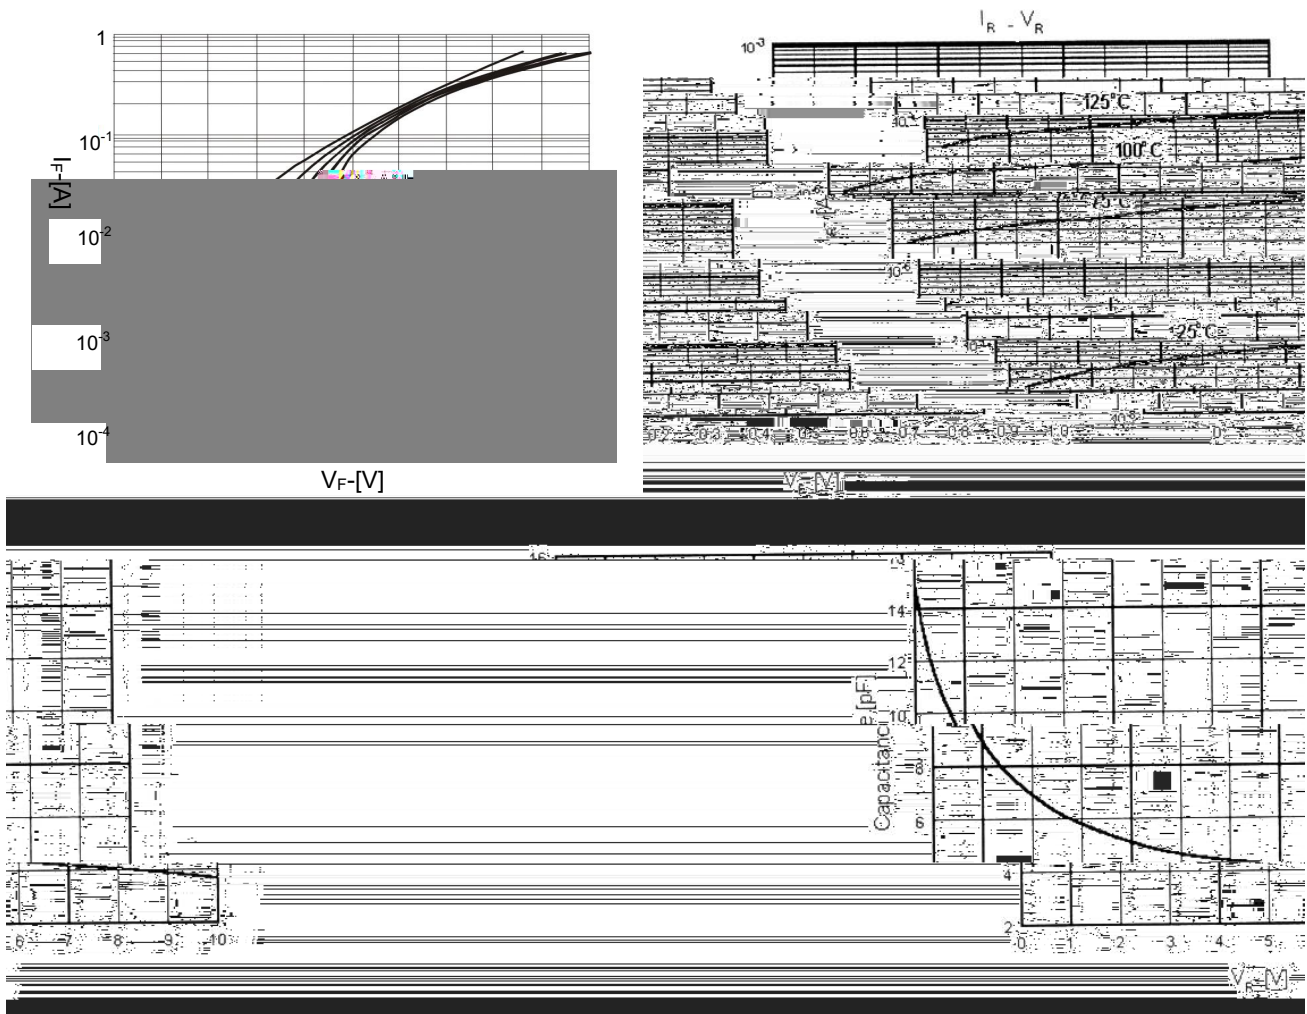

Rev.A Aug.-2022

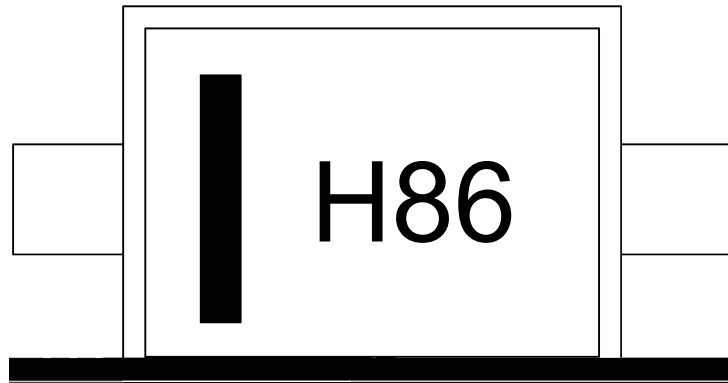

说明：



H： 为公司代码

86： 为型号代码

Note:

H: Company Code

86: Product Type

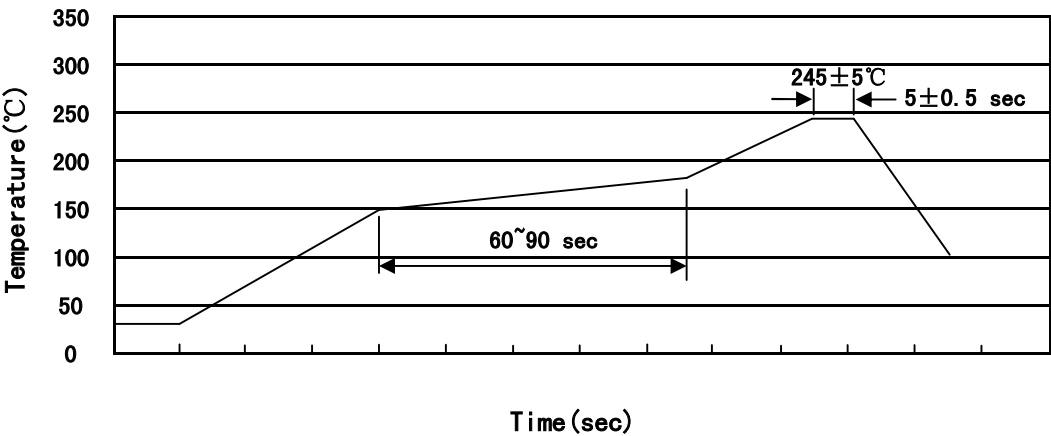

- Note:
- 1

150 180

60 90sec;

1.Preheating:150~180°C, Time:60~90sec.

2

245±5

5±0.5sec;

2.Peak Temp.:245±5°C, Duration:5±0.5sec.

3

2 10°C/sec.

3. Cooling Speed: 2~10°C/sec.

260±5°C

10±1 sec.

Temp.:260±5°C

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOD-323	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205