


BC860

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		μ				
		μ				
						μ
		Ω	μ			


/ Electrical Characteristic Curve

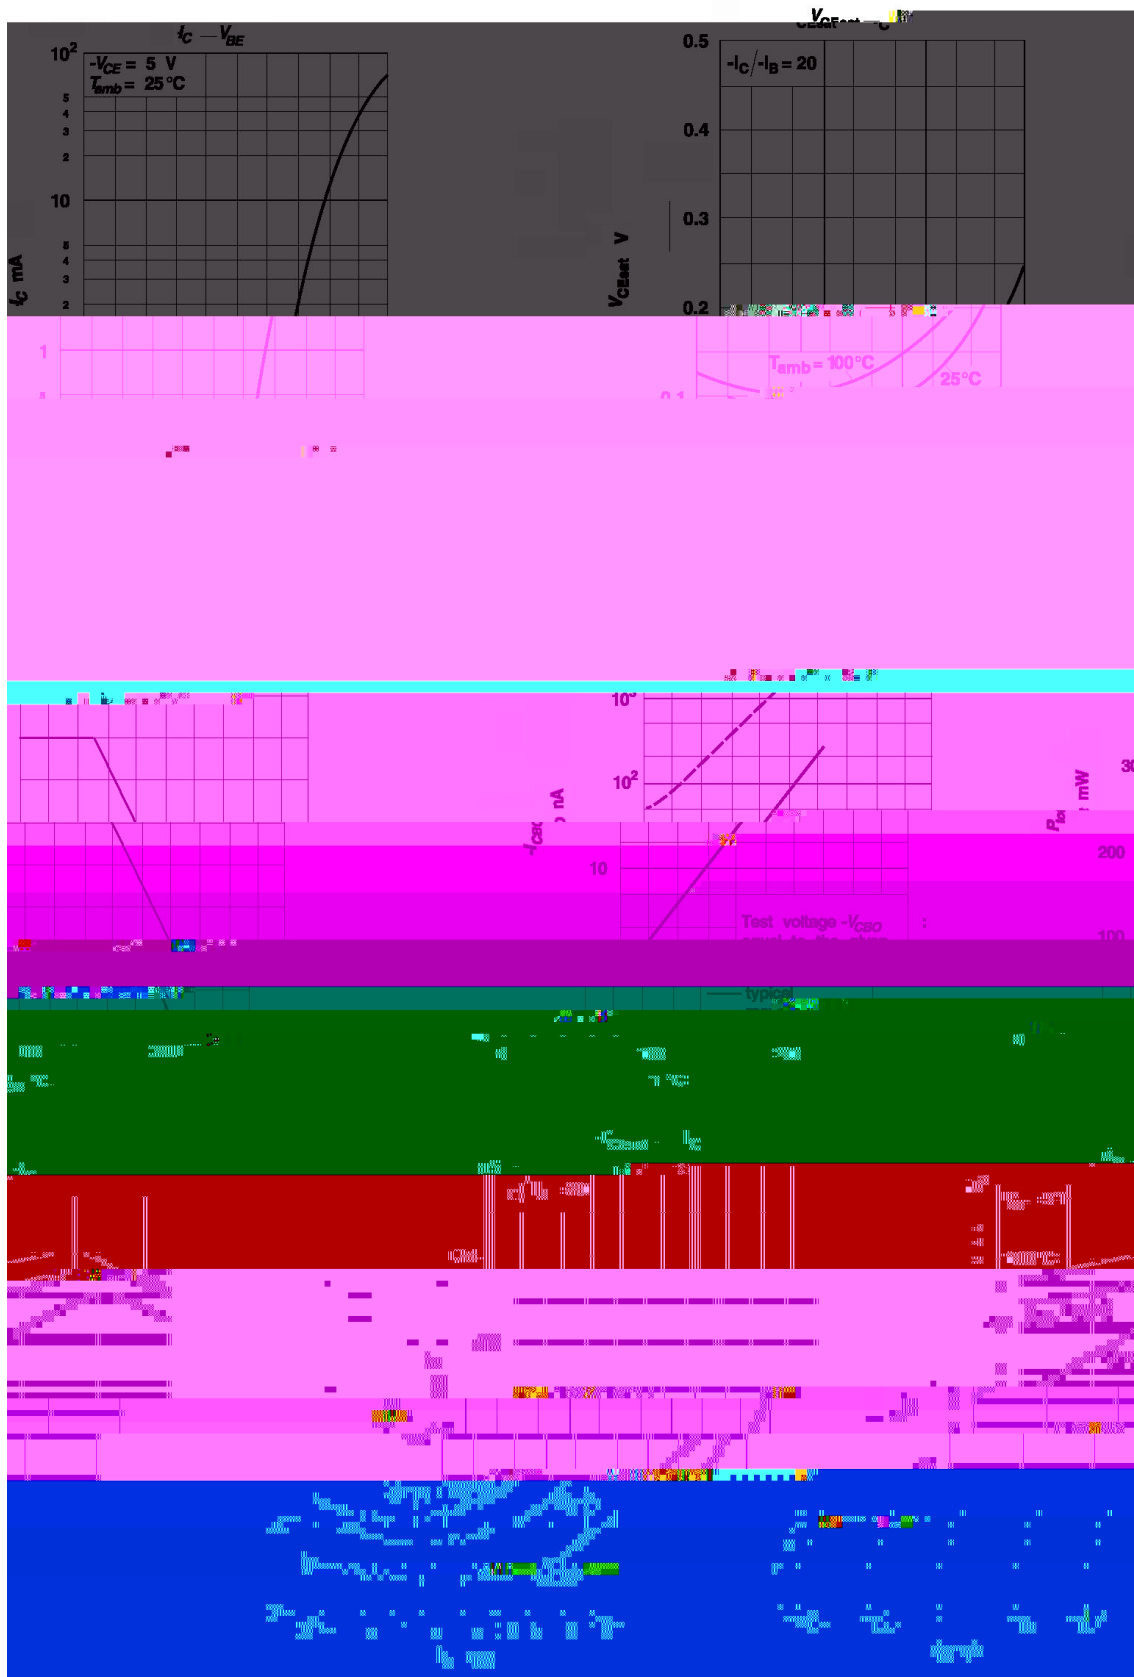

/ Package Dimensions


SOT-23

单位：mm

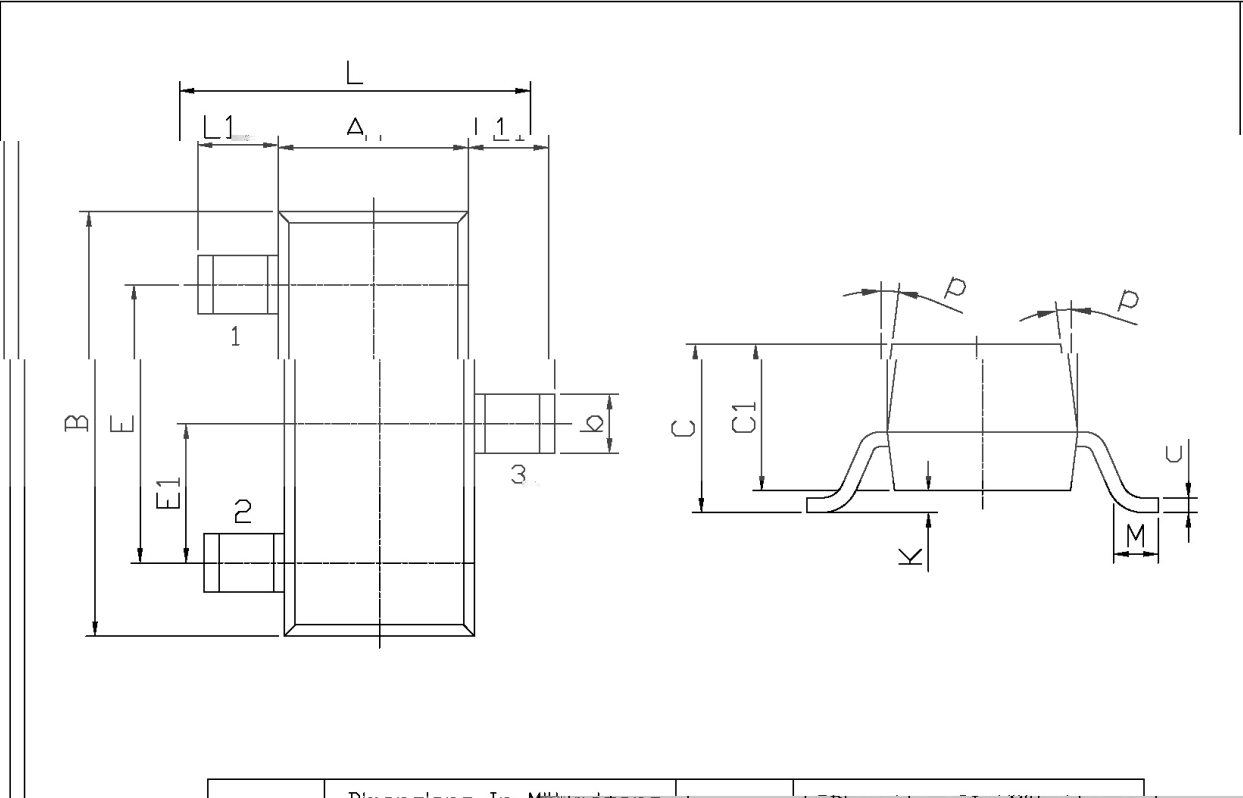


Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
L	2.9	3.7	C	1.00	1.27
L1	0.65	0.95	C1	0.35	0.55
A1	0.35	0.55	p	0.35	0.55
l1	0.10	0.15	K	0.10	0.15
B	0.95	1.27	M	0.10	0.15
E	0.65	0.95			
E1	0.10	0.15			
b	0.10	0.15			
t	0.05	0.08			

/ Marking Instructions

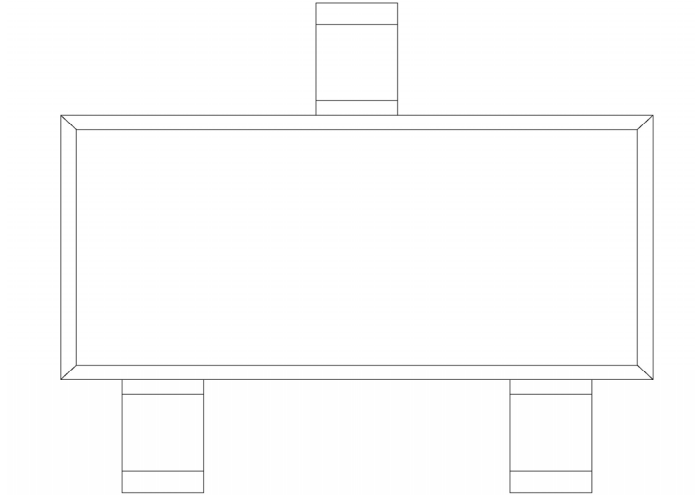

() /

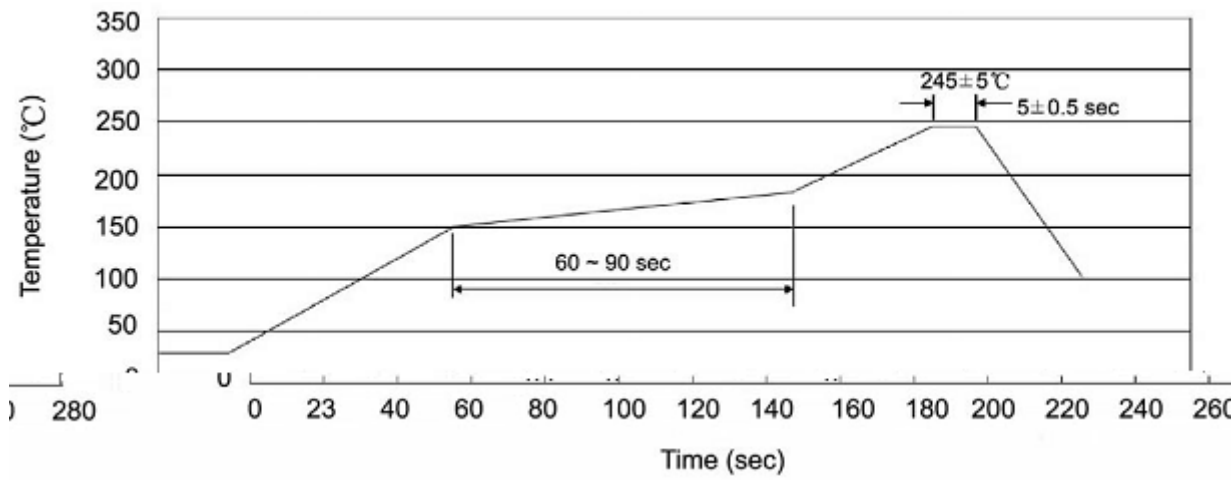

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices