

/ Descriptions


Silicon PNP transistor in a TO-18 Plastic Package.

/ Features

Complementary pair with BD237.

/ Applications

Medium power linear and switching applications.

/ Equivalent Circuit**/ Pinning**

PIN1 Emitter PIN 2 Collector PIN 3 Base

/ h_{FE} Classifications & Marking

See Marking Instructions

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-100	V
Collector to Emitter Voltage	V_{CEO}	-80	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-2.0	A
Collector Current – Continuous	I_{CM}	-6.0	A
Collector Power Dissipation	$P_C(T_C=25^{\circ}C)$	20	W
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature Range	T_{stg}	-55 150	$^{\circ}C$


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Emitter Breakdown Voltage	$*V_{CEO}$	$I_C=-100mA$ $I_B=0$	-80			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-80V$ $I_E=0$			-0.1	mA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-5.0V$ $I_C=0$			-1.0	mA
DC Current Gain	$*h_{FE(1)}$	$V_{CE}=-2.0V$ $I_C=-150mA$	40			
	$*h_{FE(2)}$	$V_{CE}=-2.0V$ $I_C=-1.0A$	25			
Collector to Emitter Saturation Voltage	$*V_{CE(sat)}$	$I_C=-1.0A$ $I_B=-0.1A$			-0.6	V
Base to Emitter Voltage	$*V_{BE}$	$V_{CE}=-2.0V$ $I_C=-1.0A$			-1.3	V
Transition Frequency	f_T	$V_{CE}=-10V$ $I_C=-250mA$	3.0			MHz

* Pulse test: pulse width =300μs;duty cycle 1.5%.

μ


/ Electrical Characteristic Curve

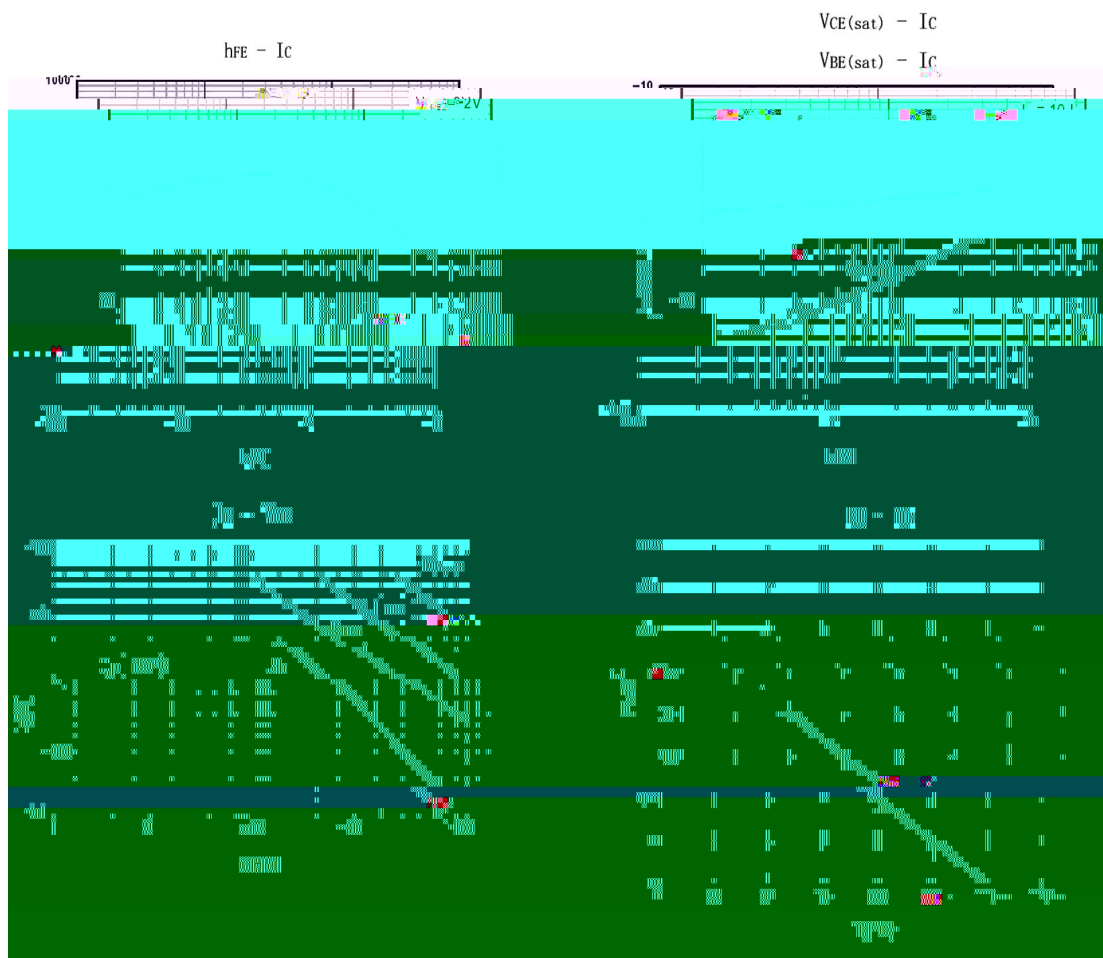


/ Package Dimensions

BU-126T

单位: mm

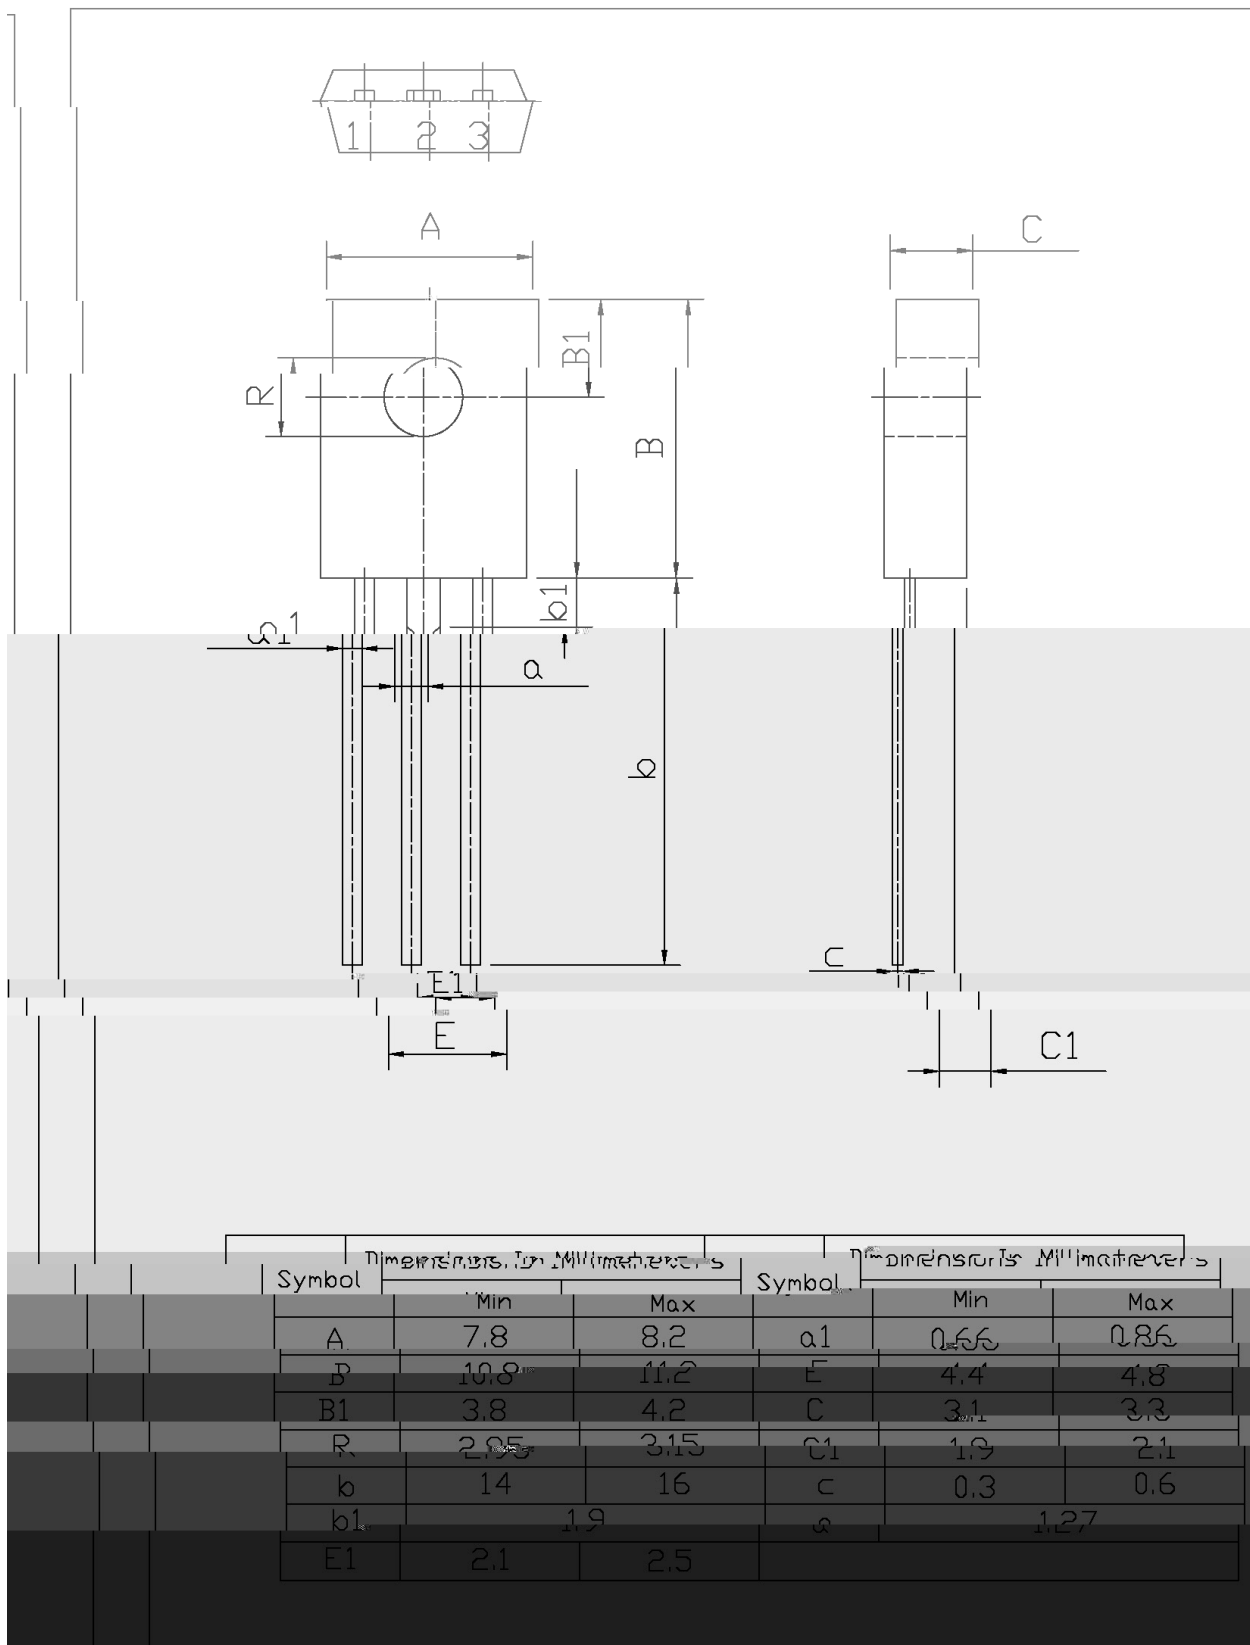

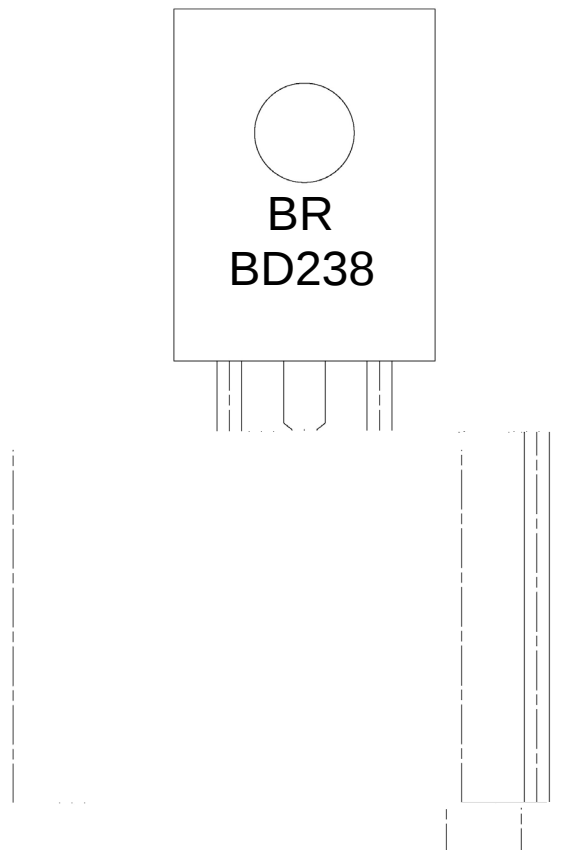/ Marking Instructions


Note:

BR: Company Code

BD238: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

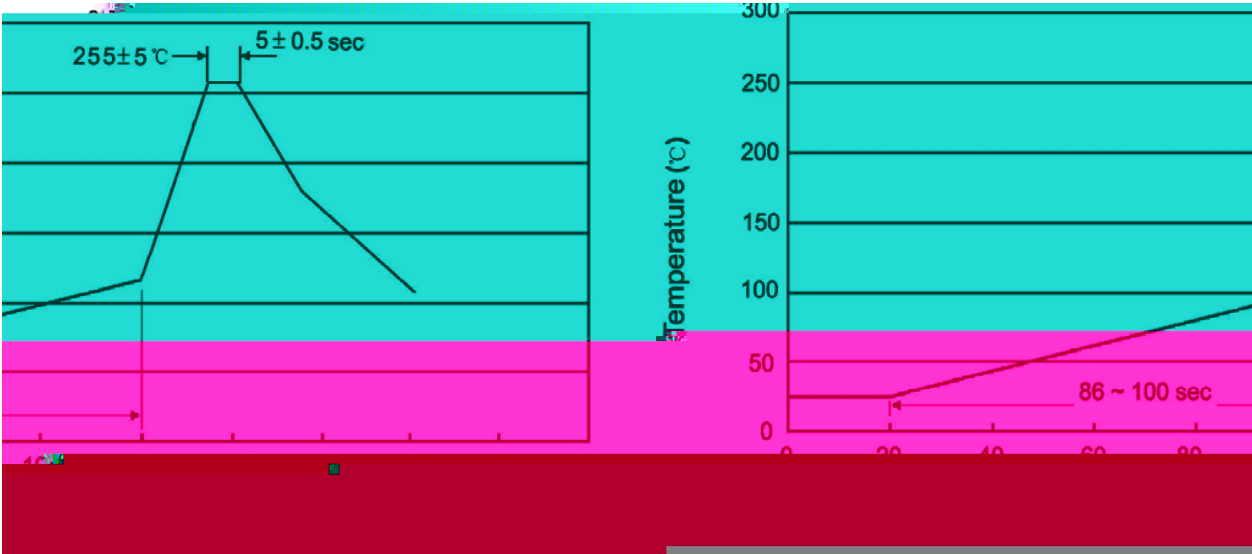

- Note:

 1. Preheating: 25~150 , Time: 60~90sec.
 2. Peak Temp.: 255 ± 5 , Duration: 5 ± 0.5sec.
 3. Cooling Speed: 2~10 /sec.
- 1 25 150 60 90sec;

2 255 5 5 0.5sec;

3 2 10 /sec.

/ Resistance to Soldering Heat Test Conditions

270 ± 5 10 ± 1 sec. Temp.: 270±5°C Time: 10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units	Dimension	(unit mm ³)
--------------	-------	-----------	-------------------------