


**/ Descriptions**

TO-126F      PNP

**/ Features**

BD433

**/ Applications****/ Equivalent Circuit****/ Pinning****/  $h_{FE}$  Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25 )

|  |   |   |  |
|--|---|---|--|
|  |   |   |  |
|  |   |   |  |
|  |   |   |  |
|  |   |   |  |
|  |   |   |  |
|  |   |   |  |
|  |   |   |  |
|  |   |   |  |
|  | ℃ |   |  |
|  |   |   |  |
|  |   | ~ |  |

/ Electrical Characteristics(Ta=25 )

|  |  |  |  |  |  |   |
|--|--|--|--|--|--|---|
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  | μ |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |
|  |  |  |  |  |  |   |


# Electrical Characteristic Curve

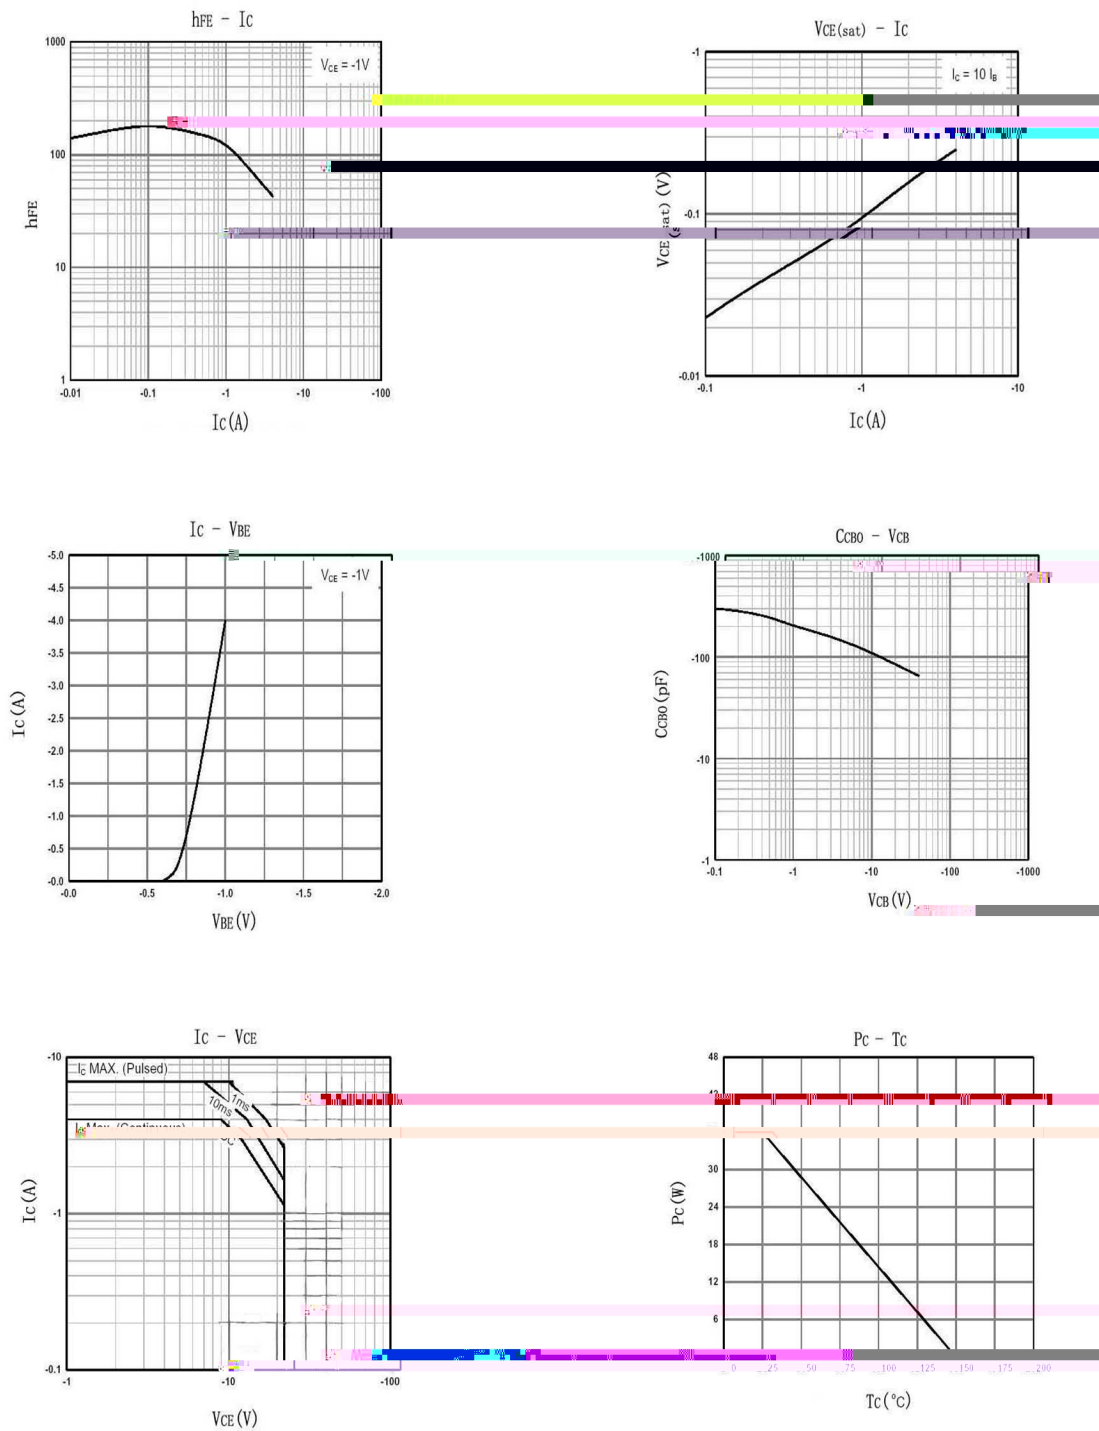


/ Package Dimensions

BU-126T

单位: mm

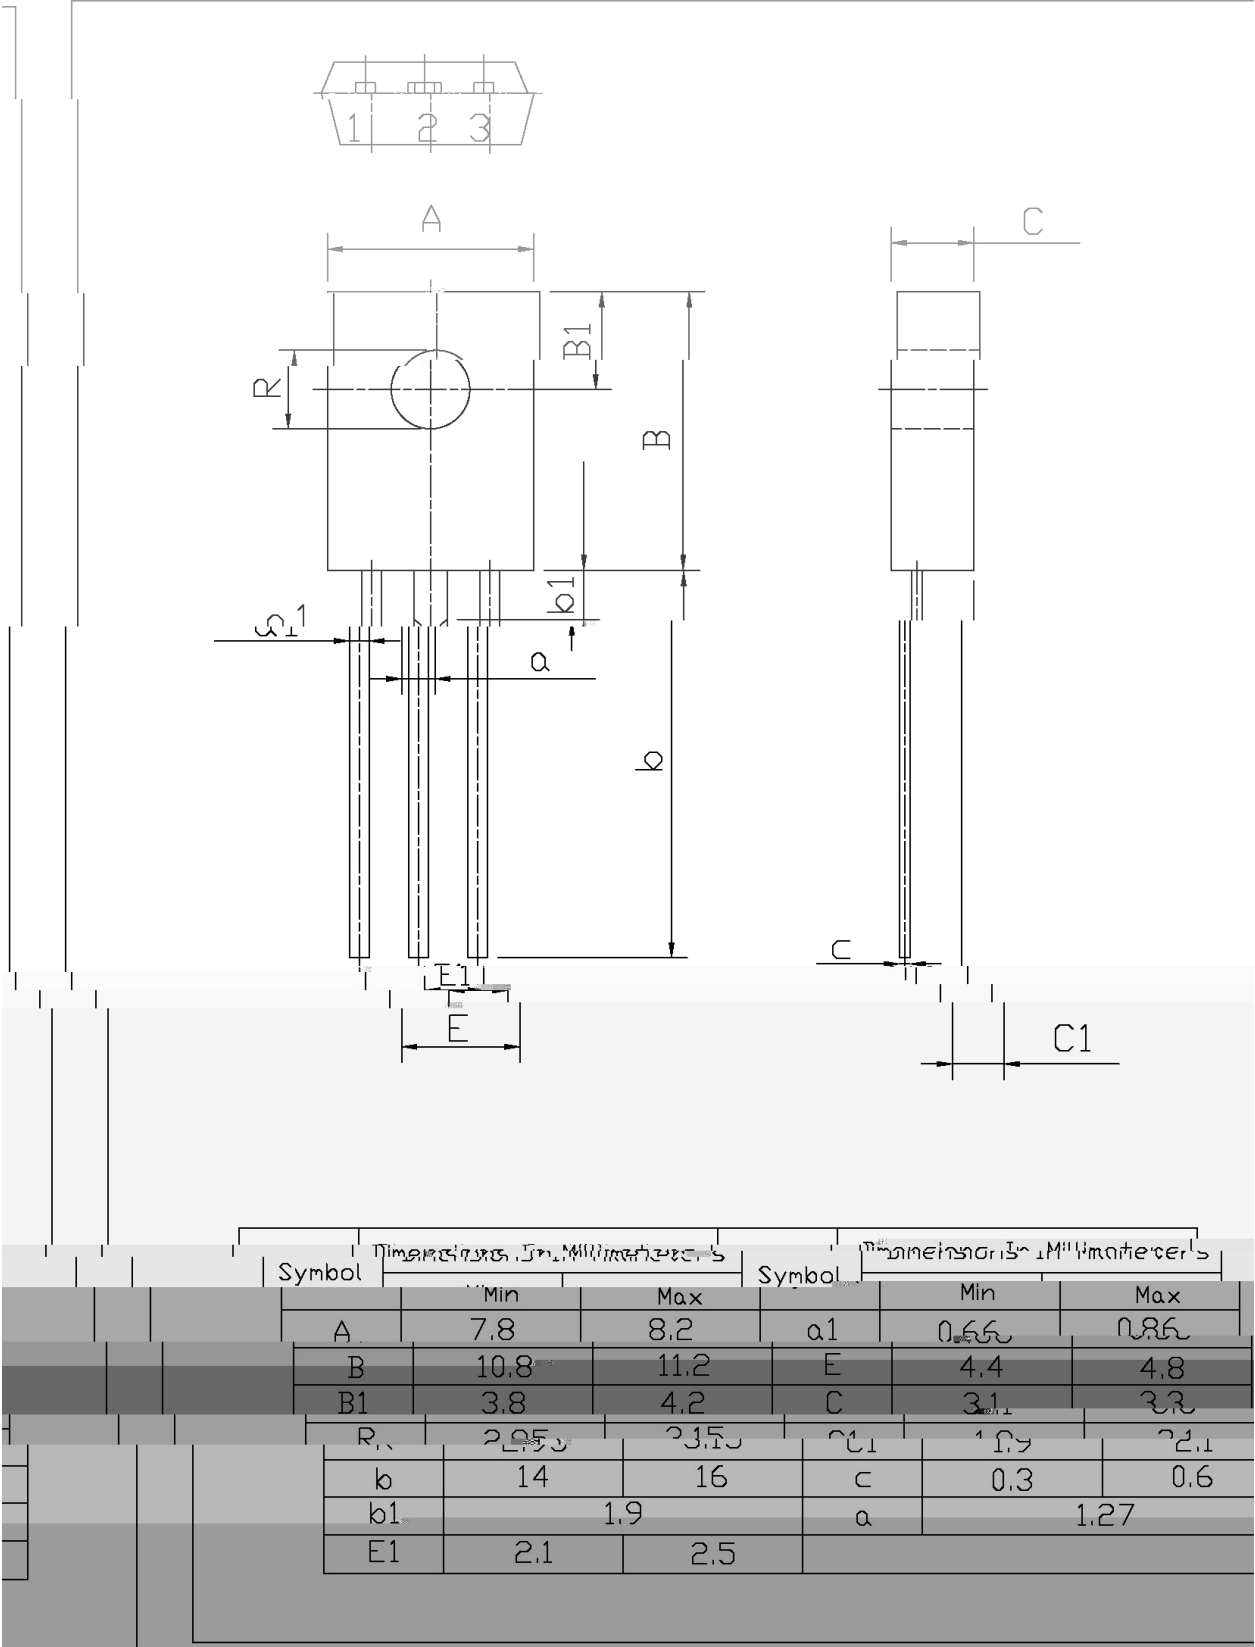

/ Marking Instructions

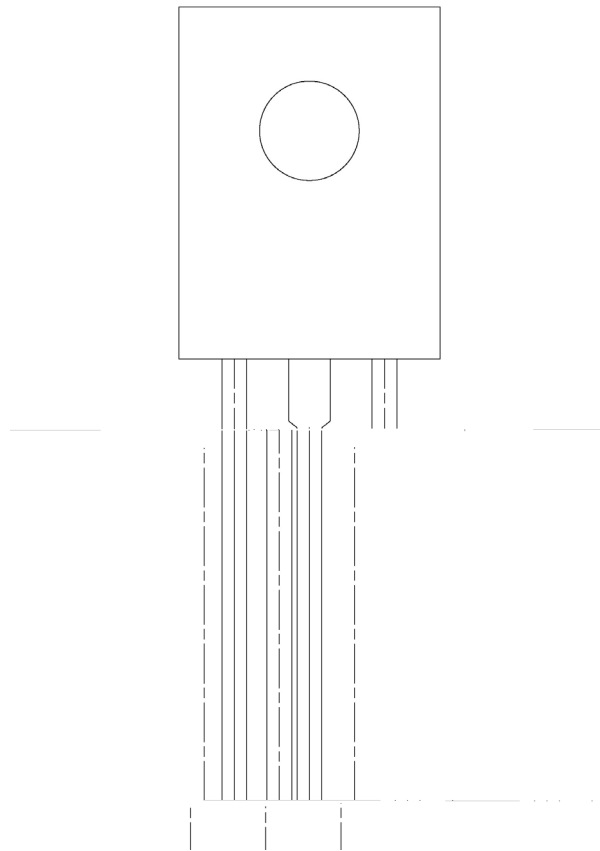

BR

BD434

\*\*\*\*

$\pm$  $\pm$ 

包装尺寸：