

/ Descriptions


/ Features

1, 1, 1, 100


/ Applications

UPS

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
			℃
			℃
	θ		℃
	θ		℃

/ Electrical Characteristics(Ta=25)

		μ				
		℃				μ
		℃				
						Ω
		μ				
		Ω				


/ Electrical Characteristic Curve

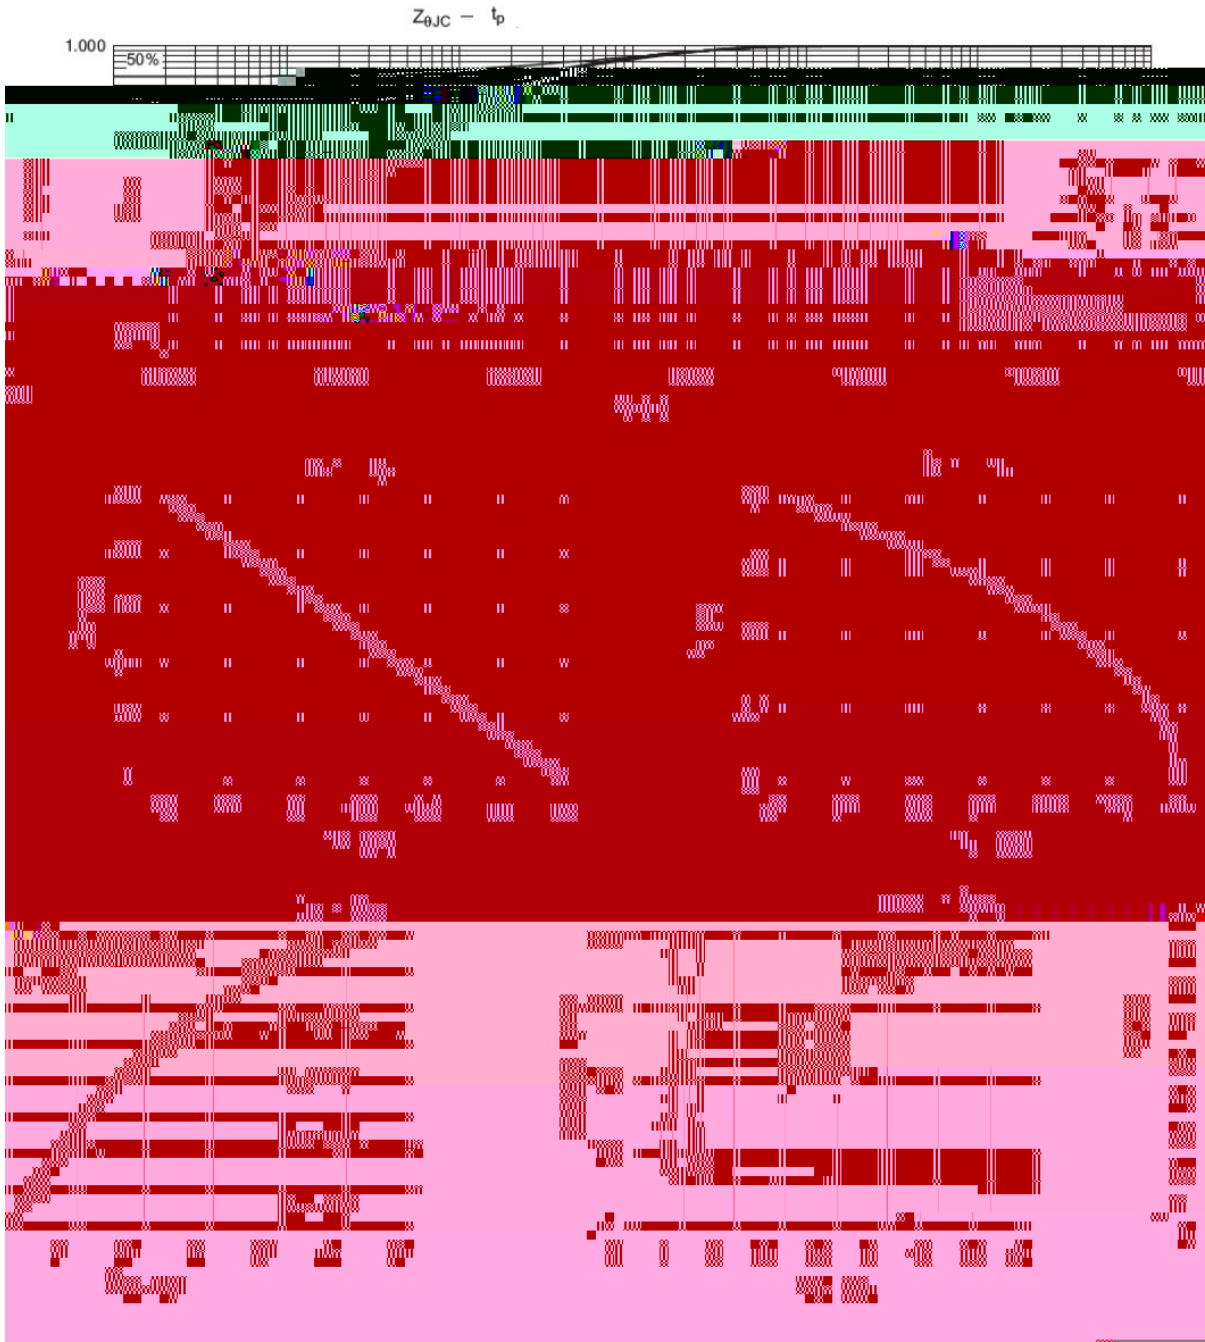

/ Electrical Characteristic Curve




I Electrical Characteristic Curve

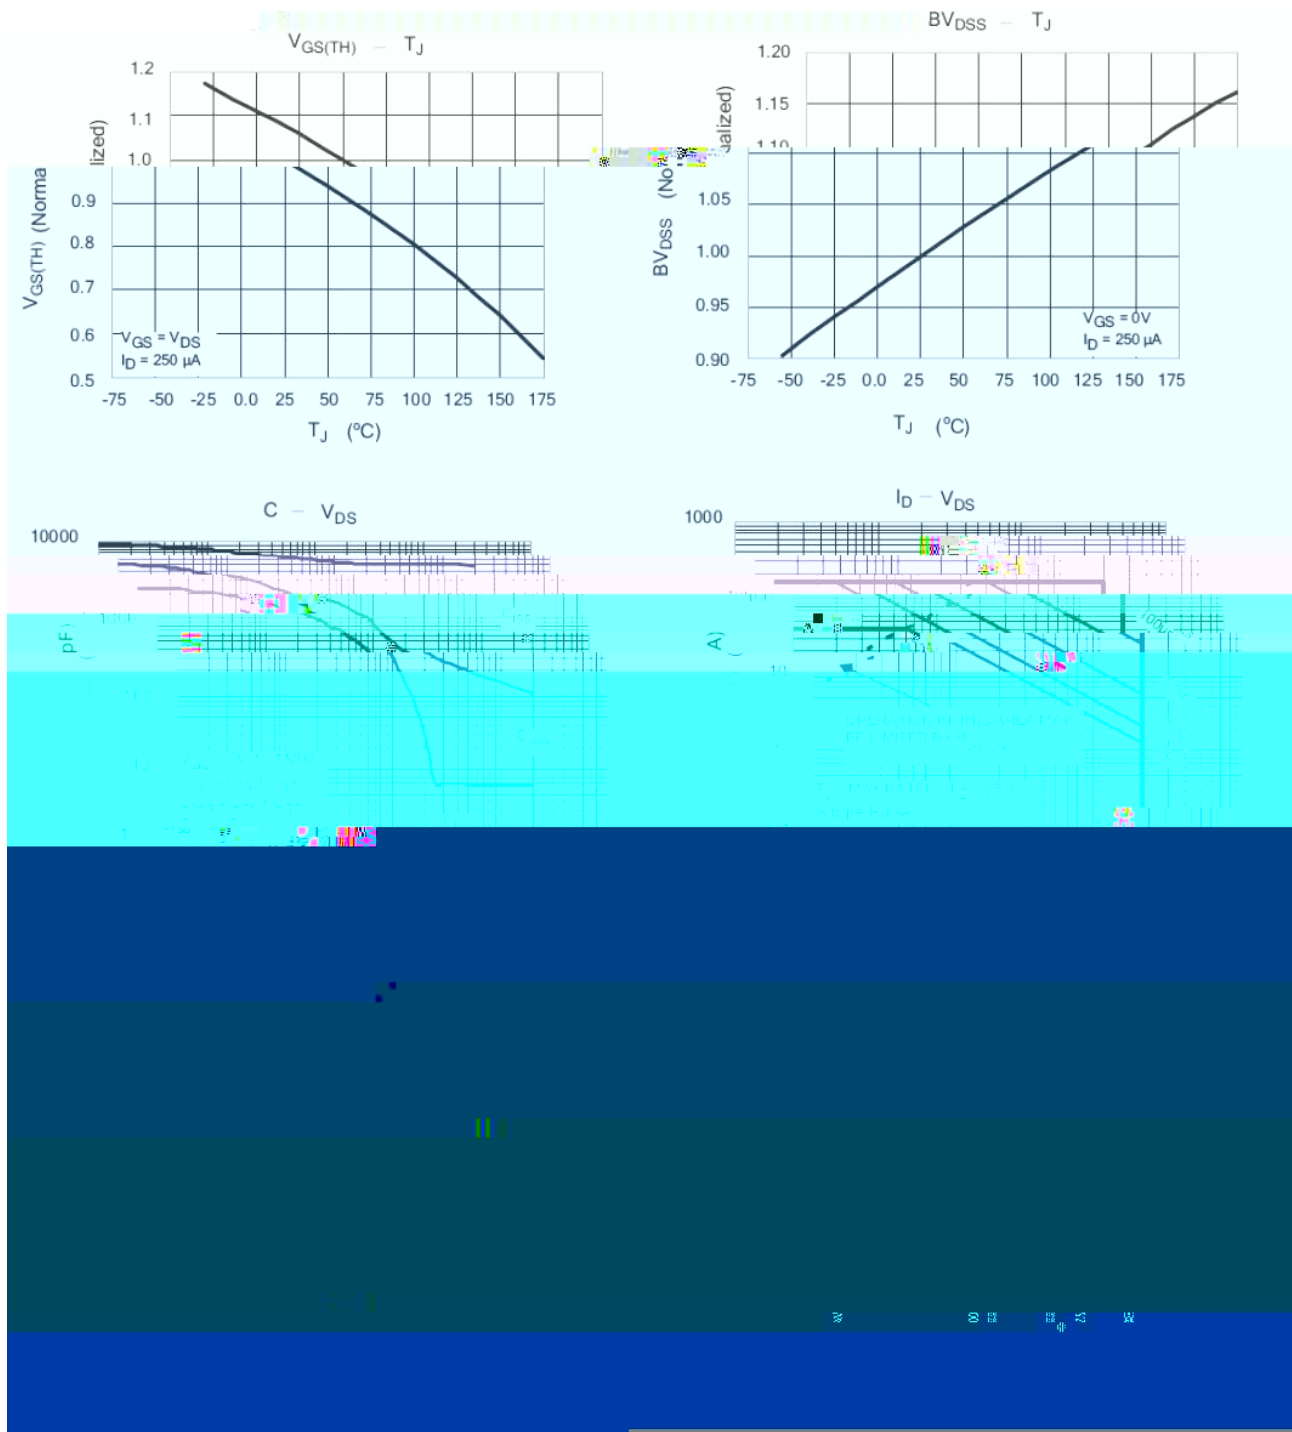


BR40N20

/ Marking Instructions

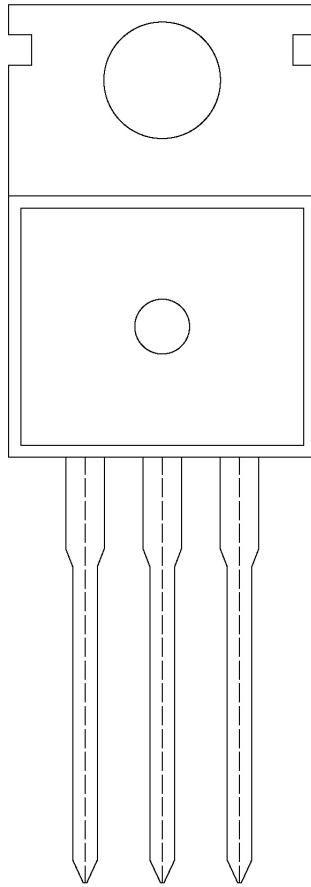

40N20

() / Temperature Profile for Dip Soldering(Pb-Free)

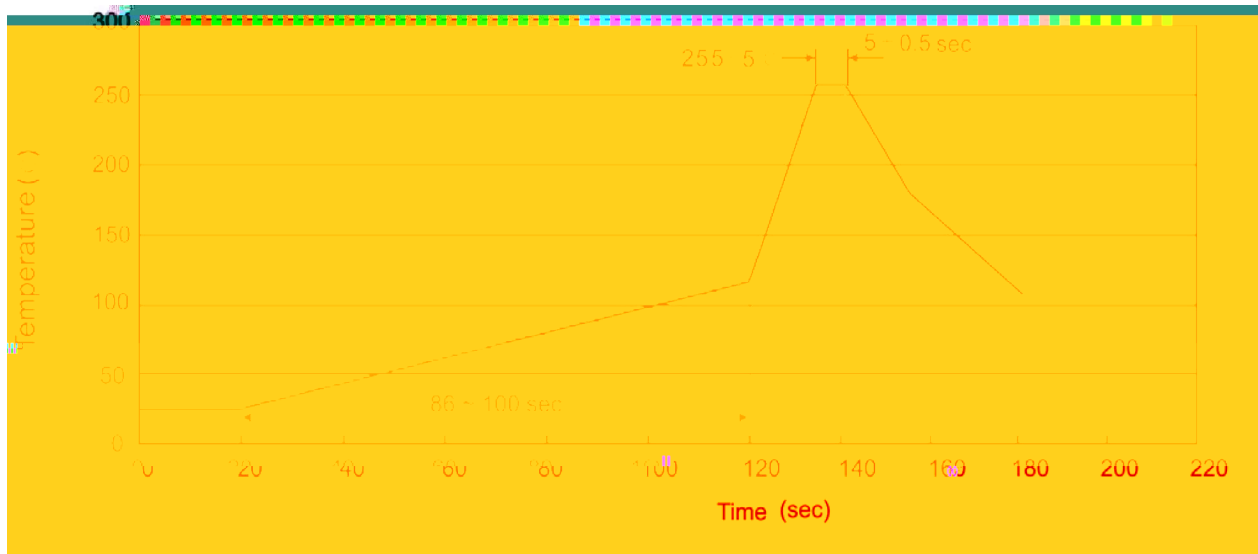 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices