

Precision adjustable shunt regulator in a SOT-23 Plastic Package.

Precise reference voltage to 1.240V, guaranteed 0.5%, 1%, reference voltage Tolerance, sink current capability, 100uA 100mA, quick turn-on, adjustable output voltage, $V_O = V_{ref} - 20V$, low operational cathode current, 55uA typical, 0.05Ω typical output impedance, Qualified to AEC-Q100 Standards for High Reliability, HF Product.


Linear regulators, adjustable power supply, switching power supply, Meet the stringent requirements of automotive applications.

PIN 3 A

Q432



Parameter	Symbol	Rating	Unit
Cathode voltage	V_{KA}	20	V
Continuous cathode current range	I_K	-100 +100	mA
Reference current range	I_{REF}	10	mA
Power Dissipation	P_D	370	mW

/ Electrical Characteristic Curve

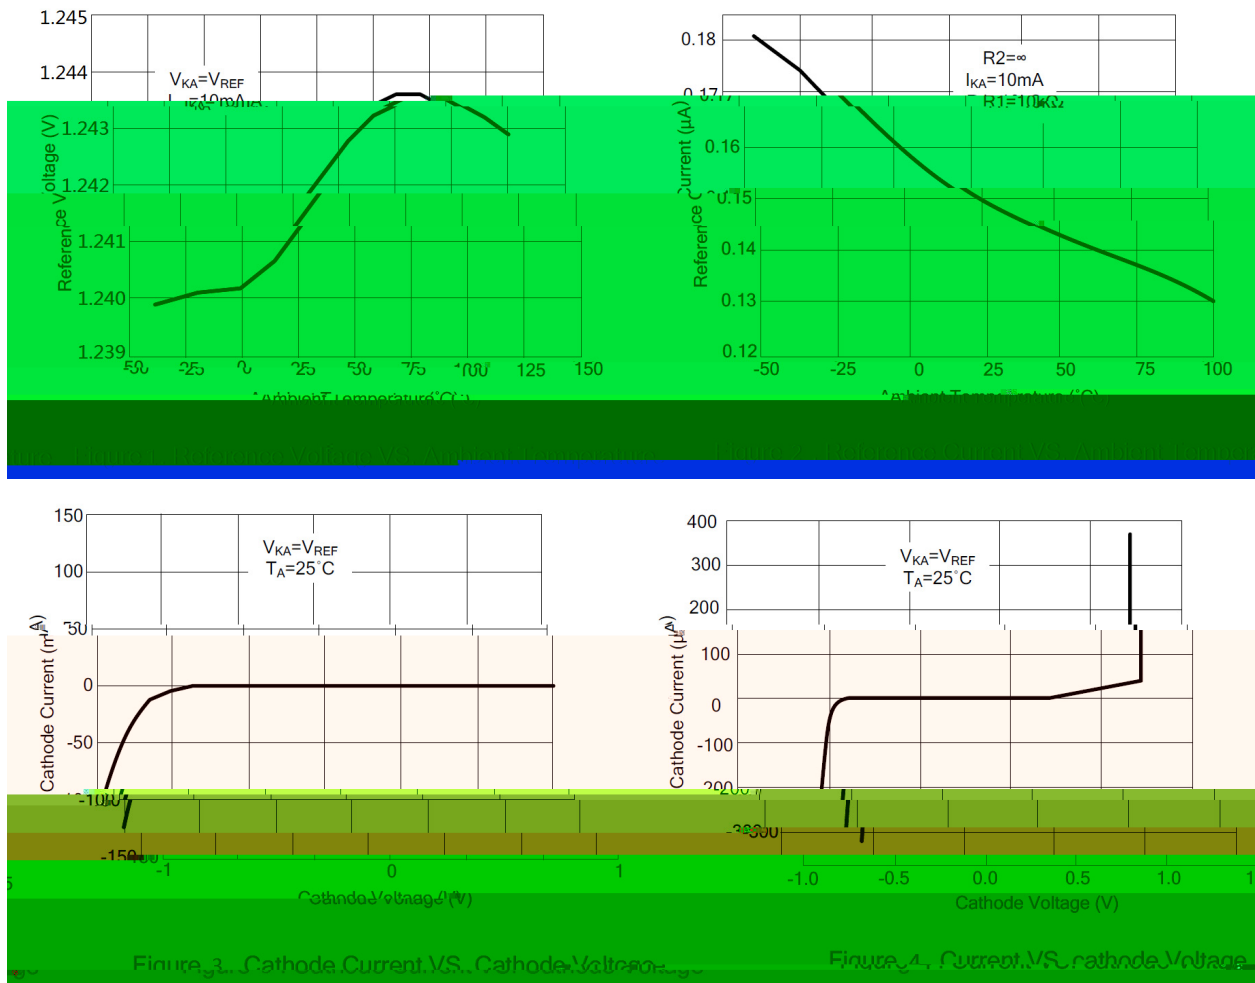


& Test circuits&Typical Application


BLOCK DIAGRAM:

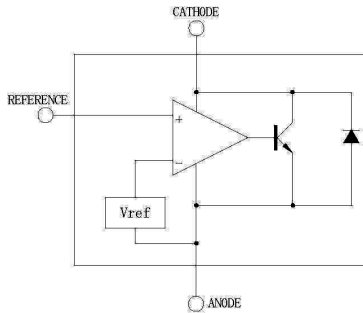


TEST CIRCUITS:

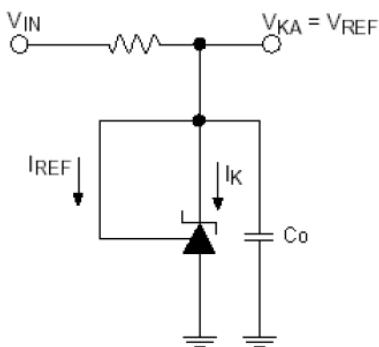

Test Circuit For $V_{KA}=V_{REF}$
 $C_o=0.1\mu F$

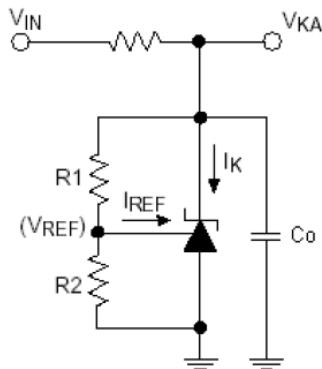


Test Circuit for $V_{KA}\geq V_{REF}$
 $C_o=0.1\mu F$



Test Circuit For $I_{K(OFF)}$


TYPICAL APPLICATIONS:

Shutdown Regulator

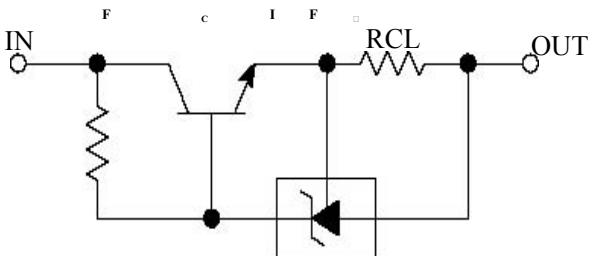

Constant Current Source

Higher-current Shunt

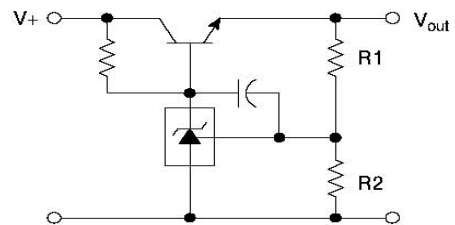

$$V_{out} = \left(1 + \frac{R1}{R2}\right) V_{ref}$$


$$V_{out, min} = V_{ref} + V_{hfe}$$

Series Pass Regulator

/ Package Dimensions

SOT-23

单位：mm

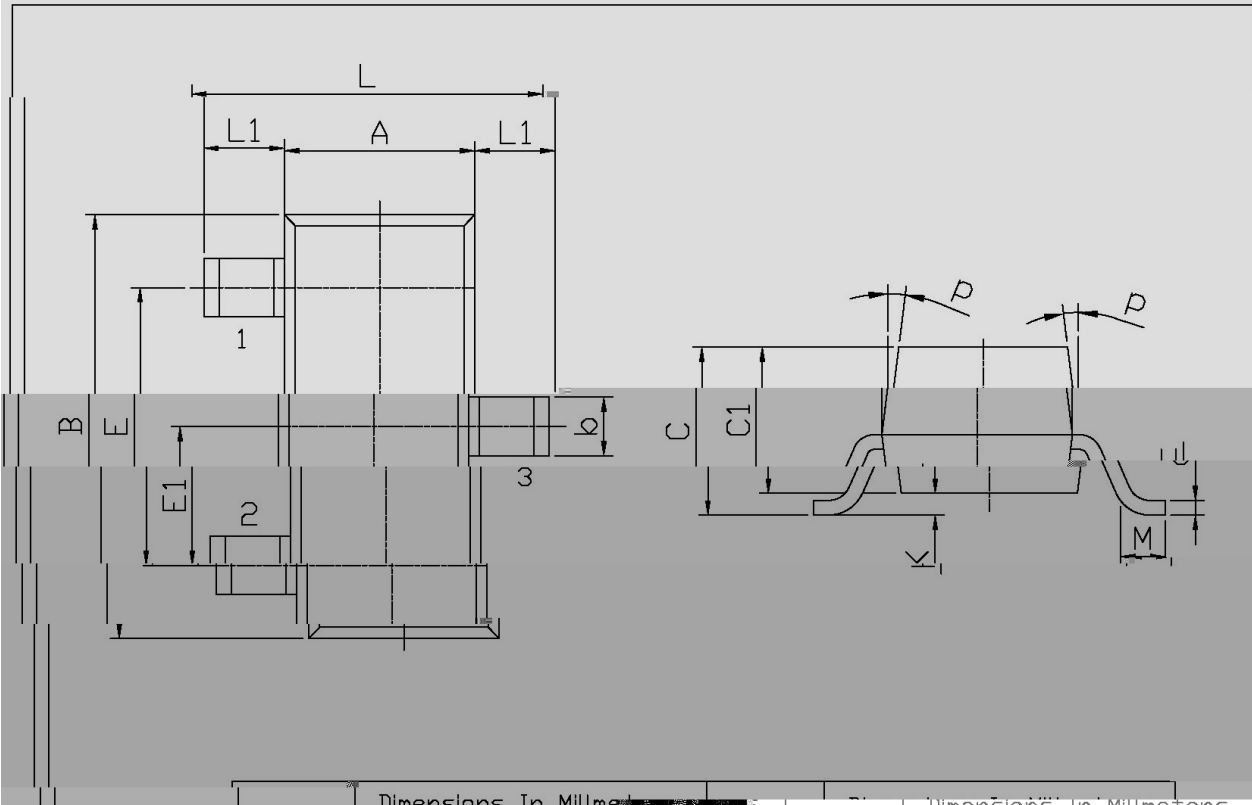

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20Min	
E1	0.85	1.05	P	7°	
b	0.35	0.55			

/ Marking Instructions



Q


432

Note:

Q: Automobile halogen-free product Code

432: Product Type

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

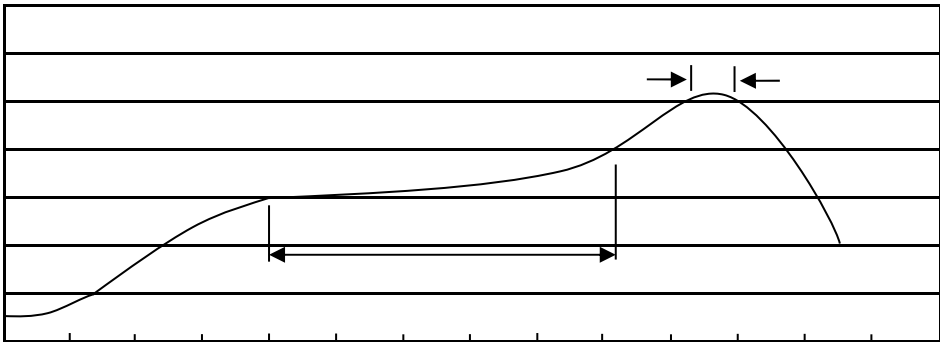

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3

2 10

/sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices