


/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

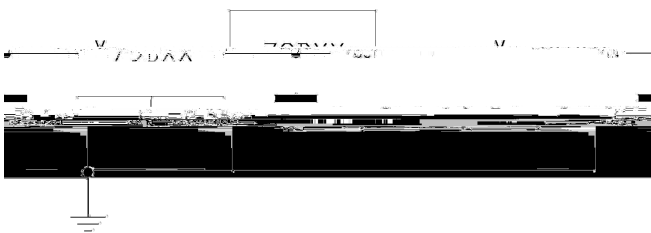

/ Pinning

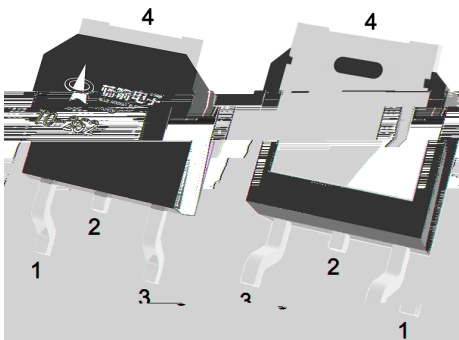

/ Marking



/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		


/ Electrical Characteristics(Ta=25)

		≤				
						μ

/ Electrical Characteristic Curve

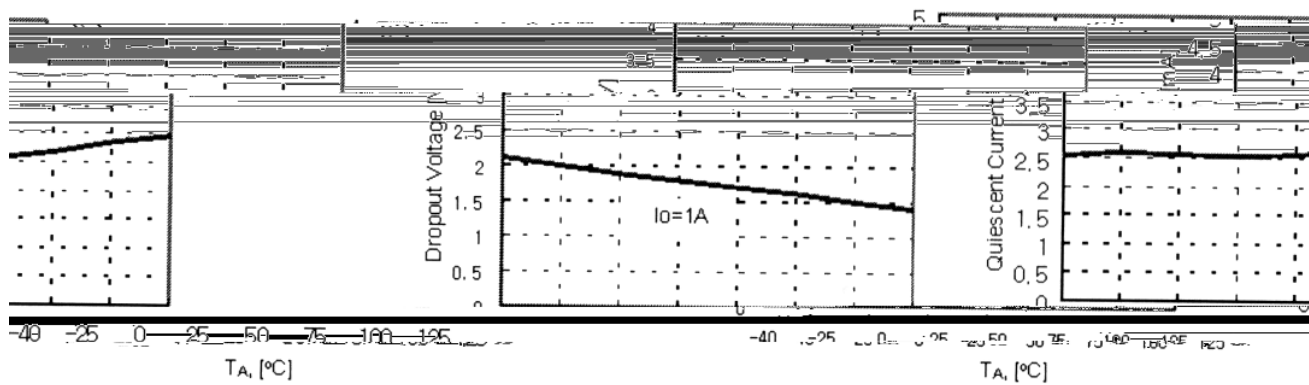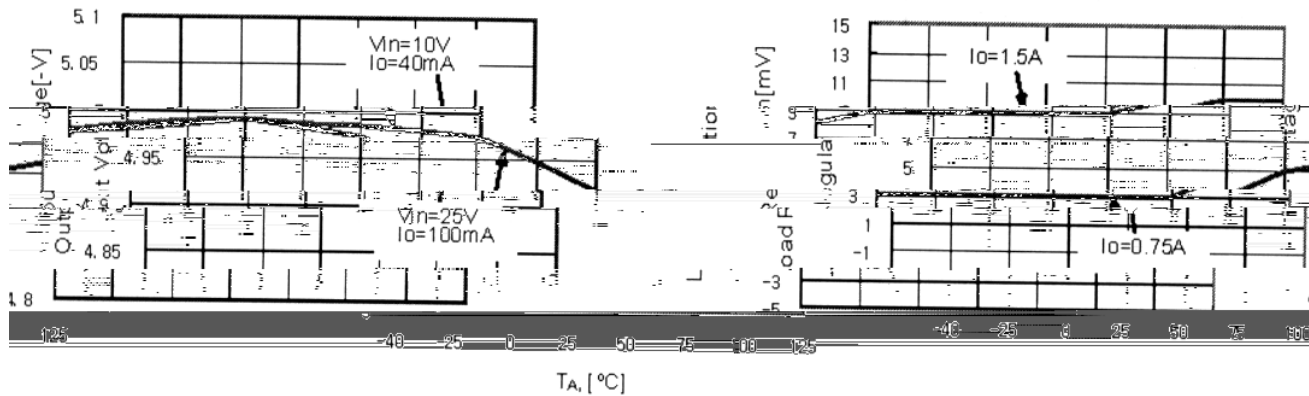


/ Package Dimensions

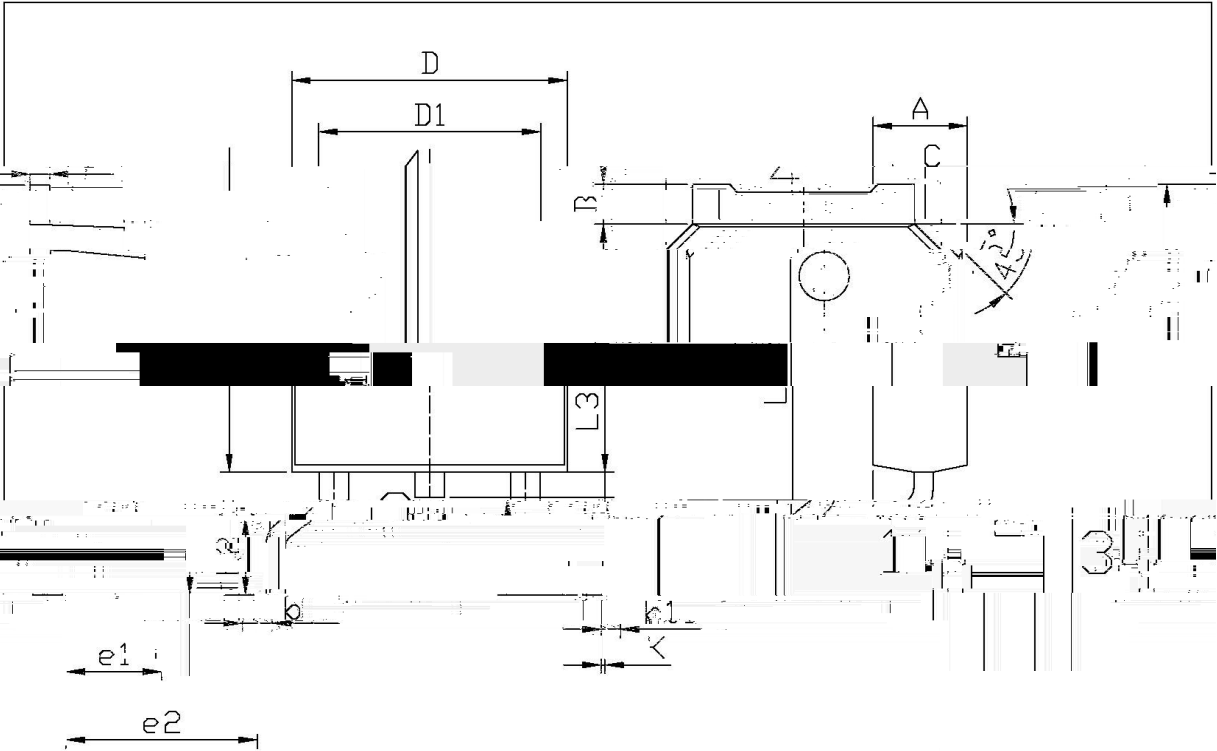

单位: mm					
Symbol		Dimensions In Millimeters		Symbol	
		Min.	Max.		
A	6.25	6.20	6.40	B	0.95
B	2.34	1.25	2.40	e1	2.00
C	1.73	1.70	1.76	e2	4.20
D	9.85	10.35	10.40	b	0.45
L3	0.55	0.52	0.58	b1	0.55
D1	6.45	6.75	6.80	K	0.12
	6.00	6.10	6.50		


/ Marking Instructions

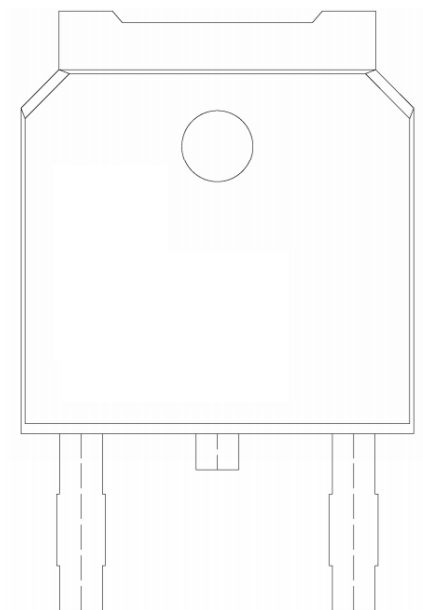

BR

79D05

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

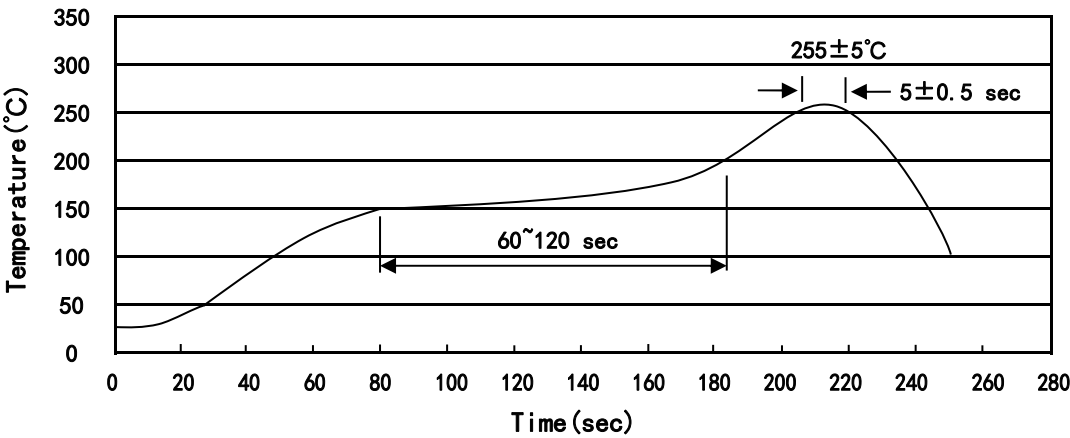

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices