


/ Descriptions

TO-252


/ Features

/ Applications

/ Equivalent Circuit

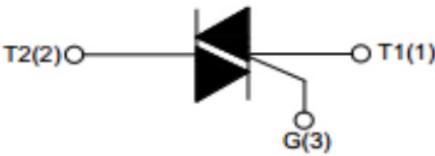

/ Pinning

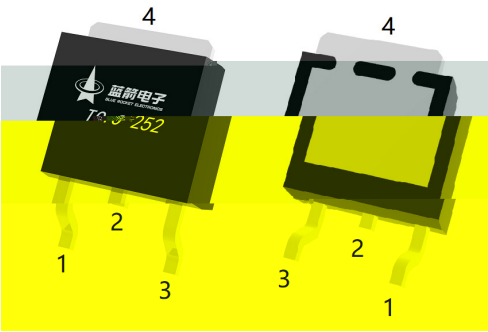

:

/ Marking

/ Absolute Maximum Ratings(Ta=25)


		~	℃
		~	℃
			℃

/ Electrical Characteristics(Tj=25)

4 / Snubberless and logic level 4 quadrants)

	℃			
		℃		
		℃		
		℃		
		℃		

/ Electrical Characteristic Curve

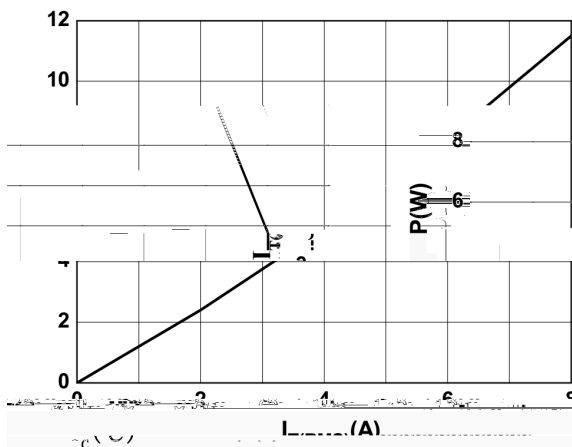

S on-state current versus case temperature

FIG.1 Maximum power dissipation versus RMS on-state current

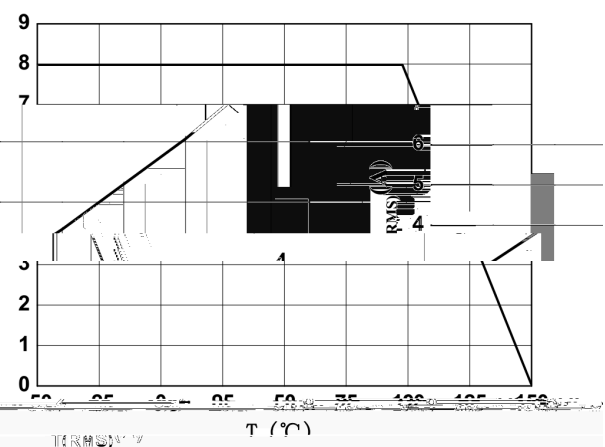


FIG.2: RM

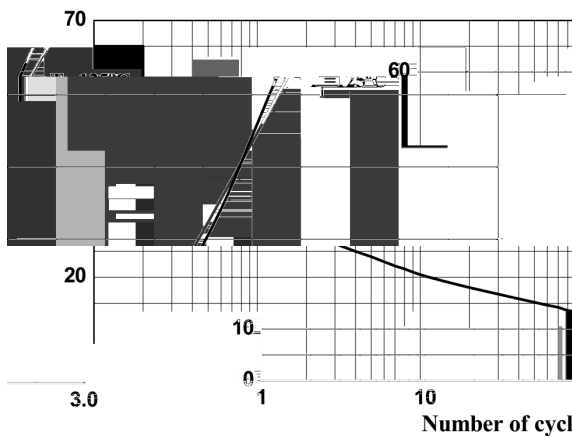


FIG.3: Surge peak on-state current versus number of cycles

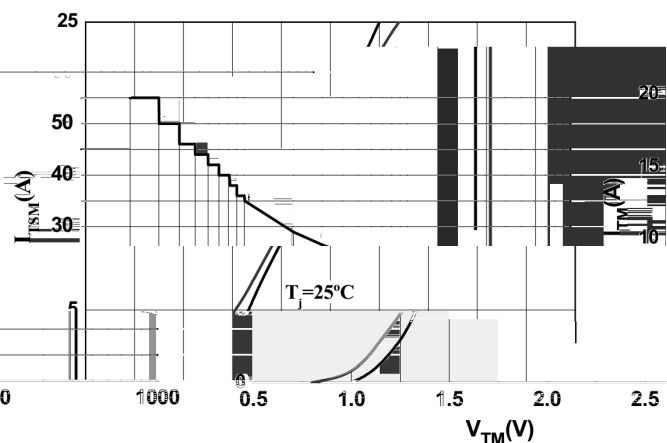


FIG.4: On-state characteristics


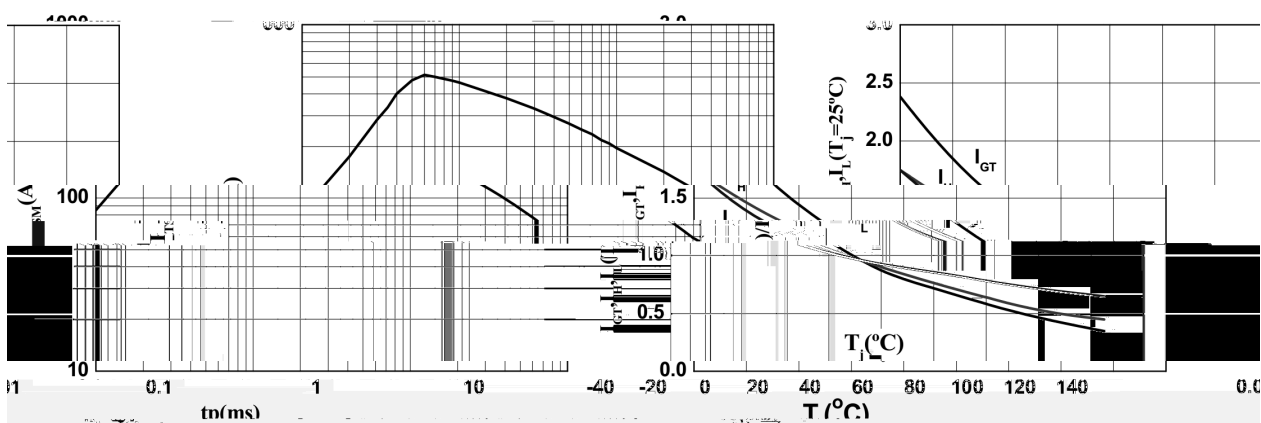


FIG.5: Non-repetitive surge peak on-state current

FIG.6:

/ Package Dimensions

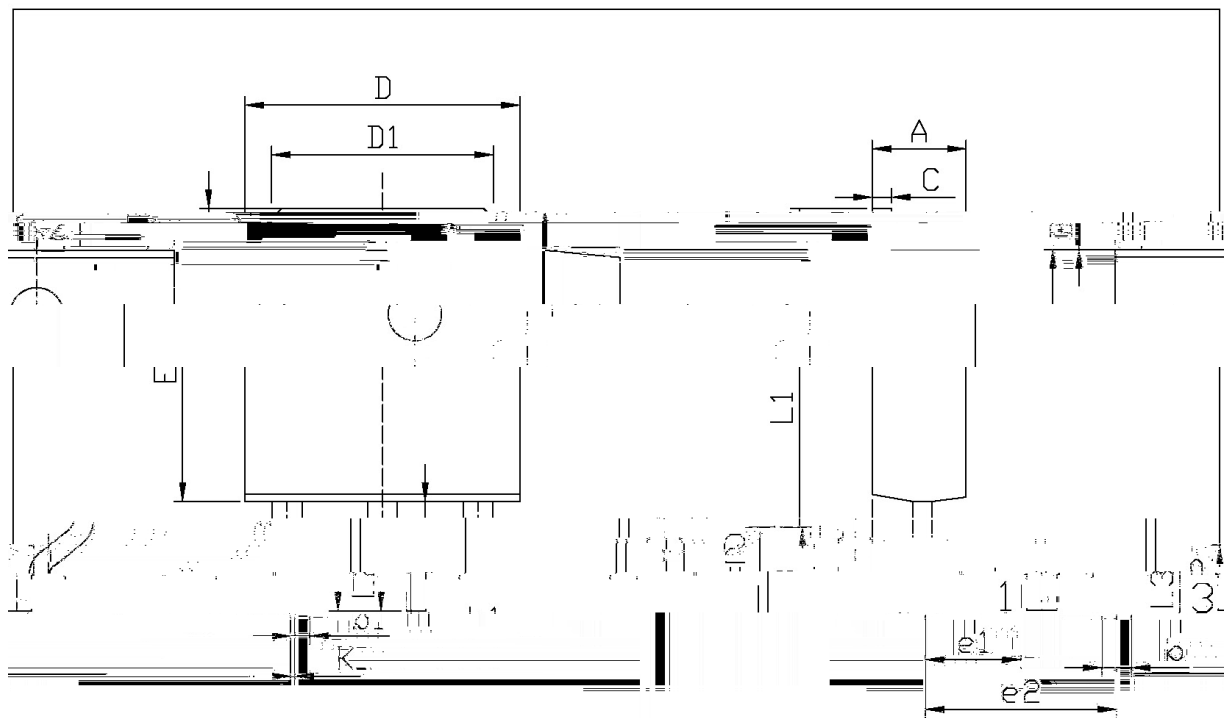

单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	2.20	2.40	E	5.95	6.25
B	0.95	1.25	e1	2.24	2.34
b	0.50	0.90	e2	4.43	4.73
b1	0.45	0.55	L1	9.45	9.95
C	0.45	0.55	L2	1.25	1.75
D	6.45	6.75	L3	0.60	0.90
D1	5.10	5.50	K	0.00	0.10

T0-252


/ Marking Instructions

BR

BT0808

E

I_{GT}

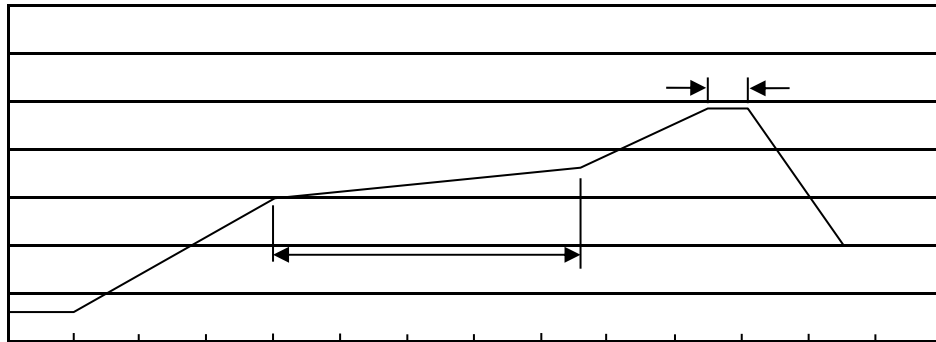 $\pm$

°C

						"		

6 6