


/ Features

XVE

/ Pinning

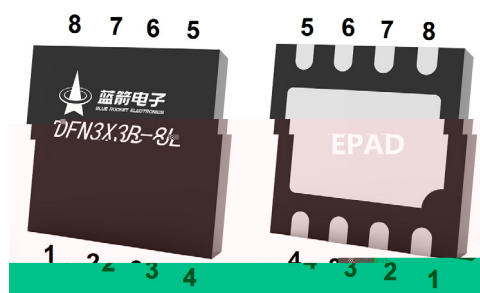

PIN Num.	Symbol	Function
	SUR J	
		8Y

/ Absolute Maximum Ratings(Ta=25)


PARAMETER	SYMBOL	RATINGS	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Power Suplly						
						μ
						μ
						μ
Charging Current Setting						

/ Electrical Characteristics(Ta=25)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Indicator Pin Status CHRG/STDBY						
Internal Temperature Compensation						
		WHPS QWF				
		WHPS QWF				

/ Principle block diagram

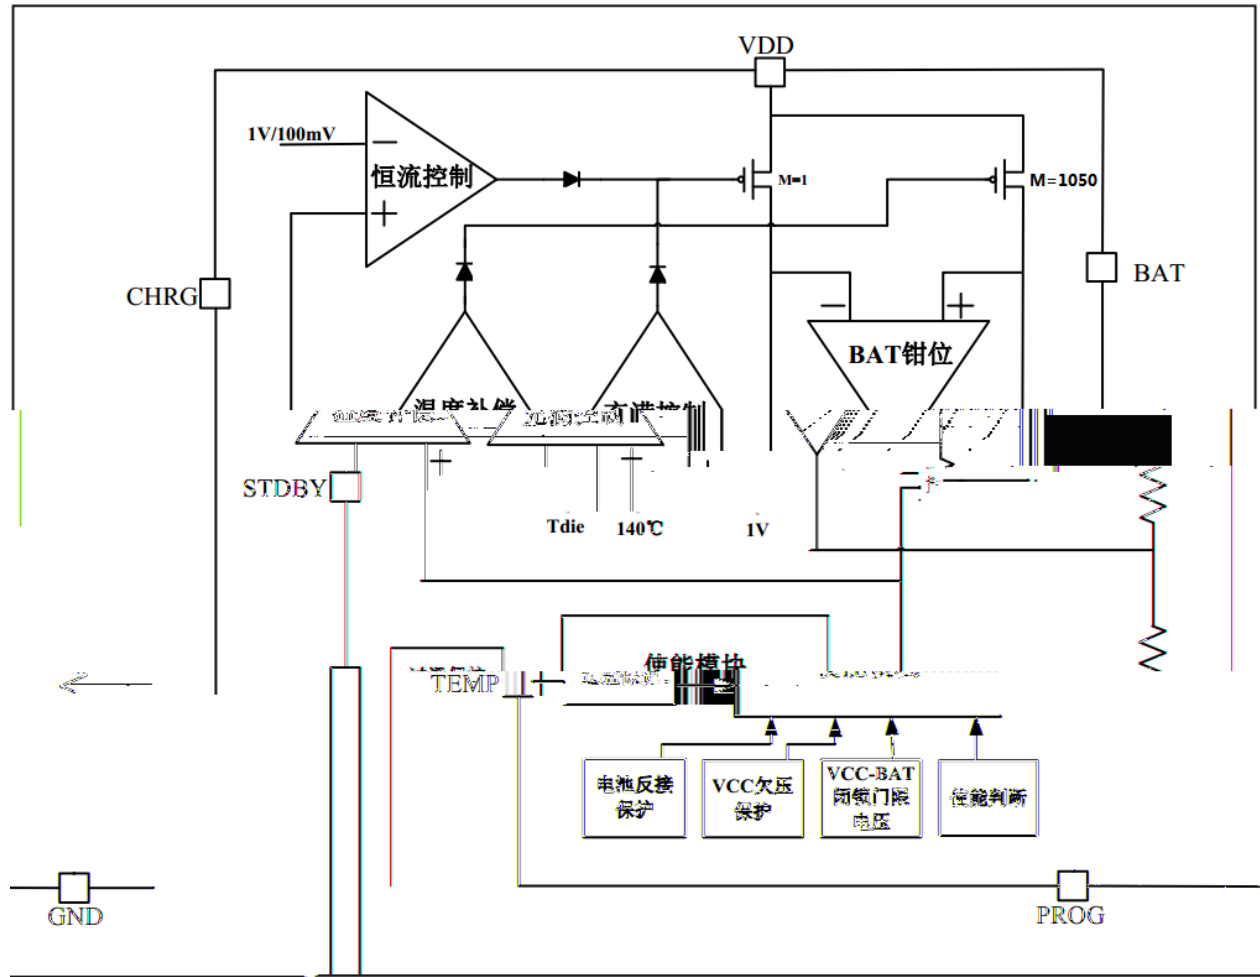

/ Function description


Ω

Ω	


/ Function description

+WHPS ,		
YGG		

/ Package Dimensions

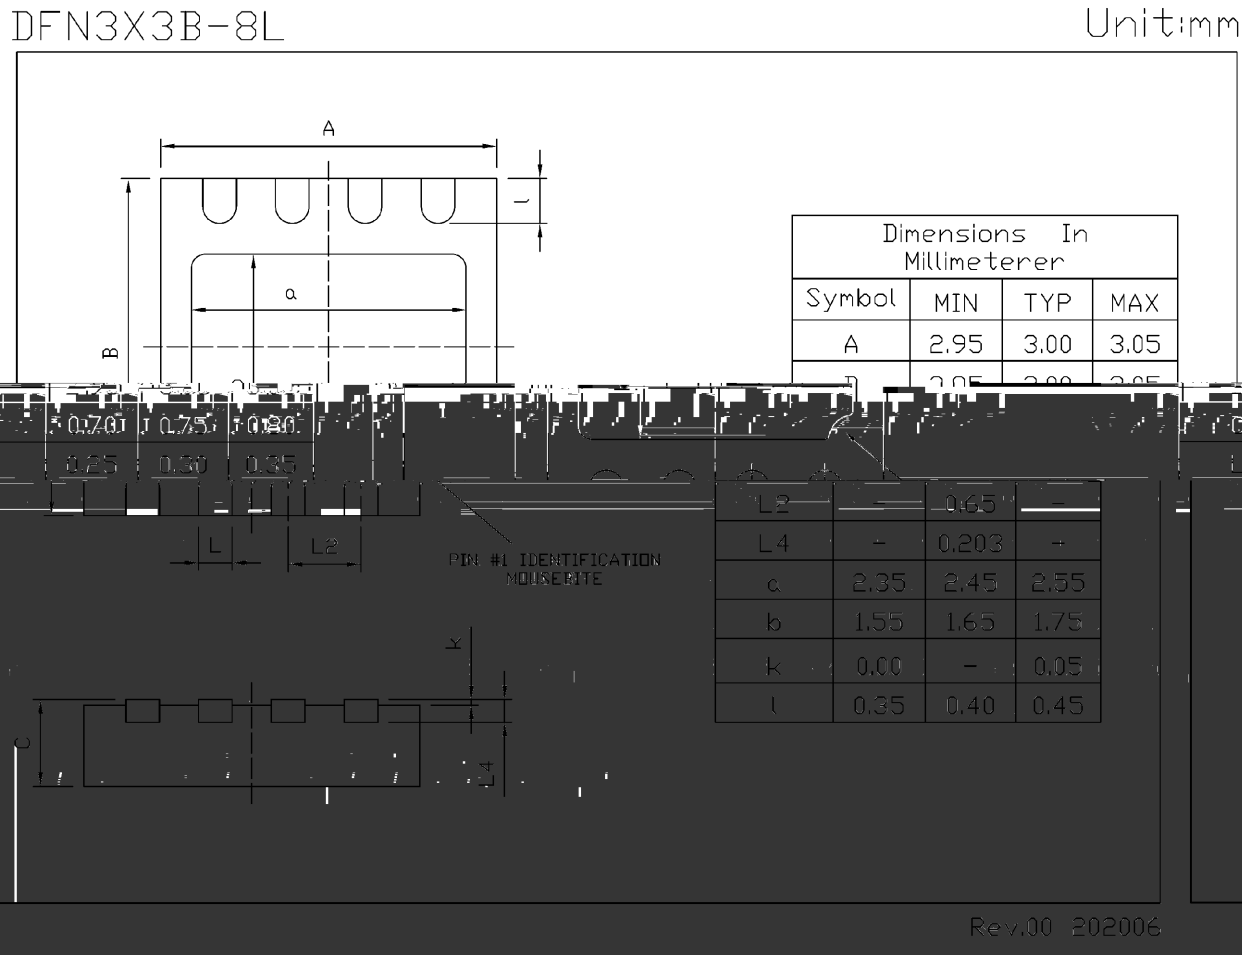


/ Marking Instructions

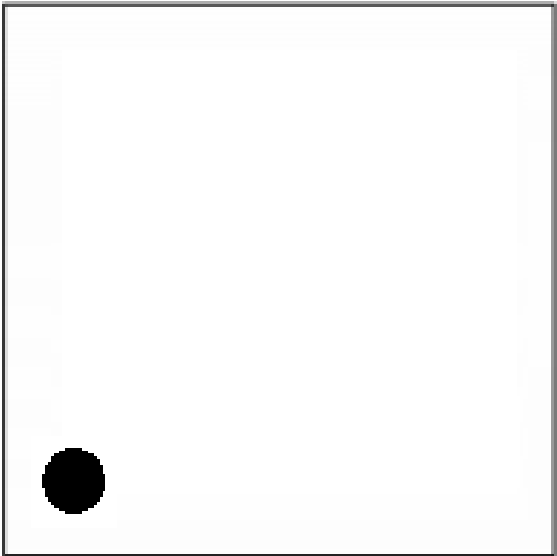

EU
7373
XX

() /

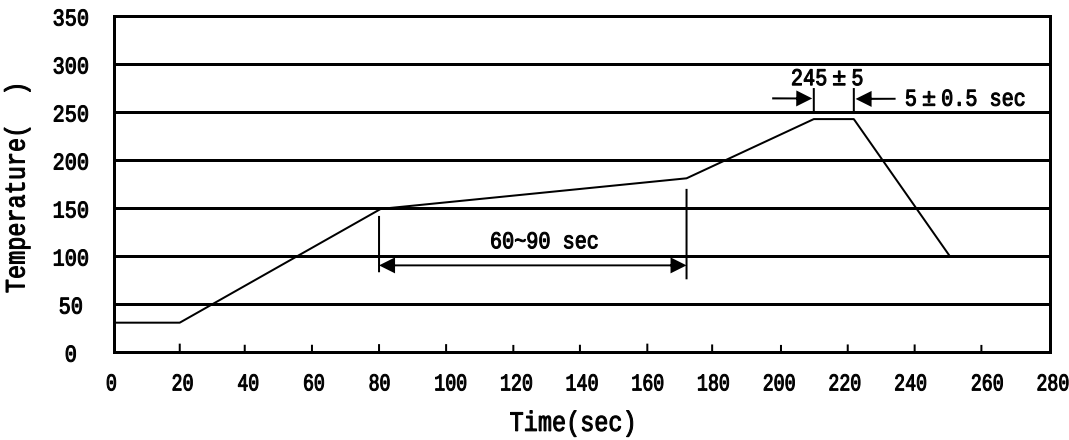

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices