




Low dropout linear regulator in a SOT23-3 Plastic Package .

Low power consumption,Low voltage drop,Small temperature drift coefficient,High input voltage up to 30V,The static current 2.5 A,The output voltage accuracy .HF Product.

For use in power equipment,Communication equipment,Audio and video equipment.

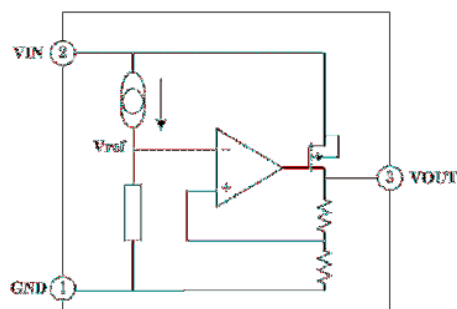

1	GND		3	VIN	
2	VOUT				

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Working Voltage	V_{IN}	-0.3~33	V
Thermal Resistance	$R_{\theta JA}$	250	/W
Power Consumption	P_D	400	mW
Storage Temperature	T_{STG}	-50~+125	
Working Temperature	T_A	-40~+85	

Notes: If the device operating conditions over the maximum rating of the above-mentioned conditions, may cause permanent damage to the device. The above parameters is only part of the operating conditions the maximum, we do not recommend the device running outside the scope of this specification. If the device to work long hours under the condition of absolute maximum limit, its stability may be affected.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
The Output Voltage	V_{OUT}	$V_{IN}=5.3V, I_{OUT}=10mA$	3.234	3.30	3.366	V
The Output Current	I_{OUT}	$V_{IN}=5.3V$	100	150		mA
Load Regulation	ΔV_{OUT}	$V_{IN}=5.3V$ $1mA \leq I_{OUT} \leq 150mA$		25	60	mV
Low Dropout	V_{DIF}	$I_{OUT}=1mA, \Delta V_{OUT}=2\%$		25	55	mV
Static Power	I_{SS}	$V_{IN}=5.3V$		2.5	4.0	μA
Linear Regulation	$\frac{\Delta V_{OUT}}{V_{OUT}} \cdot \frac{\Delta V_{IN}}{V_{IN}}$	$5.3 \leq V_{IN} \leq 30V$ $I_{OUT}=10mA$			0.2	%/V
The Input Voltage	V_{IN}				30	V
Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T_A} \cdot V_{OUT}$	$V_{IN}=7.0V, I_{OUT}=10mA$ $-40^\circ C \leq T_A \leq 85^\circ C$		100		ppm/ $^\circ C$


 $V_{IN}=5.3V$

2%

 V_{DIF}


Note: V_{DIF} is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at $V_{IN}=5.3V$ with a fixed load.

/ The input voltage and output voltage

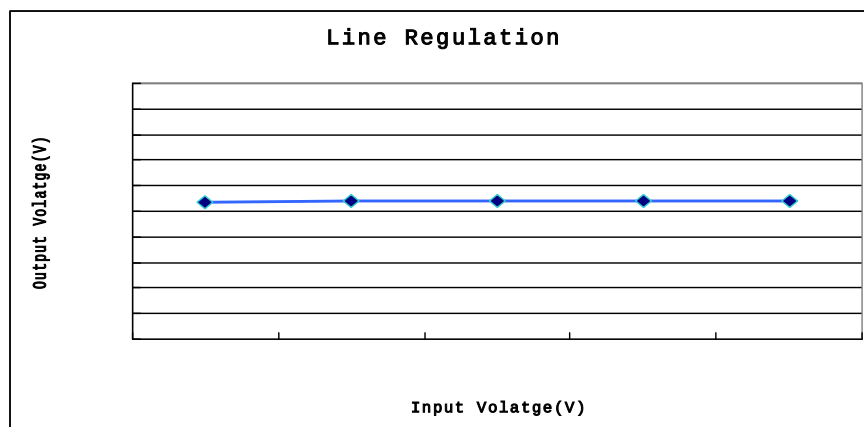


$I_{OUT}=10mA$

/ The output voltage and load current

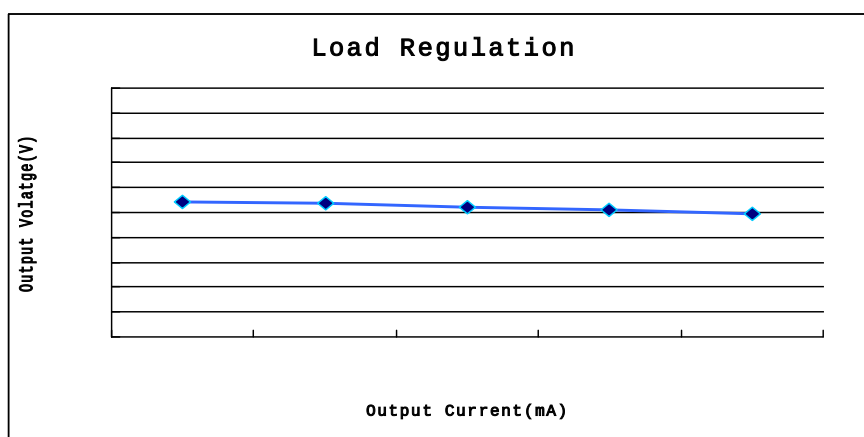


$V_{IN}=5.3V$

/ The output voltage and temperature

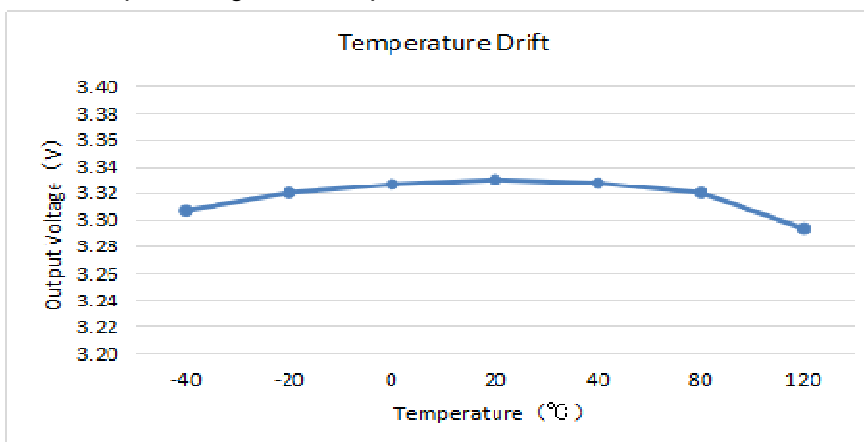


$I_{OUT}=10mA$


/ Basic Application

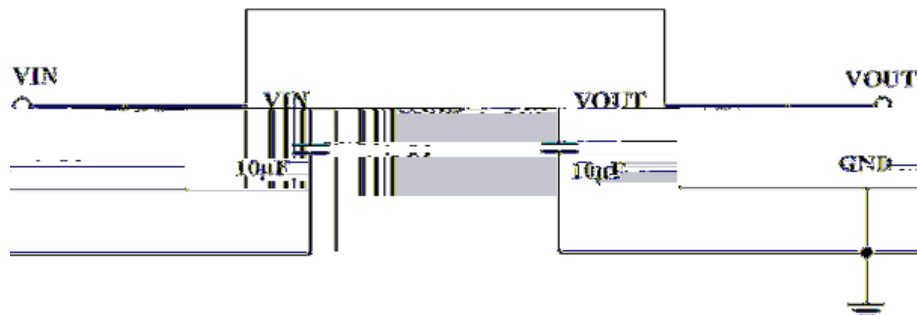


/ High Output Current Voltage Regulator

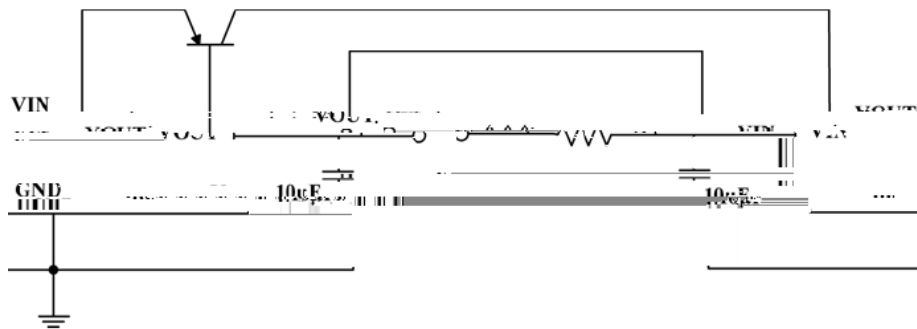


/ Short-Circuit Protection

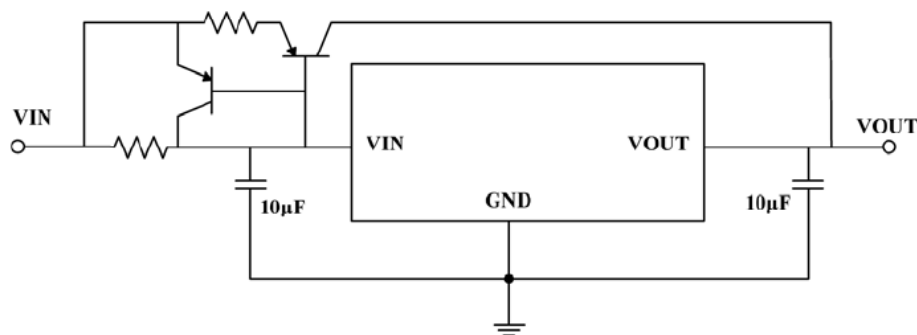


/ Circuit for Increasing Output Voltage

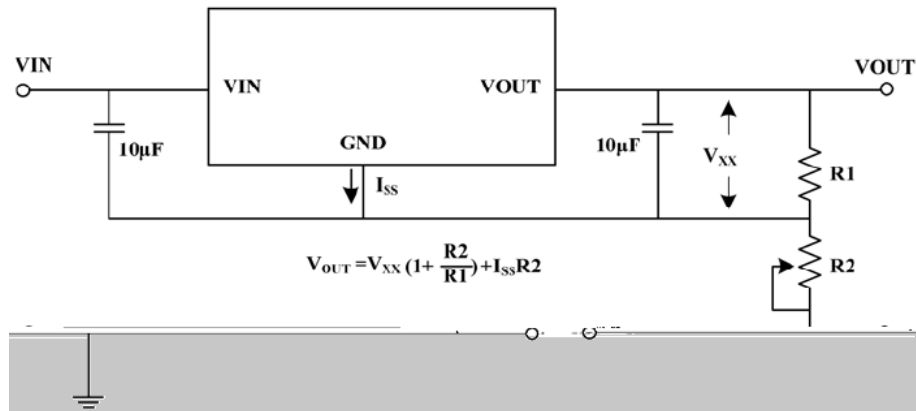


/ Constant Current Regulator

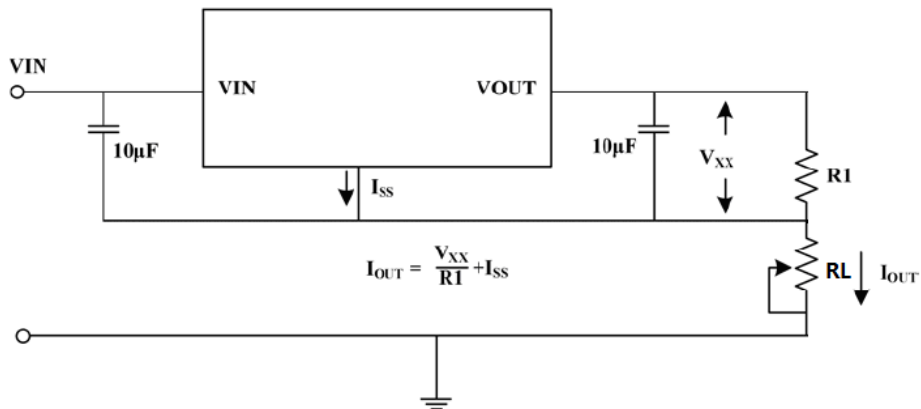


/ Double Output Circuit

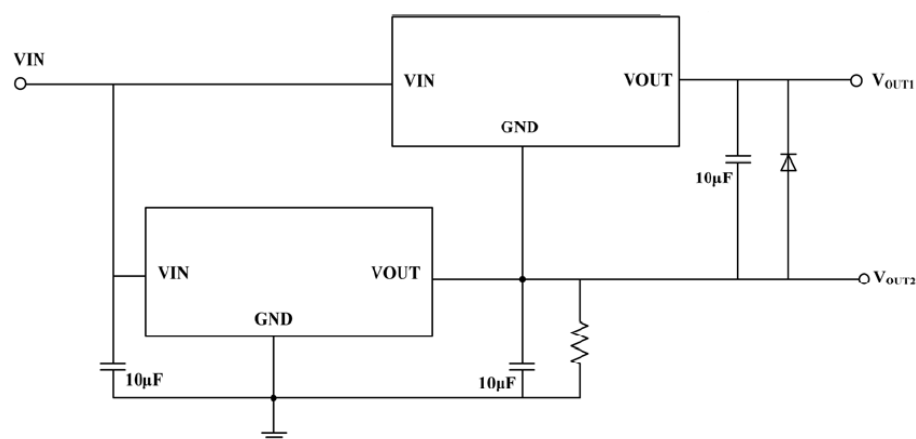

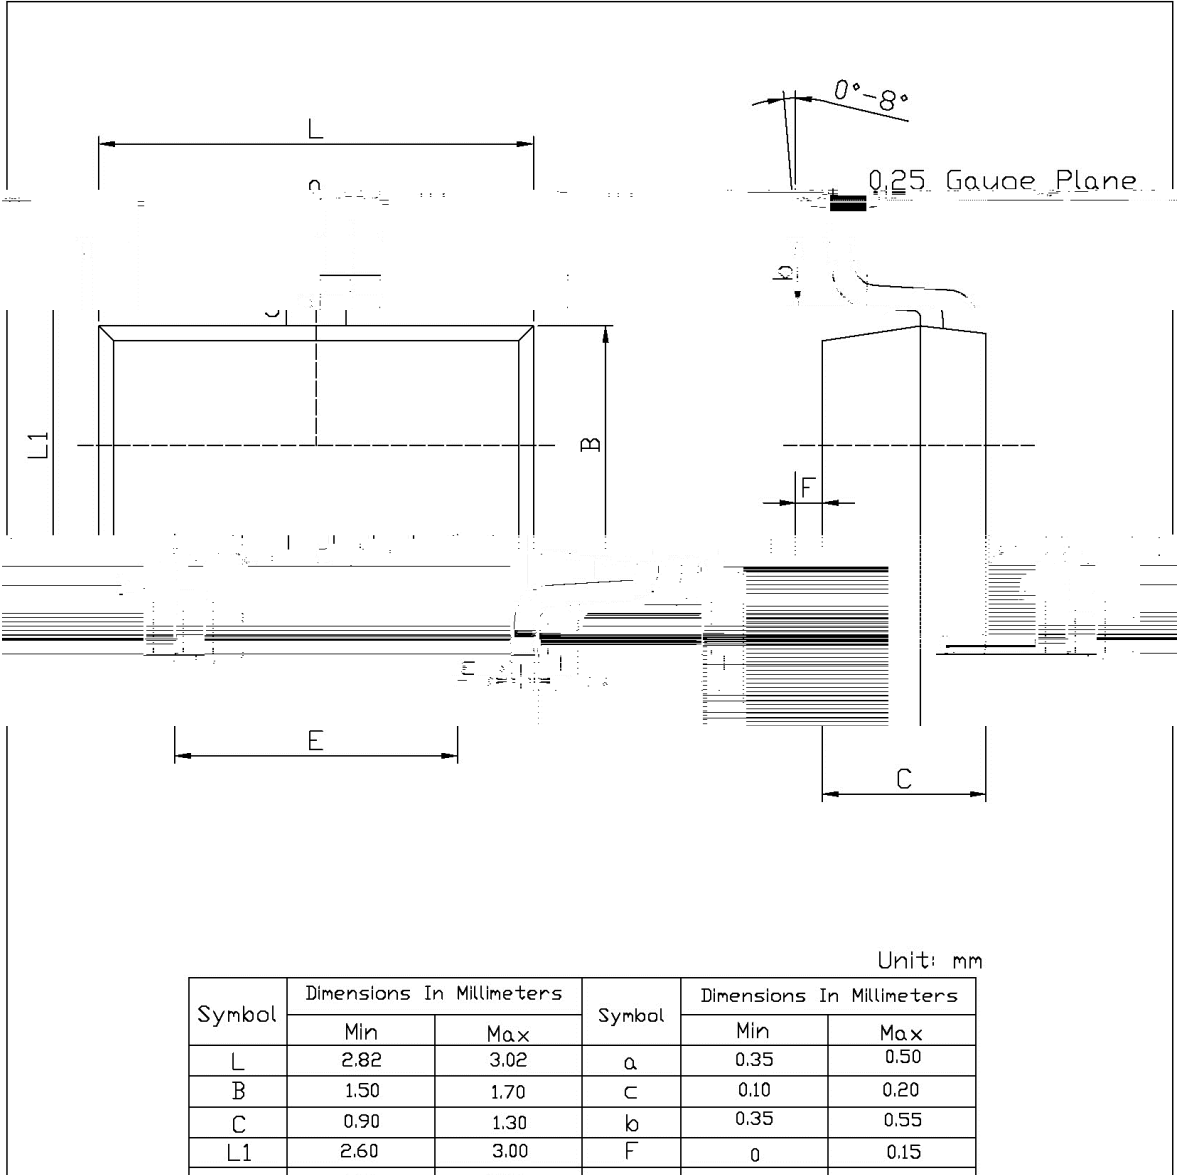

T23-3

S□

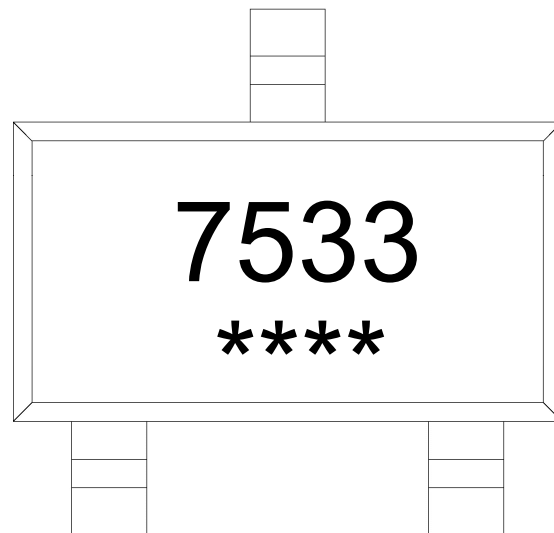

7533

Note:

7533: Product Type.

****: Lot No. Code, code change with Lot No.

Rev.B Apr.-2021

