

BRCO7533TAQ




/ Absolute Maximum Ratings(Ta=25)

	θ		




/ Electrical Characteristics(Ta=25)

		$\leq \leq$				
						μ
		$\leq \leq$				
		$\leq \leq$				




/ Electrical Characteristic Curve

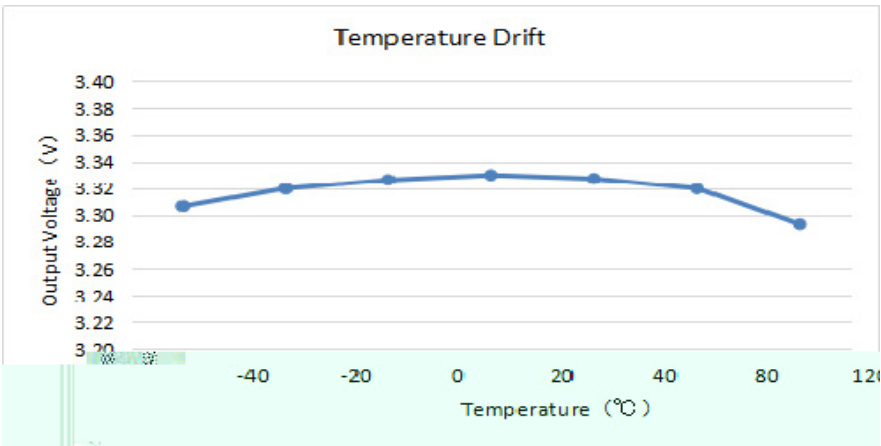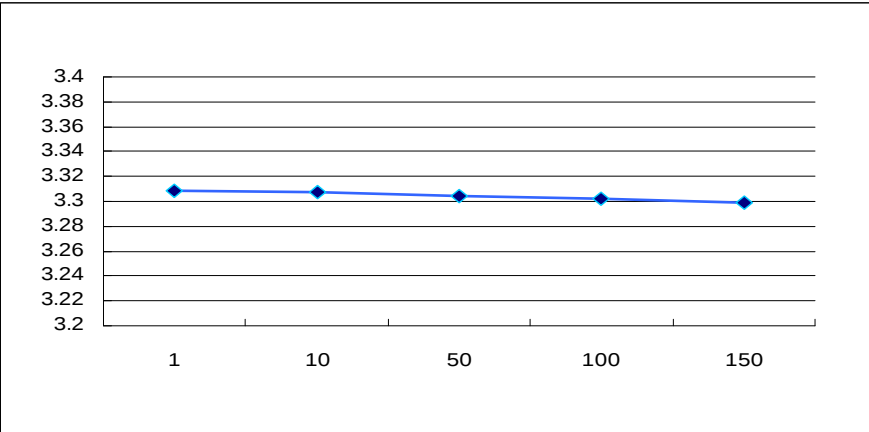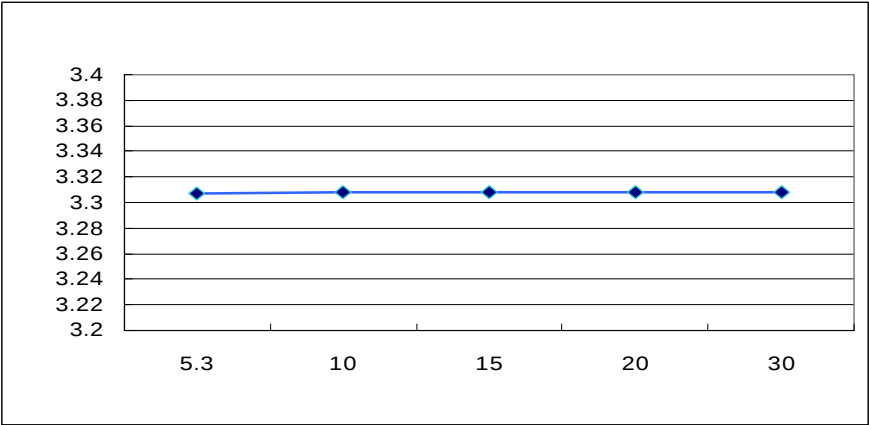

/ Typical Application Circuit

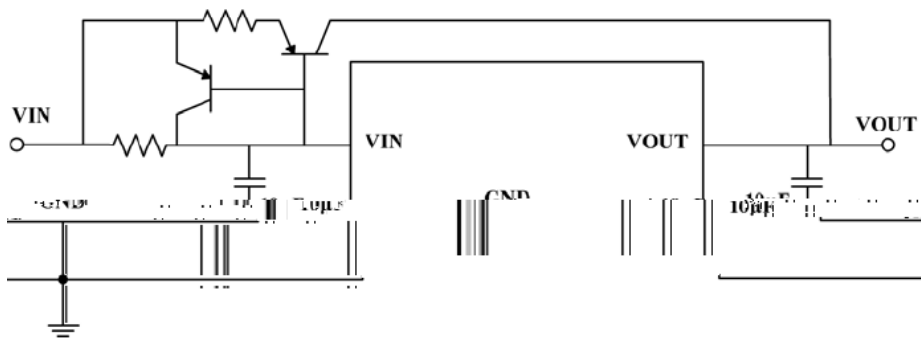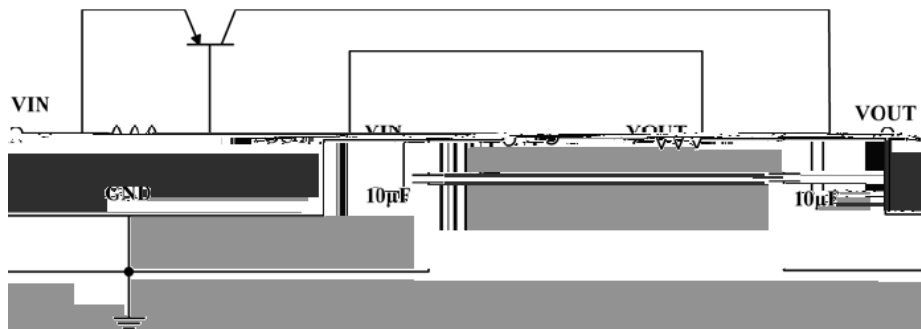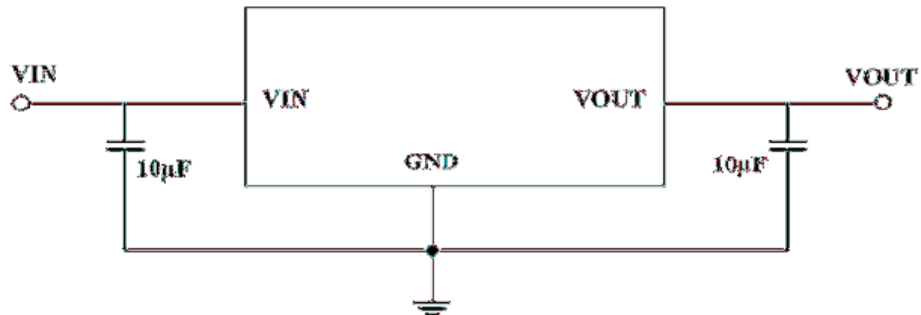


/ Typical Application Circuit

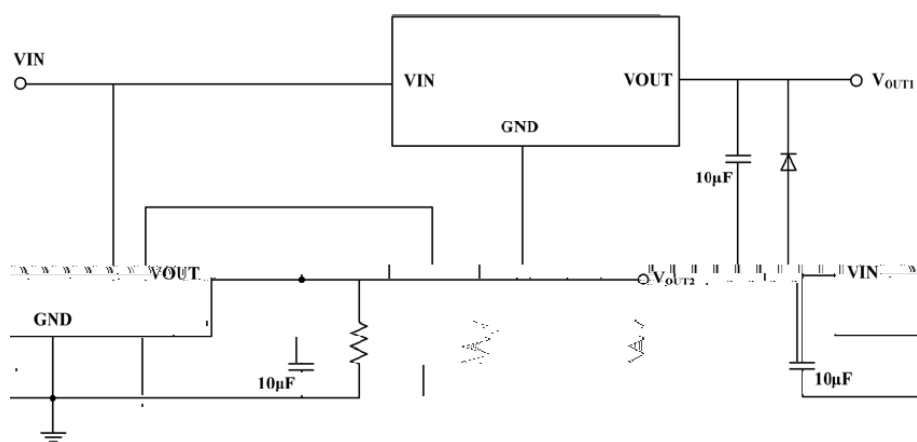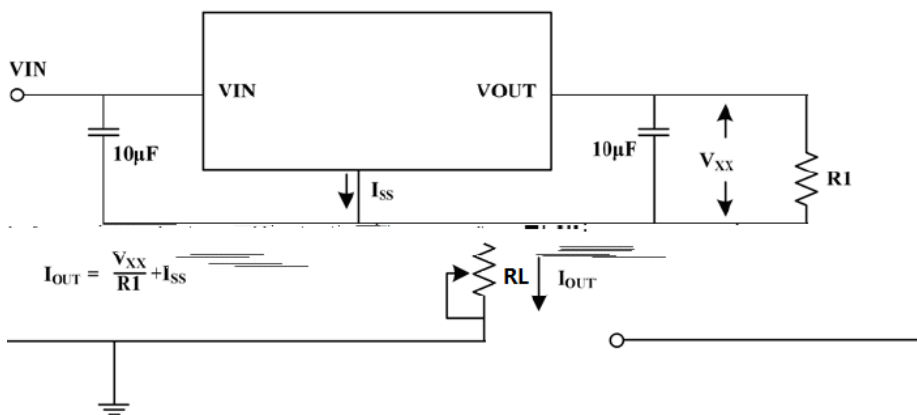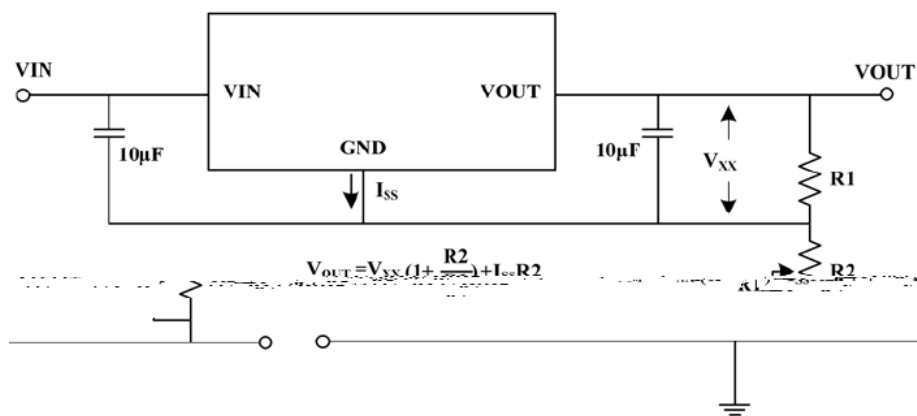


/ Package Dimensions

SOT-89 单位: mm

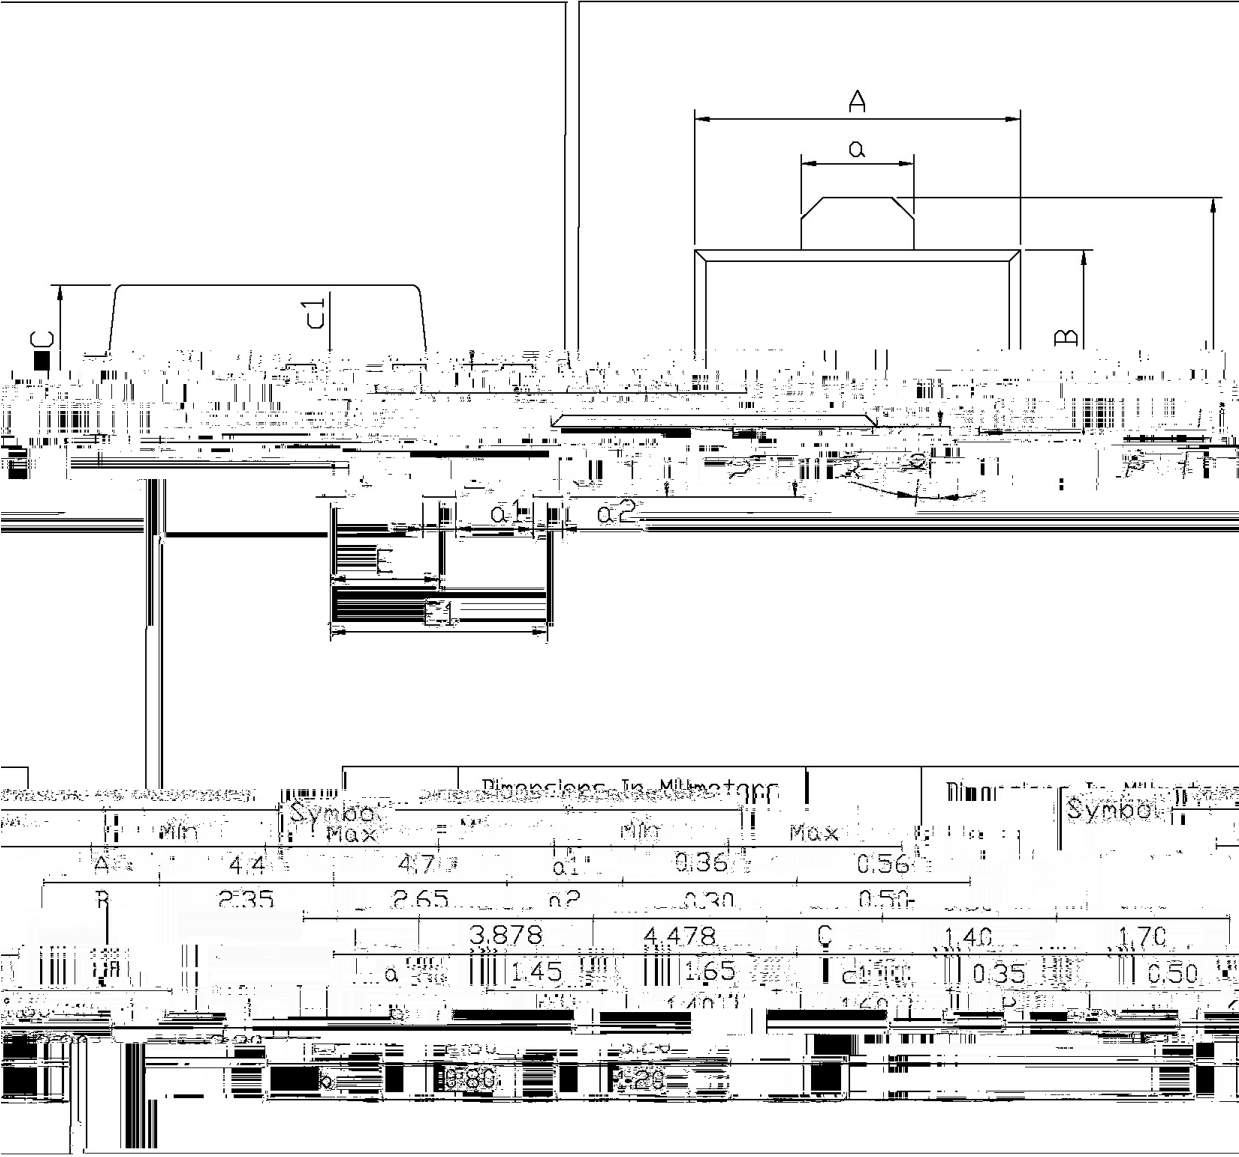


/ Marking Instructions

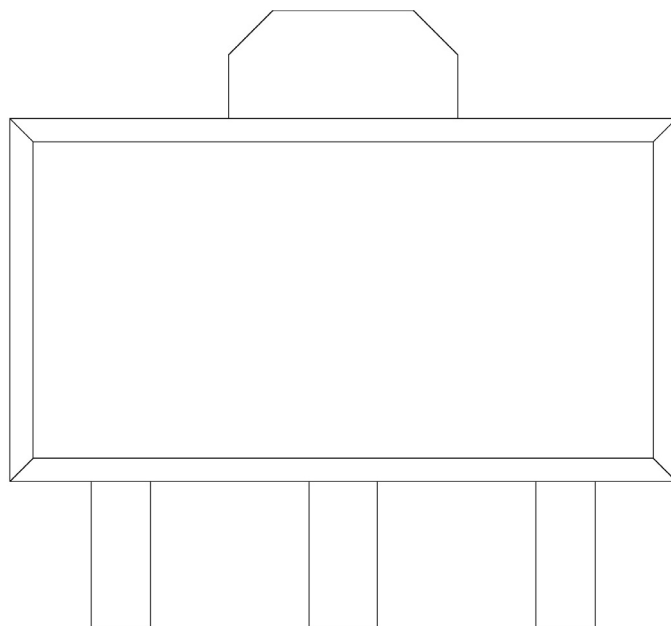

**

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

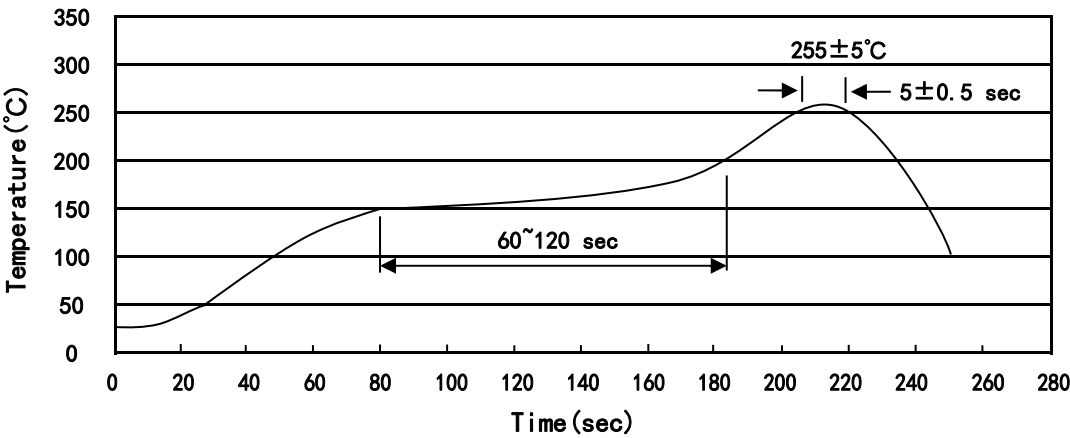

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices