

Rev.A May.-2023



PDFN5 6 N

N-Channel MOSFET in a PDFN5×6 Plastic Package.

AEC-Q101

Low $R_{DS(ON)}$ to minimize conductive loss; low Gate Charge for fast switching; Low Thermal resistance; Qualified to AEC-Q101 Standards for High Reliability; HF Product.

Battery Management, Meet the stringent requirements of automotive applications.

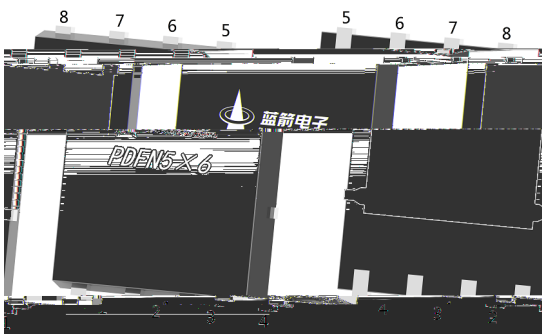

PIN1、2、3: S PIN4: G PIN5、6、7、8: D

See Marking Instructions.

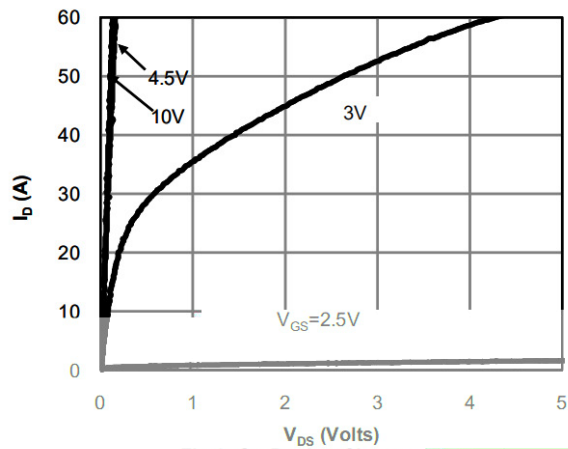


Figure 1: On-Resistance Characteristics

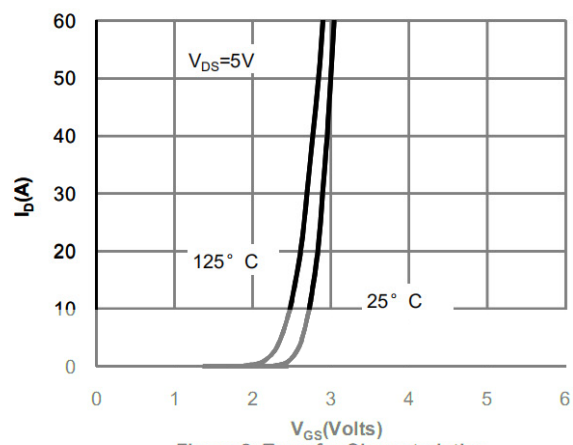


Figure 2: Transfer Characteristics

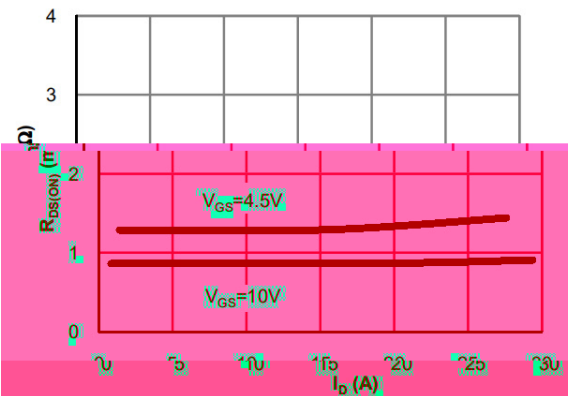


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

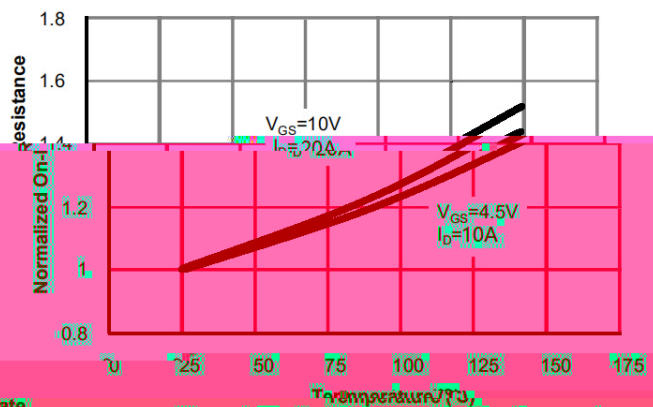


Figure 4: On-Resistance vs. Junction Temperature

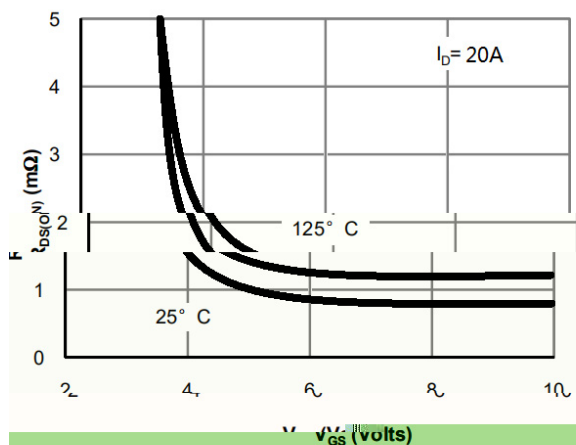


Figure 5: On-Resistance vs. Gate-Source Voltage

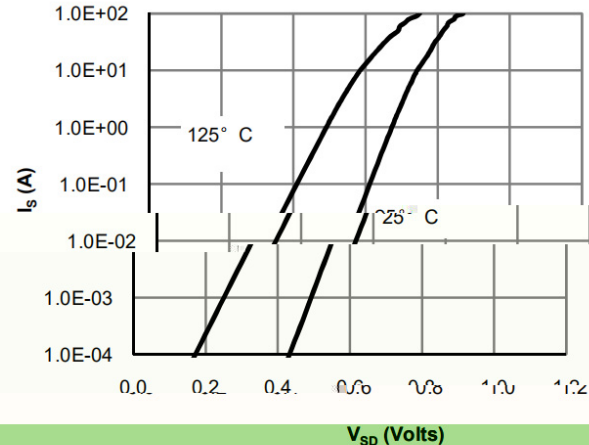


Figure 6: Pulsed Drain Characteristics

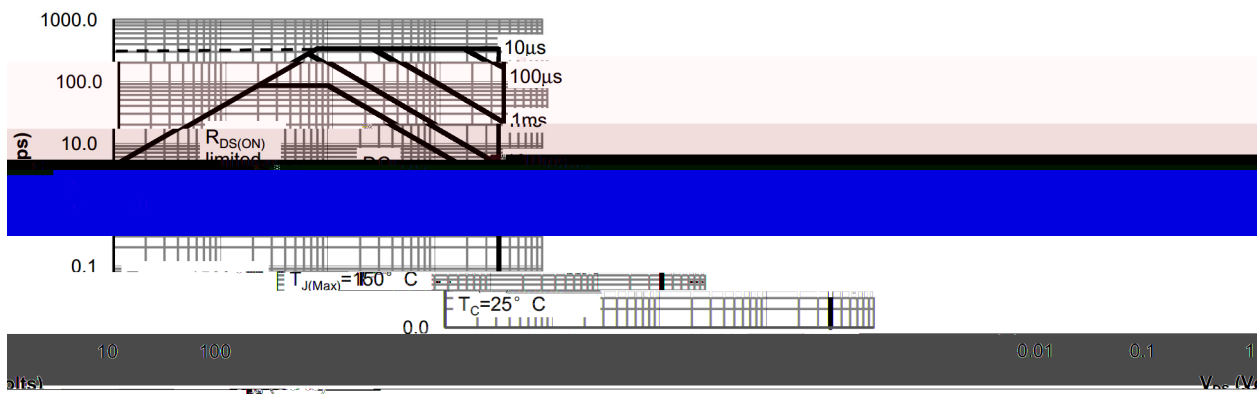
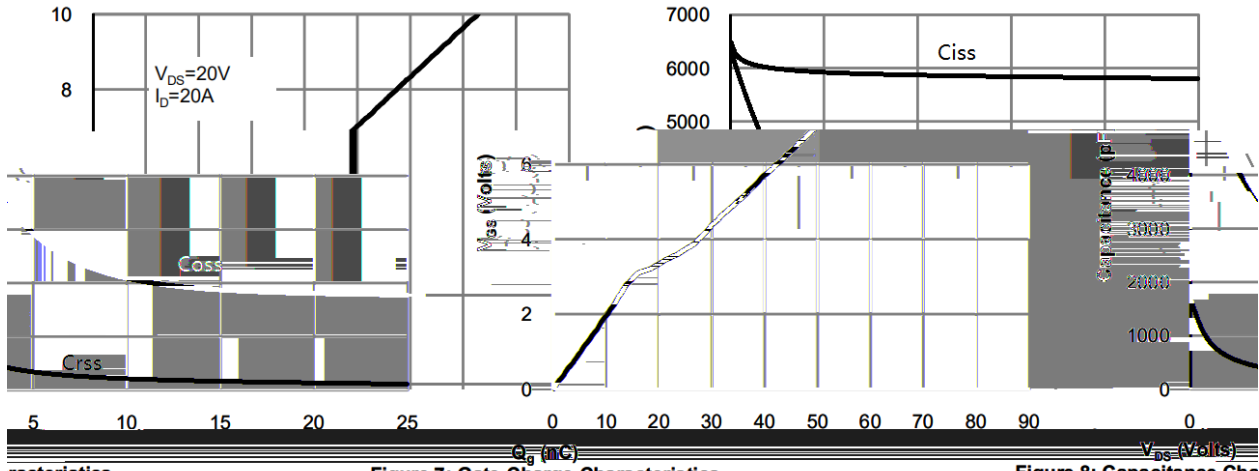


Figure 9: Maximum Forward Biased Safe Operating Area


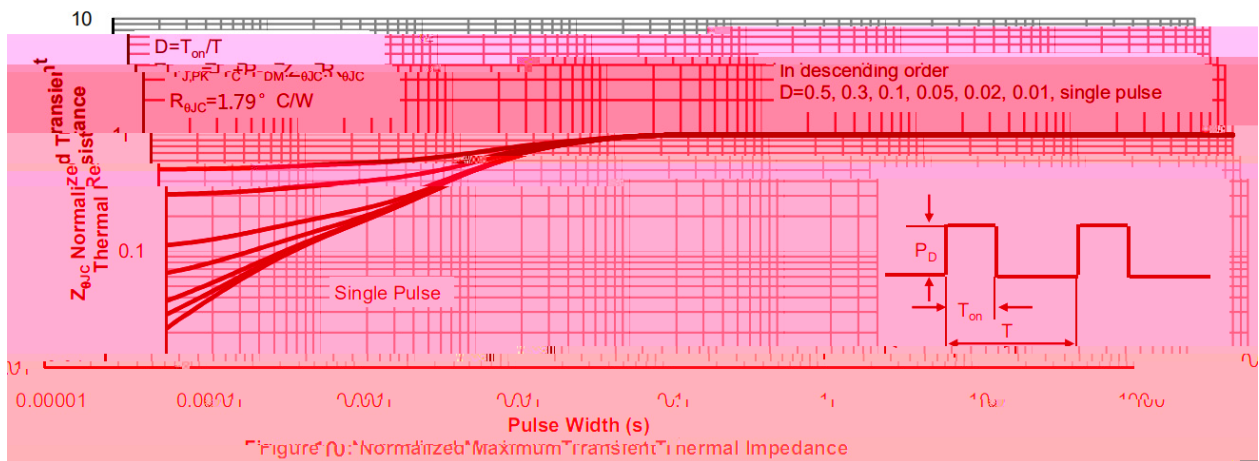



Figure 10: Normalized Maximum Transient Thermal Impedance

PDFN5×6

Unit:mm

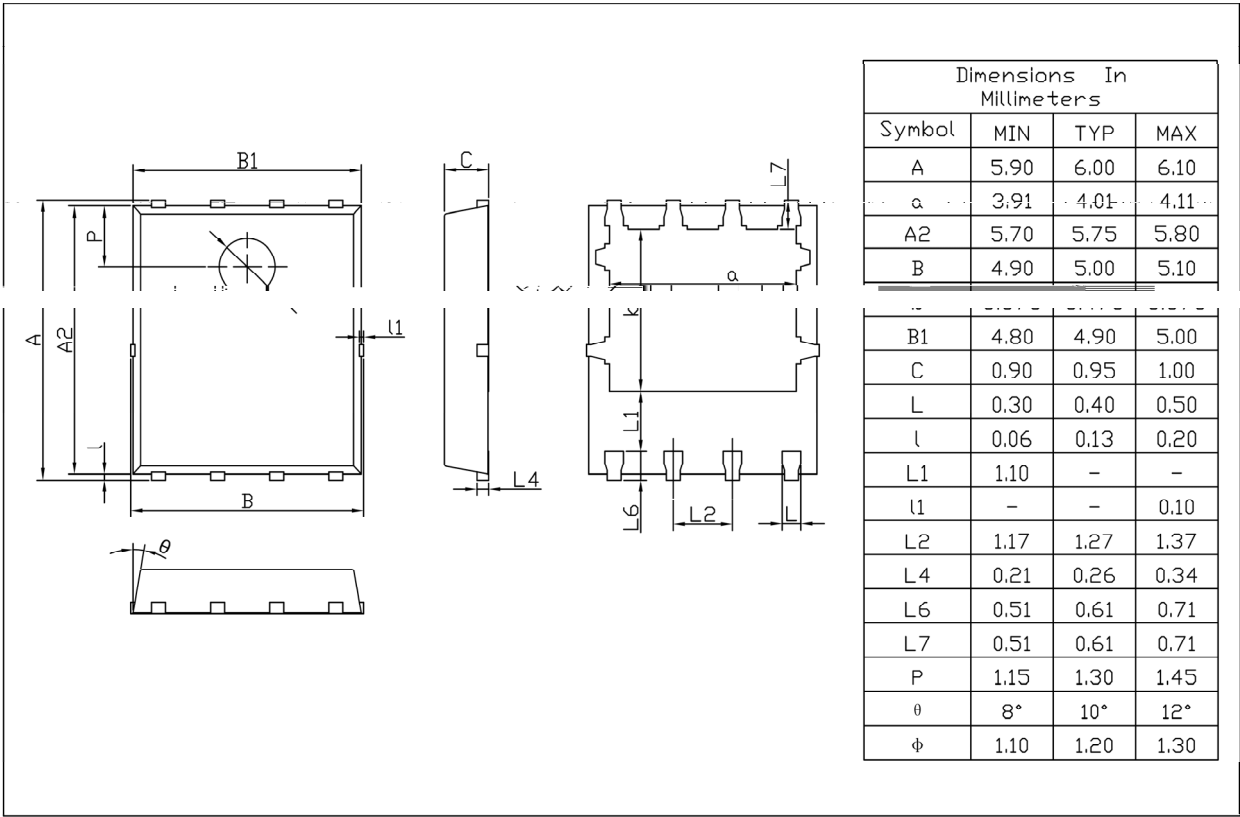

Rev.01 202209

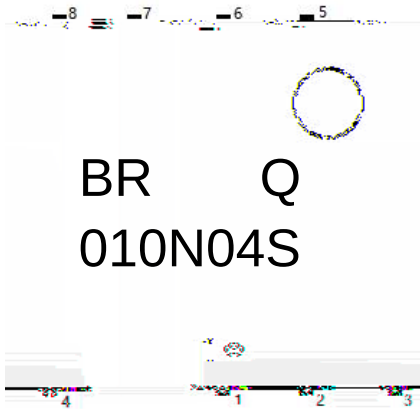

010N04S

Note

BR	Company Code
Q:	Automobile halogen-free product Code
010N04S	Product Type
****:	Lot No. Code, code change with Lot No

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255 5

5 0.5sec;

2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3

2 10

/sec.

3. Cooling Speed: 2~10 /sec.