
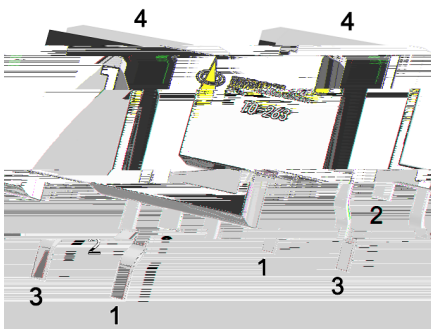


$\leq \quad \Omega \quad \Omega$

BMS






		℃		
			±	
		℃		
	≤	θ		
		θ		

Drain-Source Breakdown Voltage						
					±	
						Ω
						Ω



		Ω Ω				

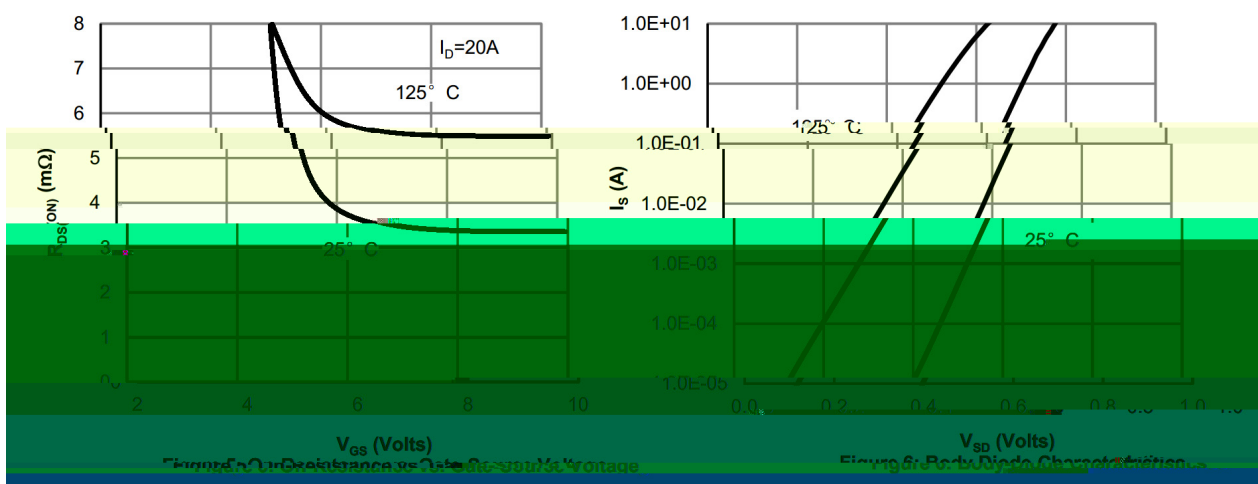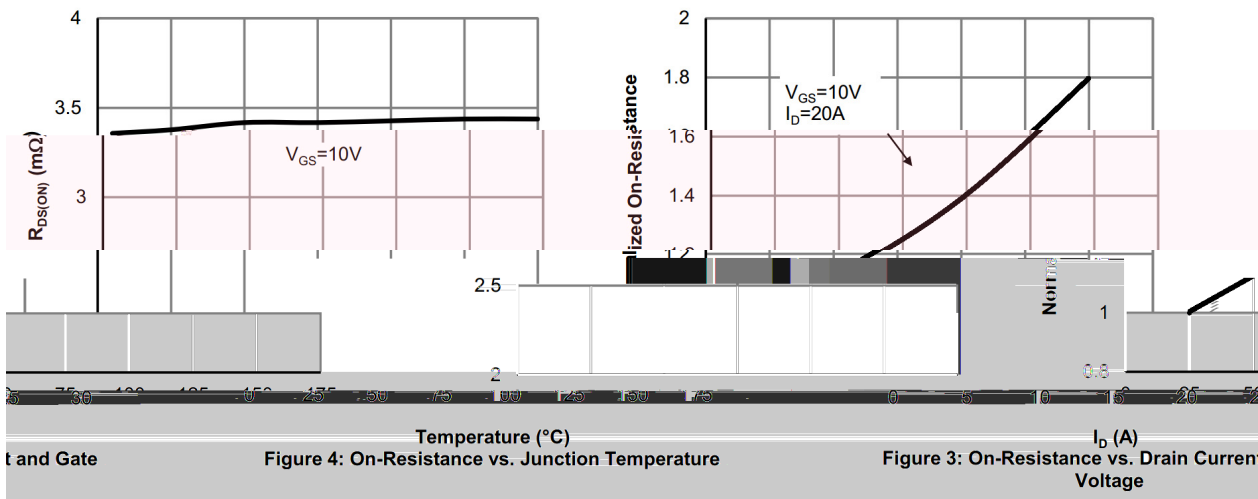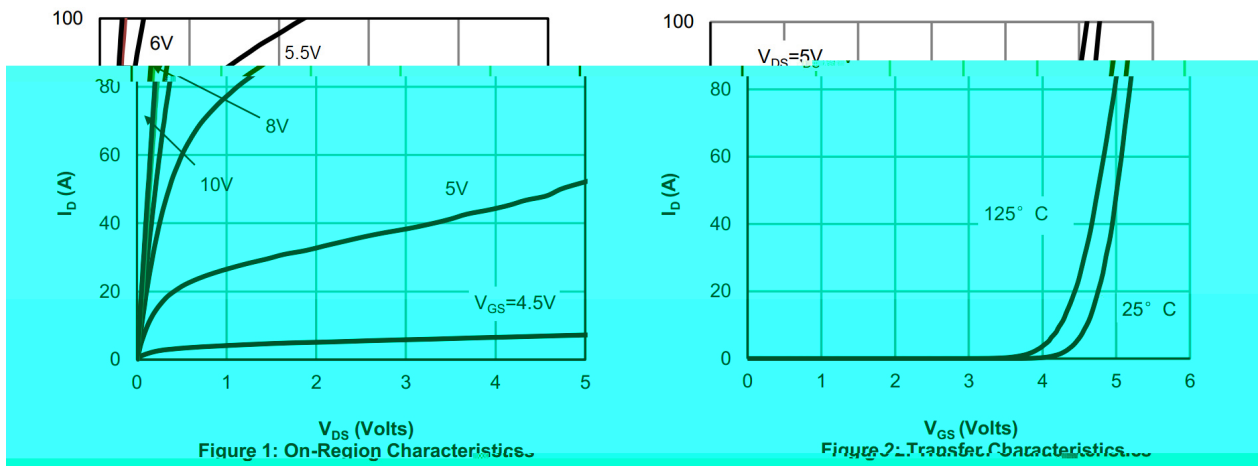

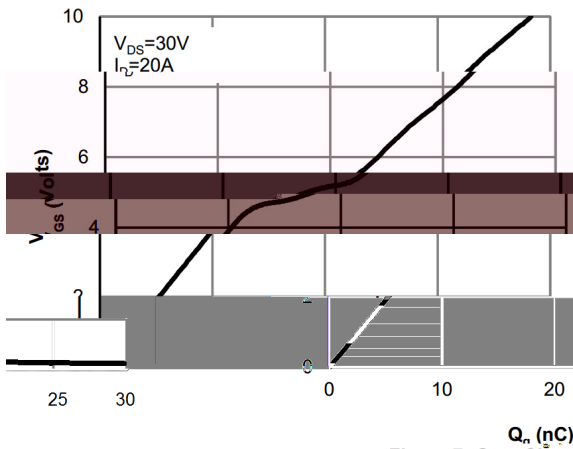


Figure 7: Gate-Charge Characteristics

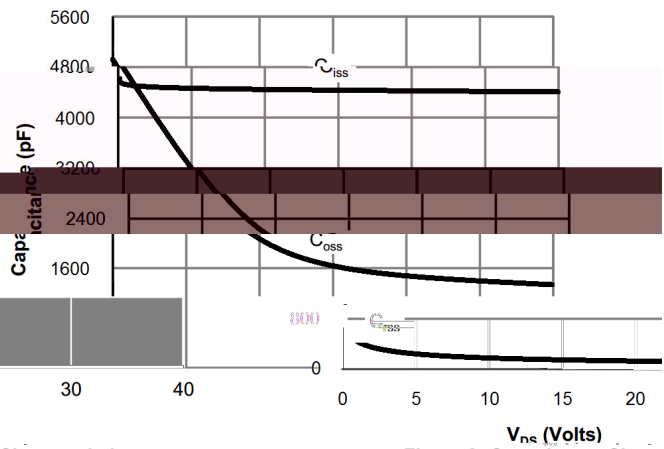


Figure 8: Capacitance Characteristics

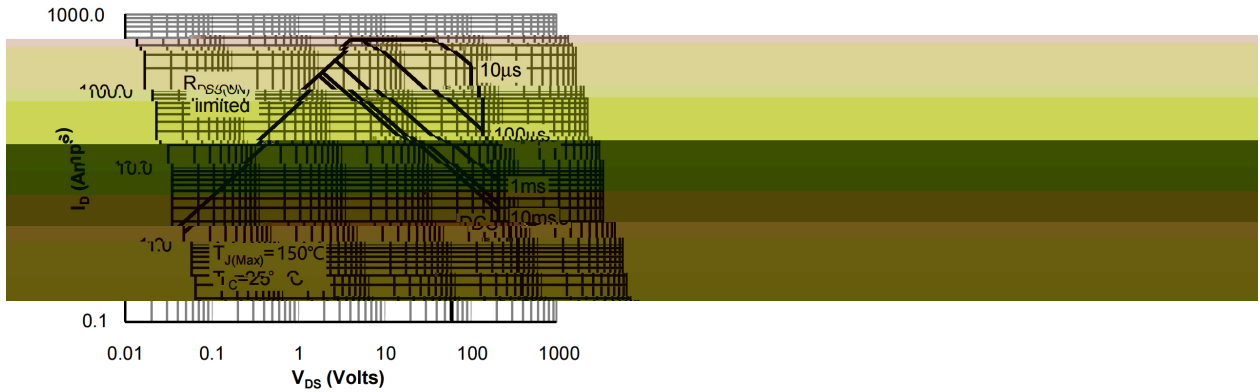


Figure 9: Maximum Forward Biased Safe Operating Area



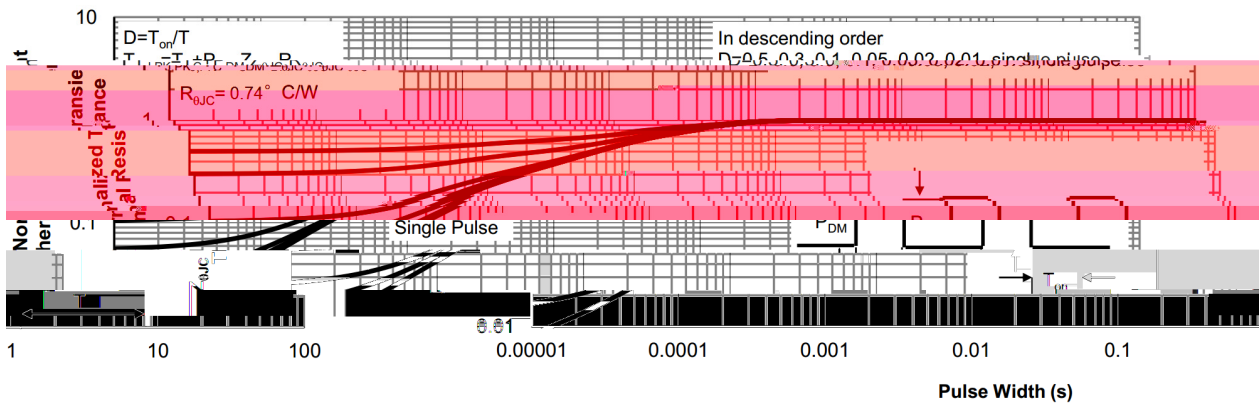


Figure 10: Normalized Maximum Transient Thermal Impedance



ers er Dimensions In Millimeters Dimensions In Millimet

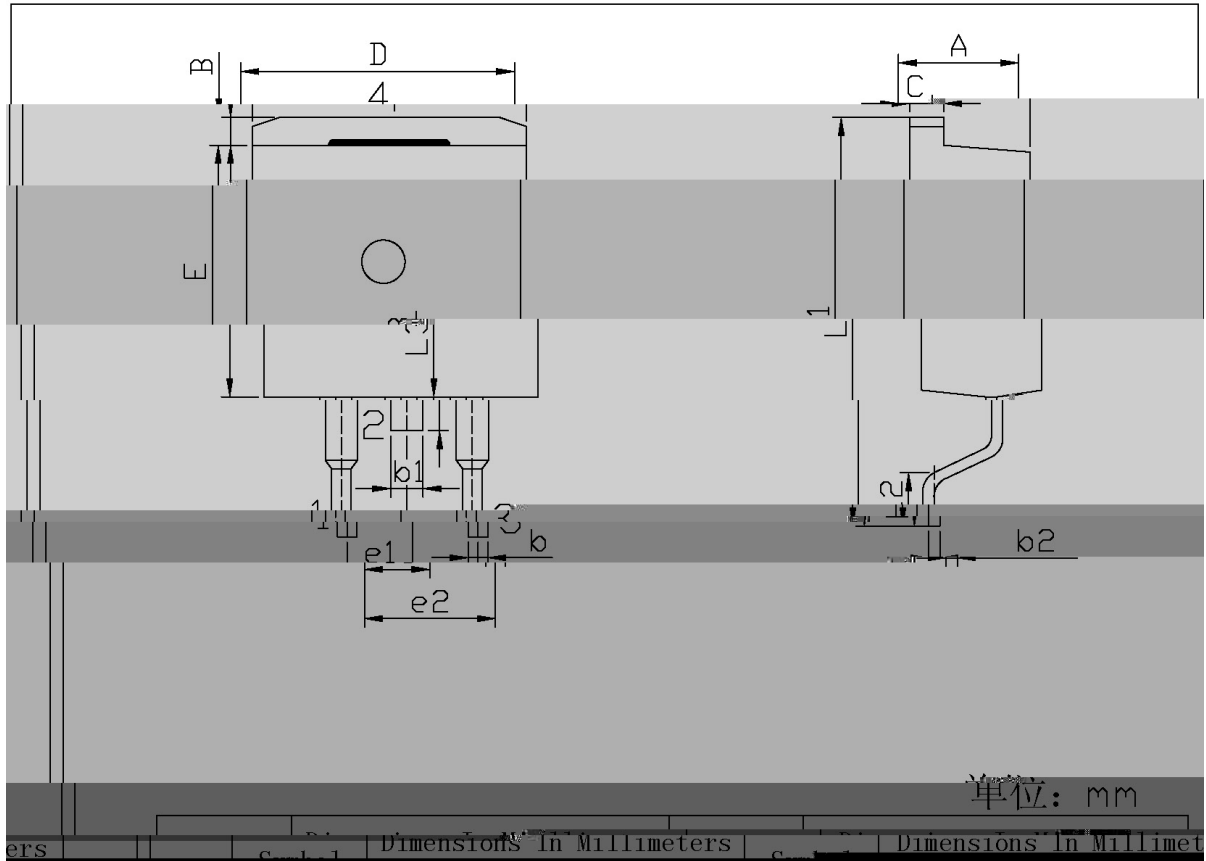


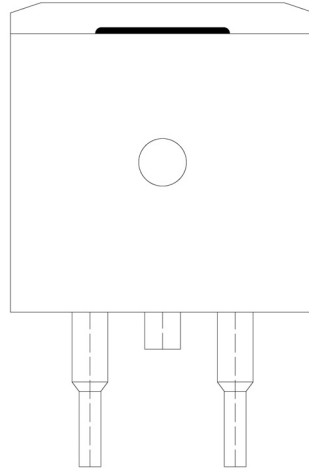

BR

035N06SH

Temperature Profile for IR Reflow Soldering(Pb-Free)

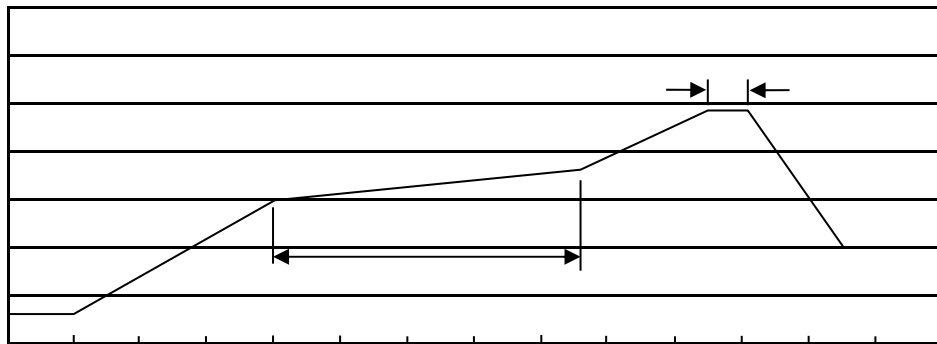

±

±

±

±

±

±

						"		
