

BRCS040N03YB

/ Descriptions

PDFN3×3A-8L N MOS

x



/ Features

±

≤

≤

/

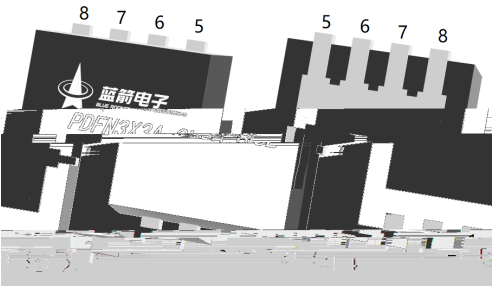

/ Marking

/ Absolute Maximum Ratings(Ta=25)

		℃		
			±	
		℃		
	≤	θ		
		θ		

/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω




BRCS040N03YB






DATA SHEET

--	--	--	--	--	--	--

I Electrical Characteristic Curve

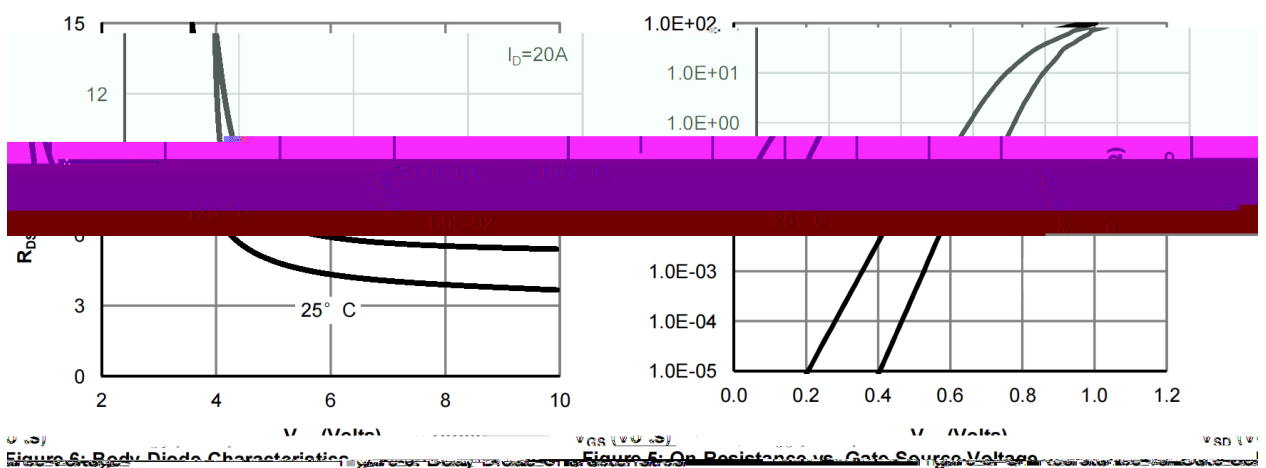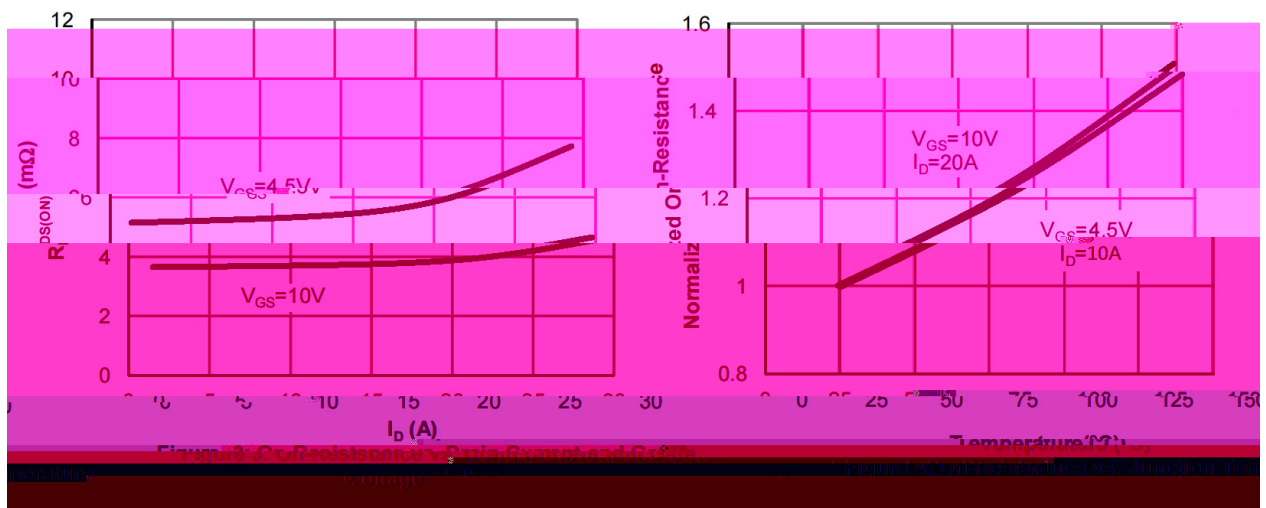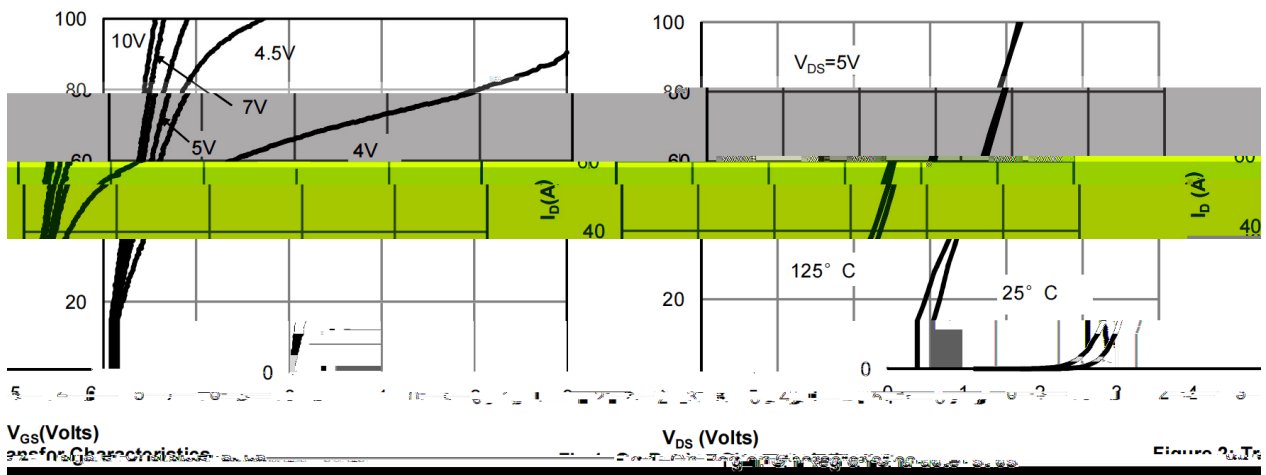


/ Electrical Characteristic Curve

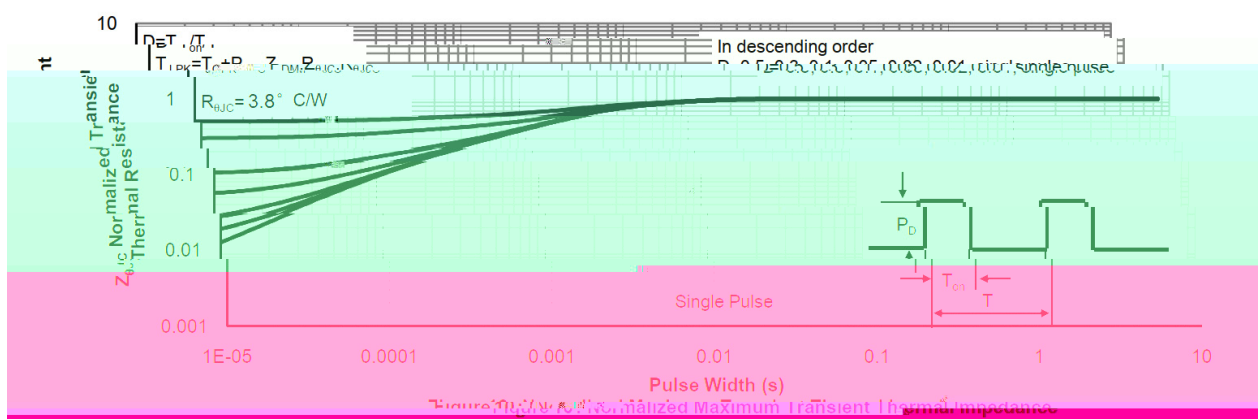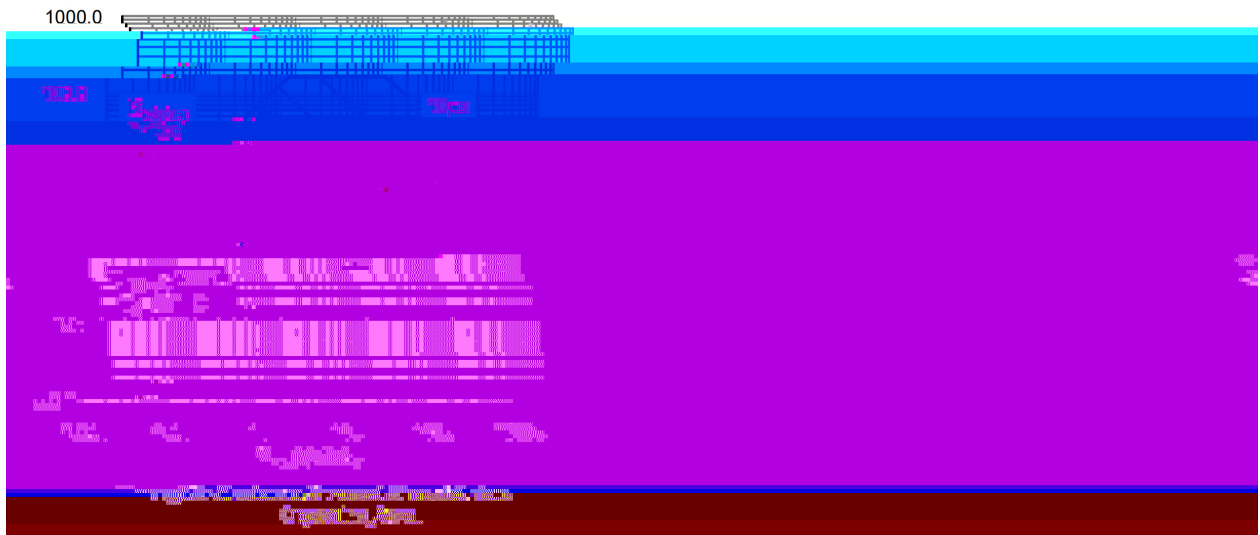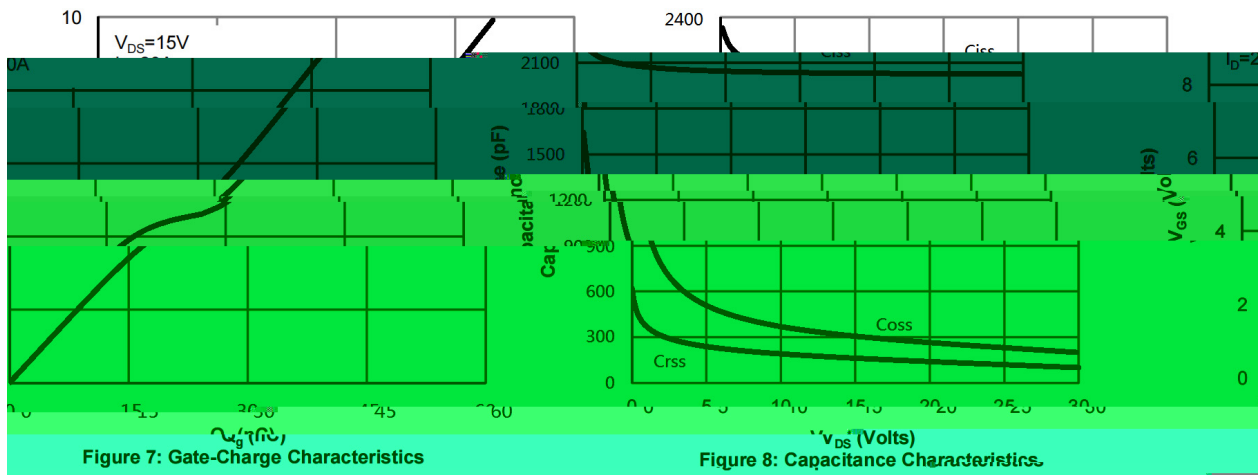

/ Package Dimensions


PDFN3X3A-8L

Unit:mm

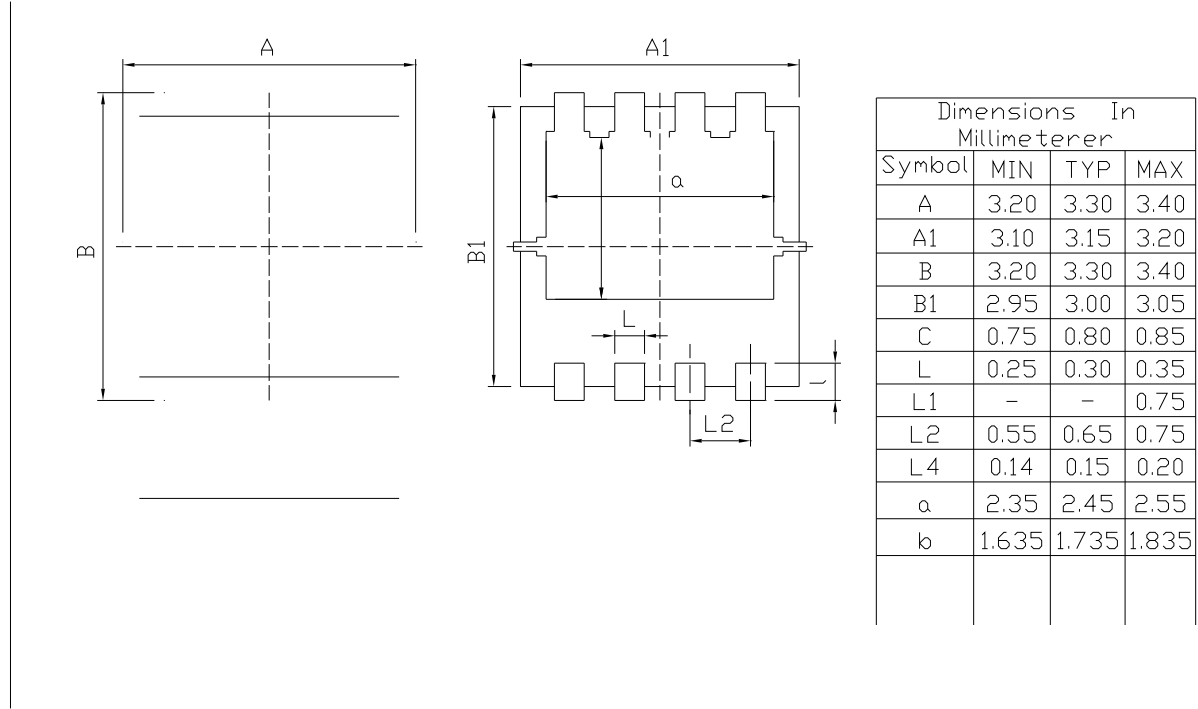


Rev.00 202011

/ Marking Instructions

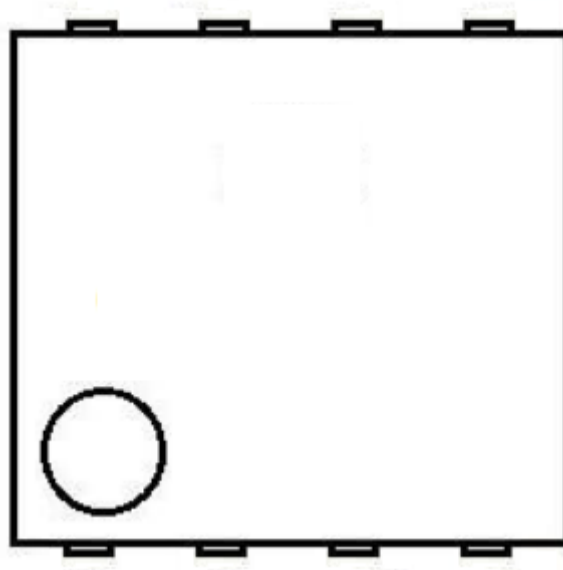

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

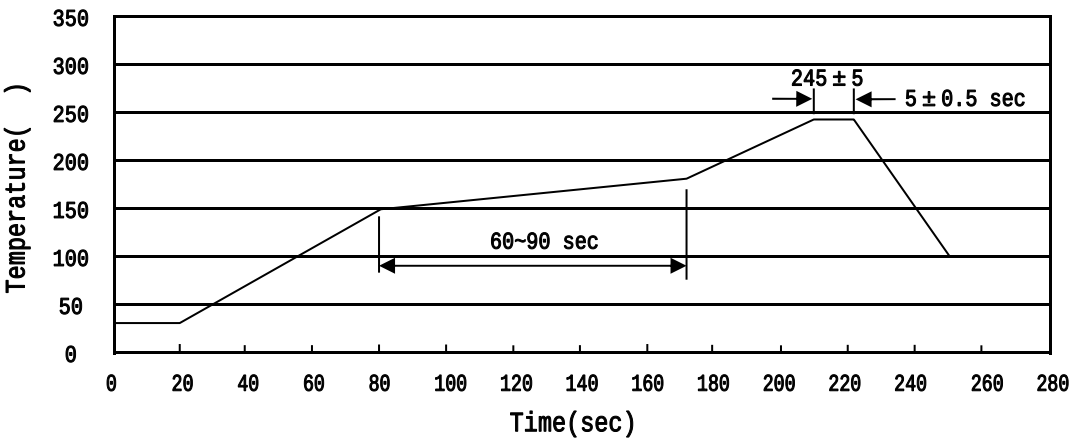

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						"		

/ Notices