
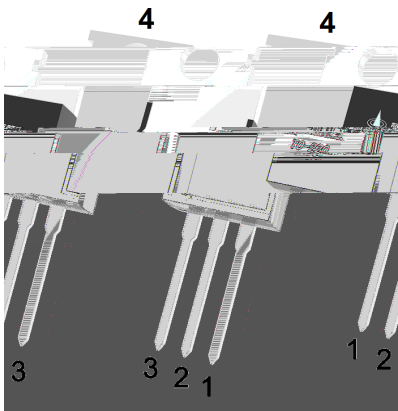


$$\begin{matrix} \leq & \Omega & \Omega \\ \leq & \Omega & \Omega \end{matrix}$$

EPV



		θ		$\frac{3}{8}$
		θ		

		μ				
						μ
		μ				
						Ω
						Ω



		Ω Ω				







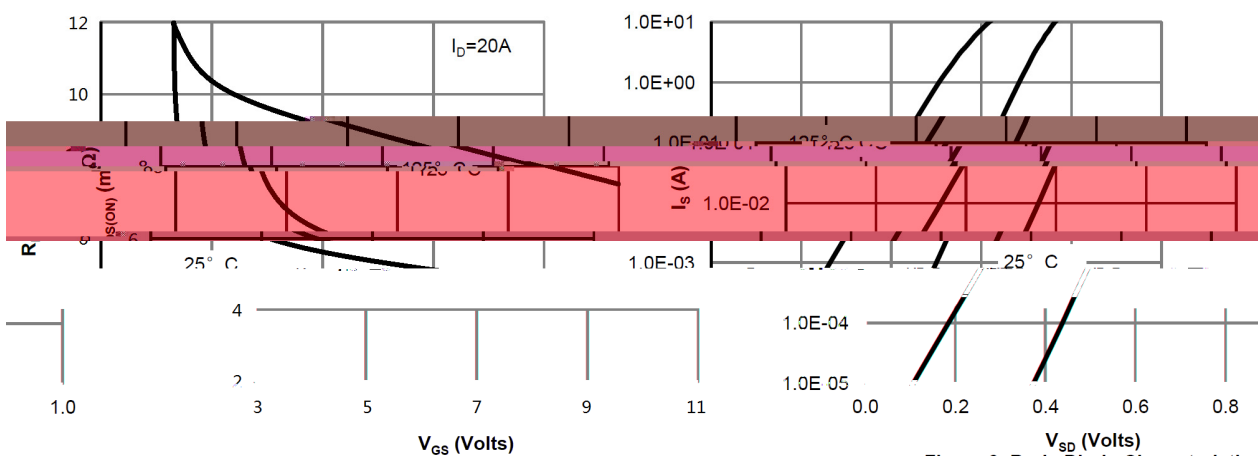



Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics

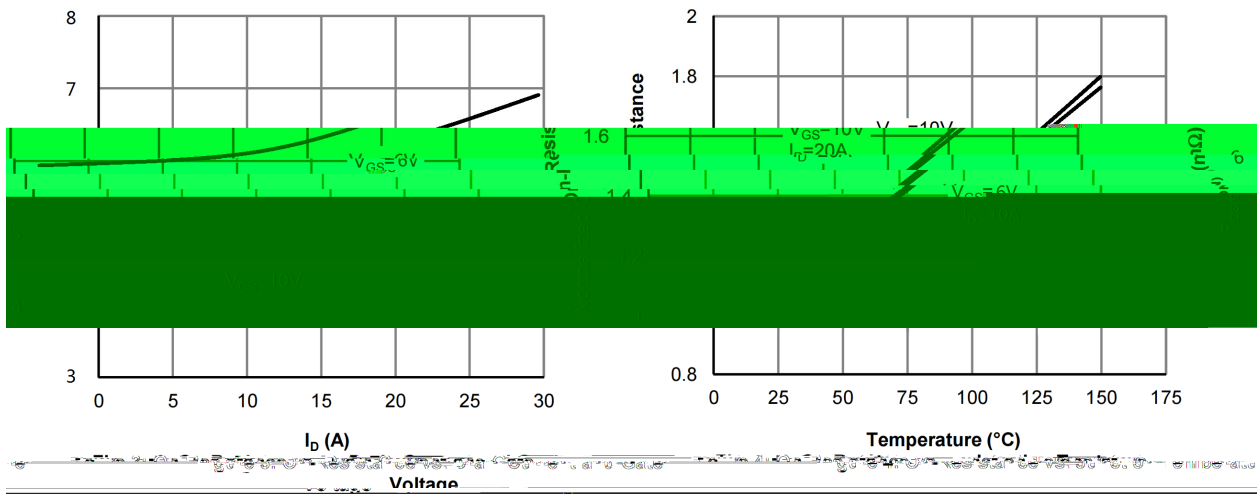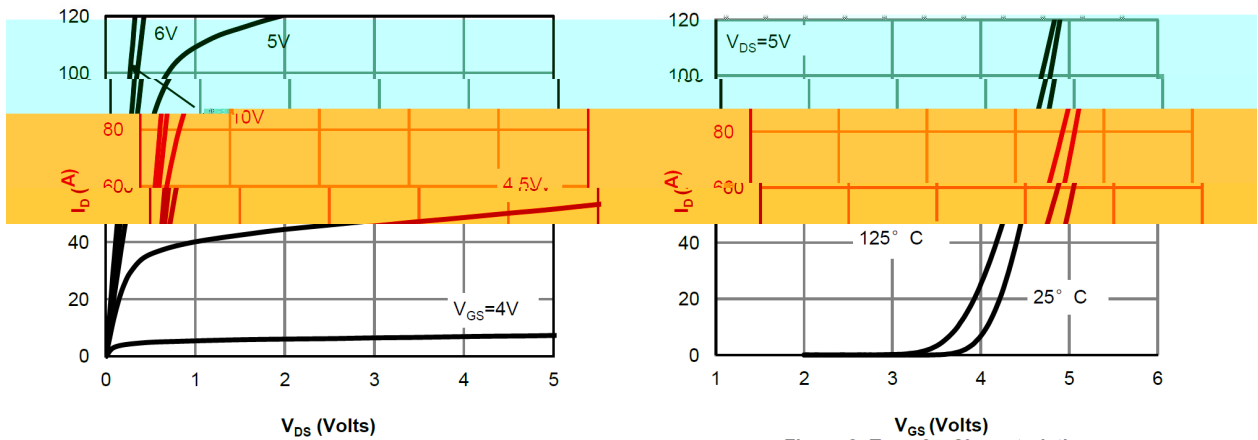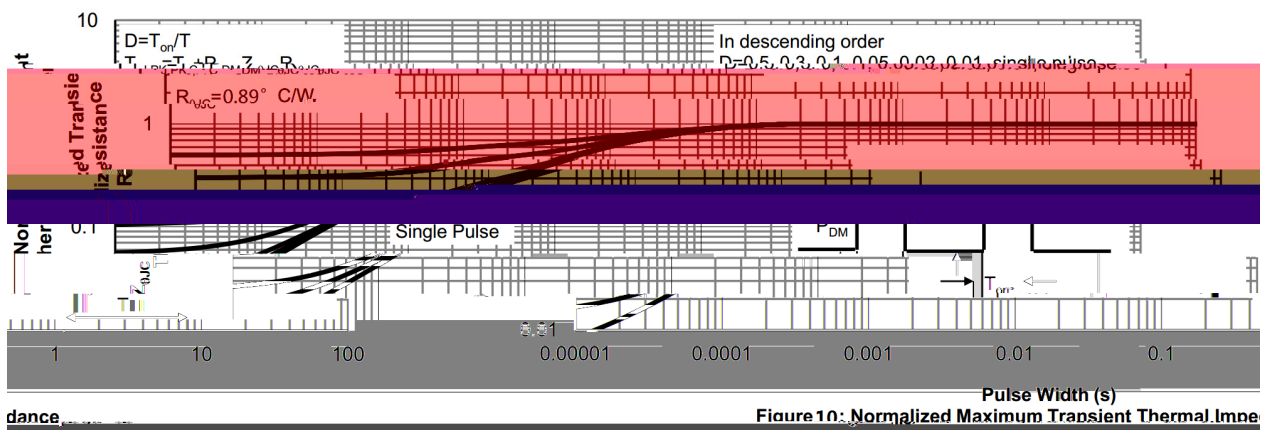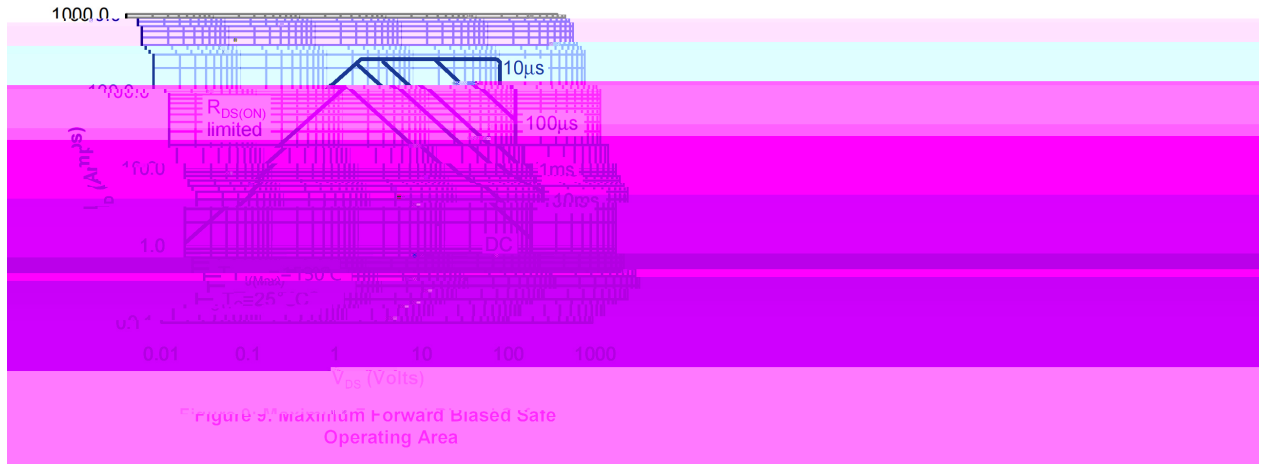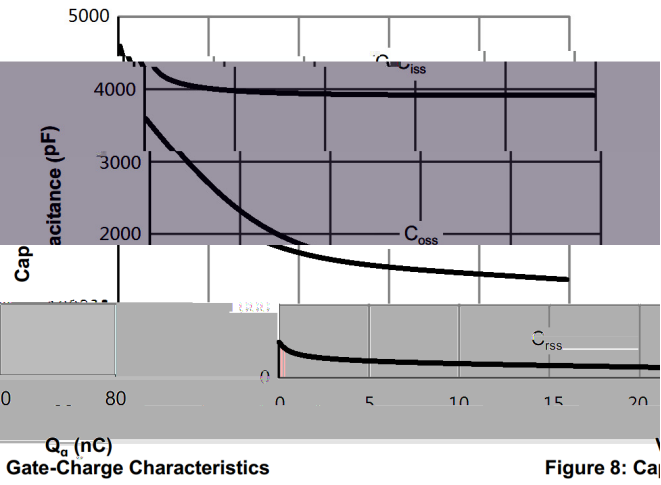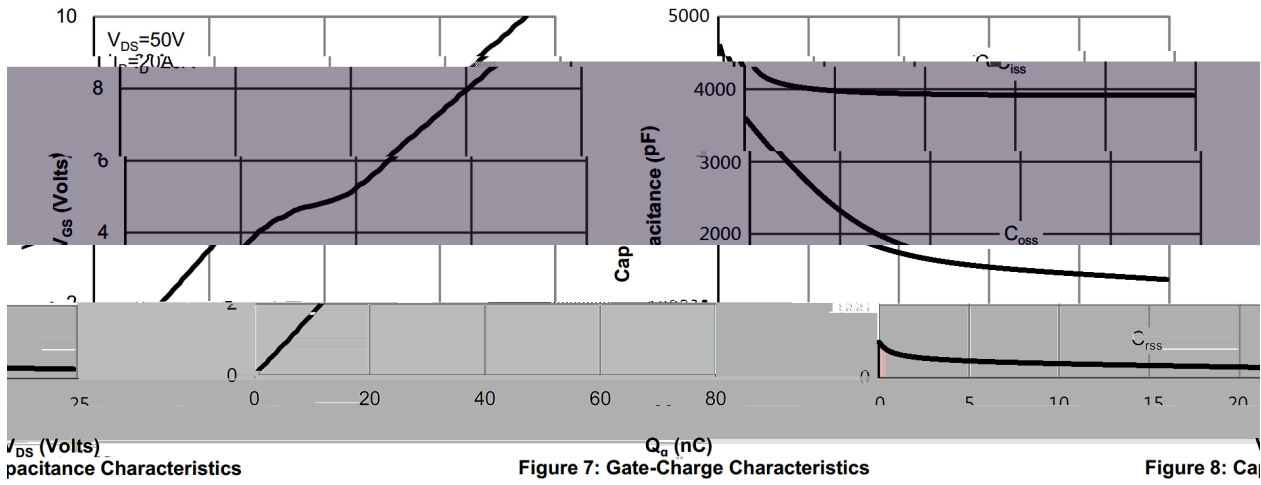

T0-220

单位: mm

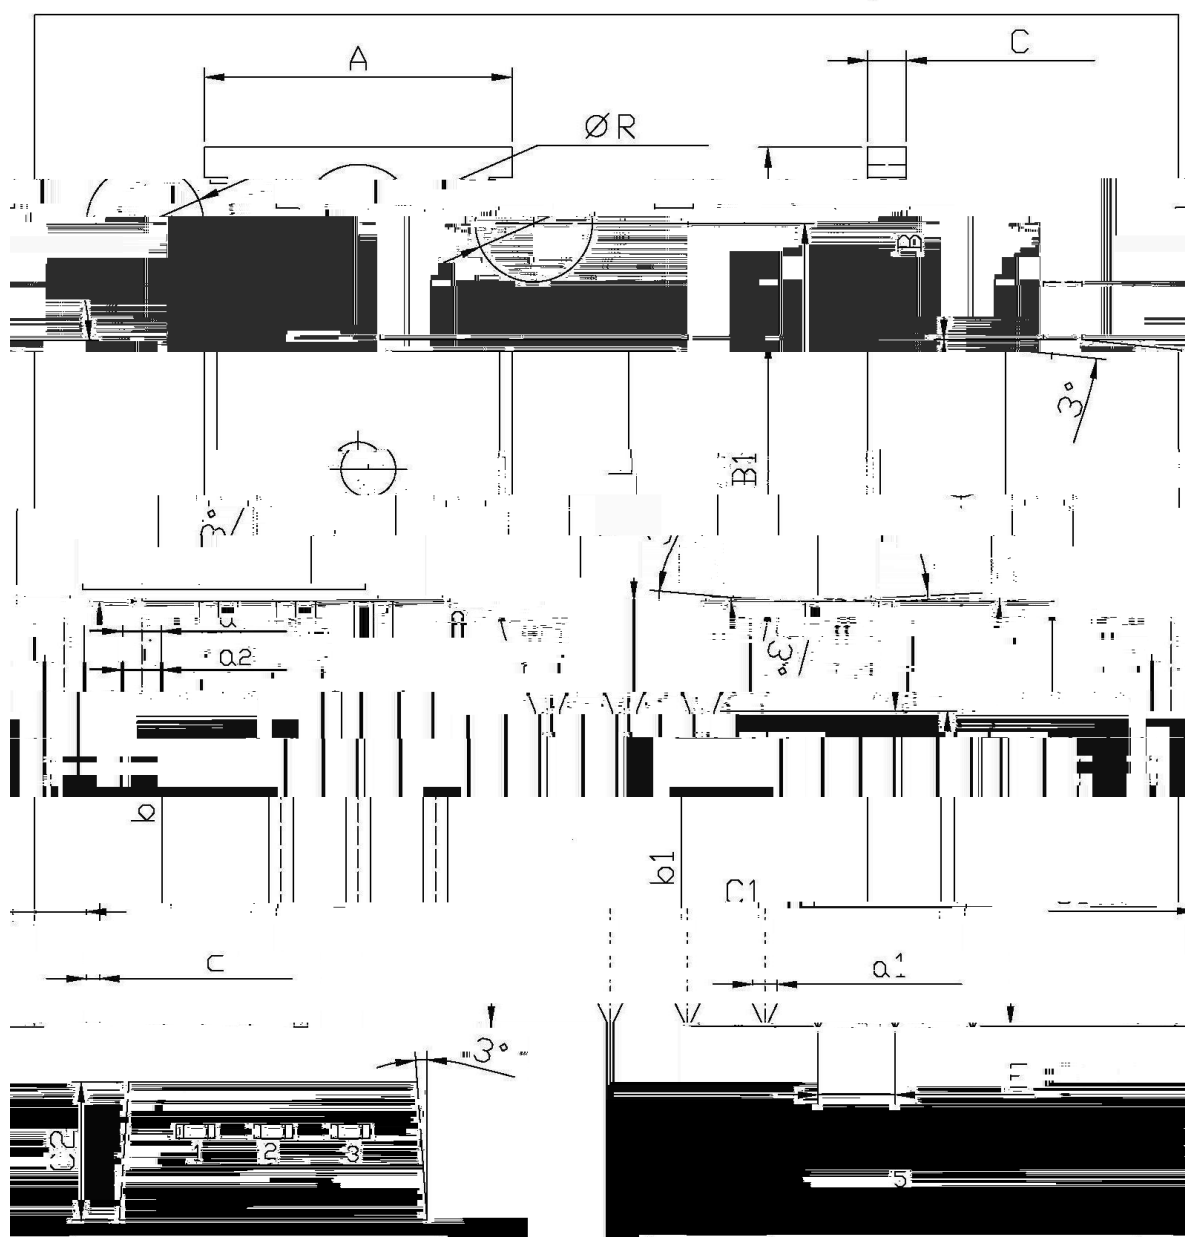


Dimensions In Millimeters

Symbol	Min	Max
A	9.8	10.2
R	3.56	3.64
B	15.7	16.1
B1	12.6	13.6
C	9.4	9.6
C1	2.6	2.8
a1	1.4	1.6
a2	6.7	6.9
b1	1.4	1.6

Dimensions In Millimeters

Symbol	Min	Max
A	9.8	10.2
R	3.56	3.64
B	15.7	16.1
B1	12.6	13.6
C	9.4	9.6
C1	2.6	2.8
a1	1.4	1.6
a2	6.7	6.9
b1	1.4	1.6

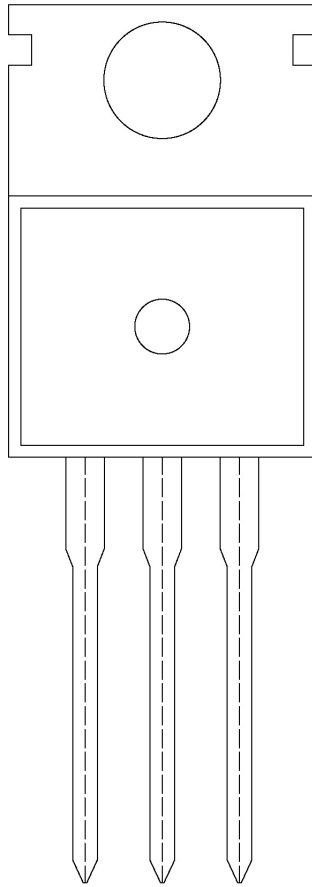

EU

388Q43VK


$$2 \frac{3}{8} \qquad 2$$

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box