



x




$\leq$	Ω	Ω
$\leq$	Ω	Ω

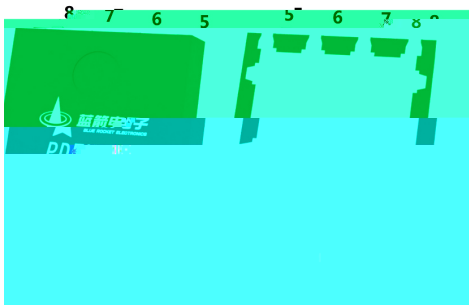

		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω



		Ω				

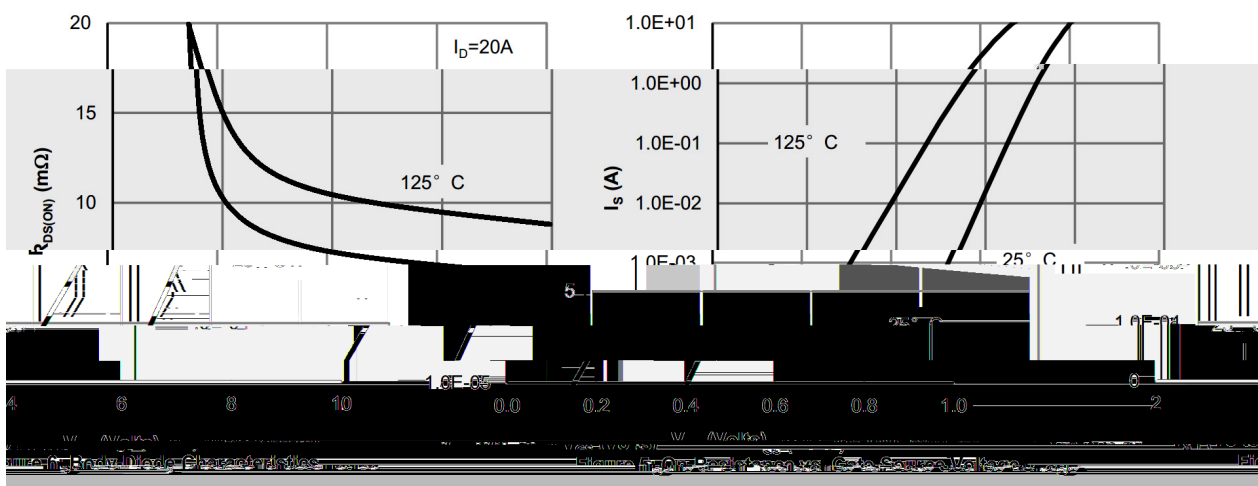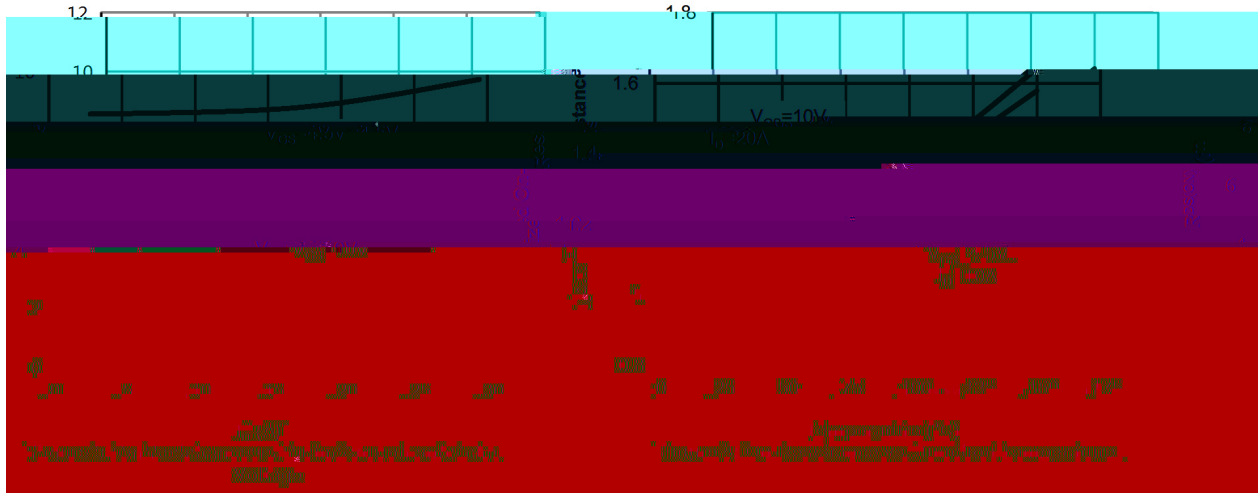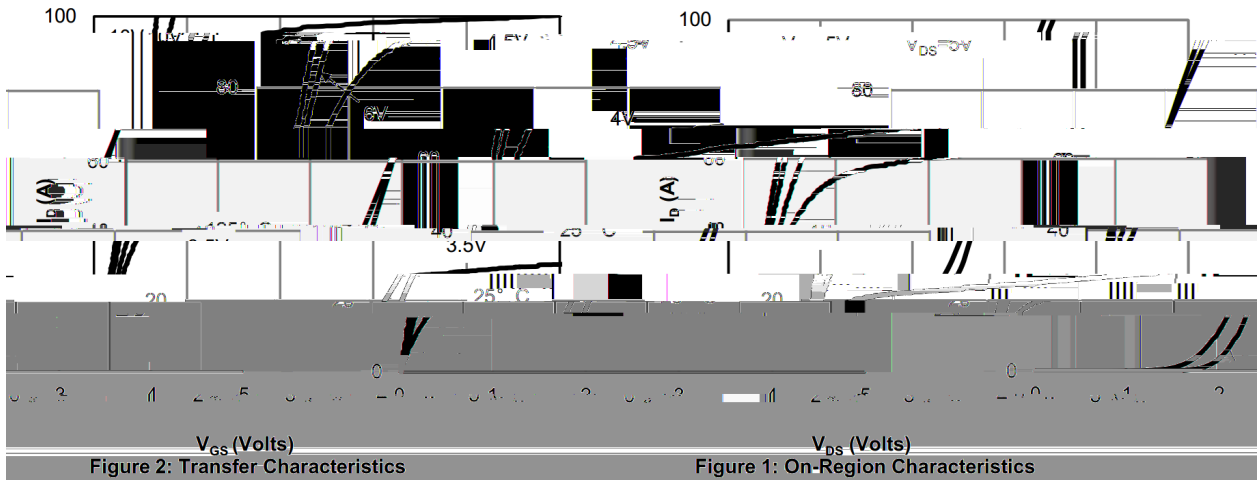

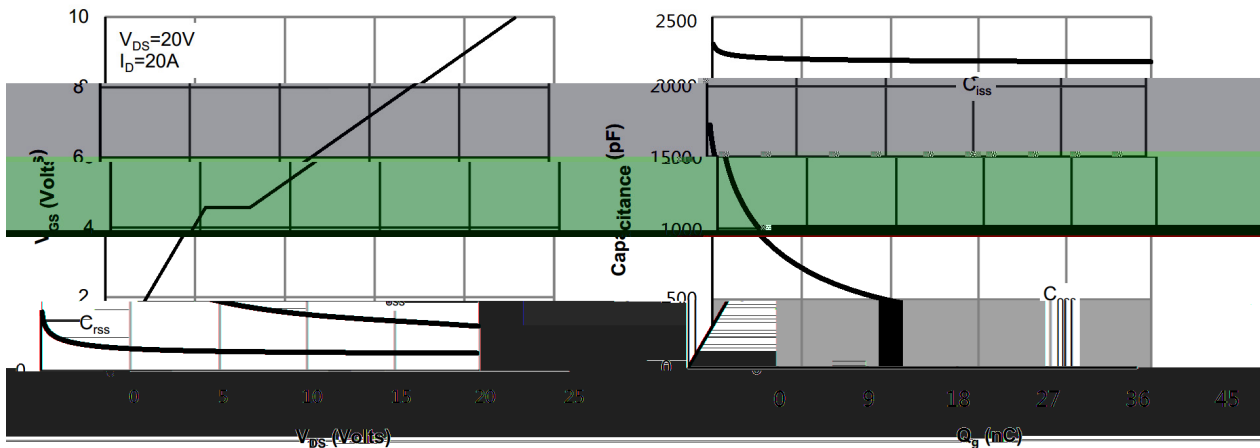


Figure 8: Capacitance Characteristics

Figure 7: Gate-Charge Characteristics

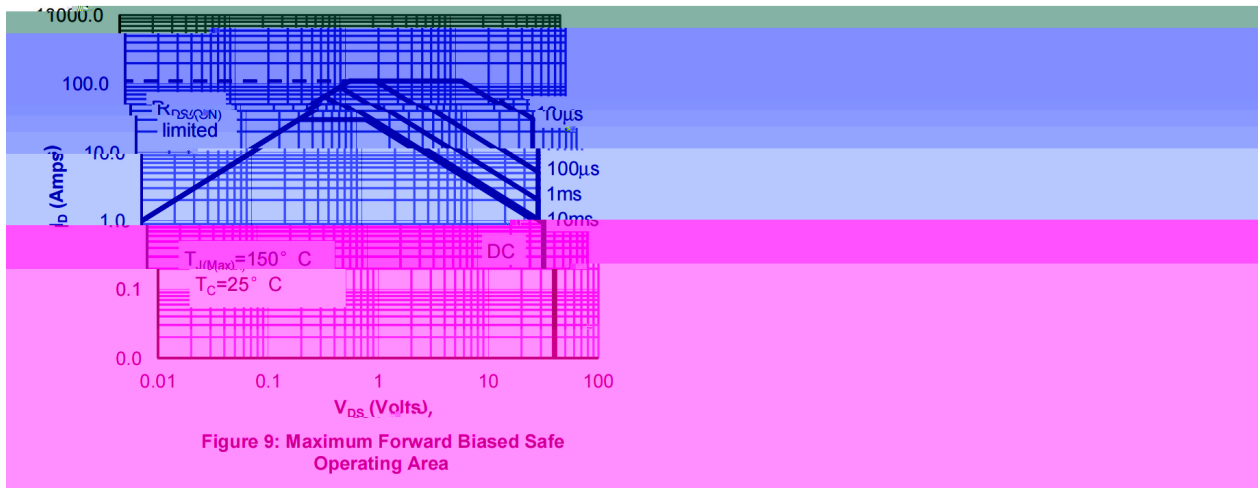


Figure 9: Maximum Forward Biased Safe Operating Area


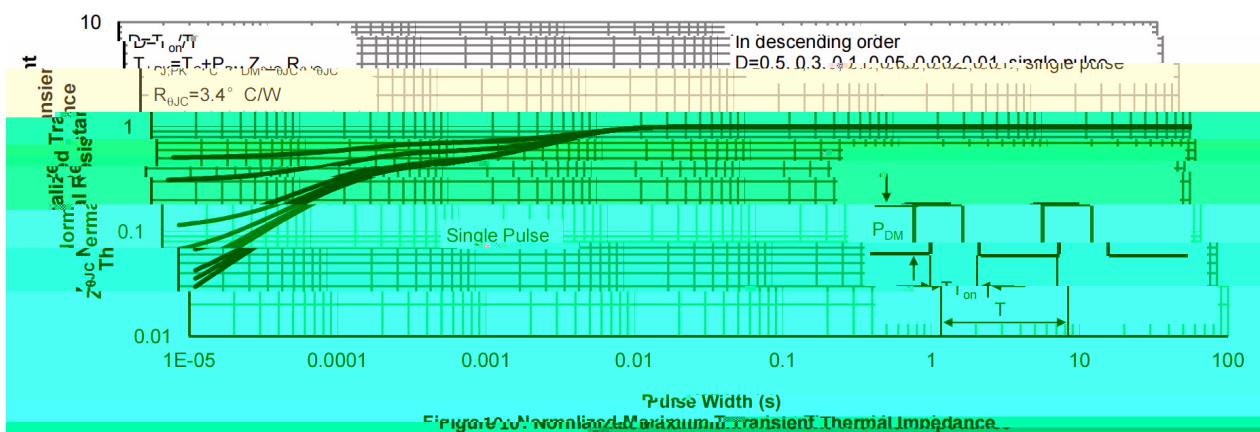



Figure 10: Normalized Maximum Transient Thermal Impedance

PDFN5 X6

Unit:mm

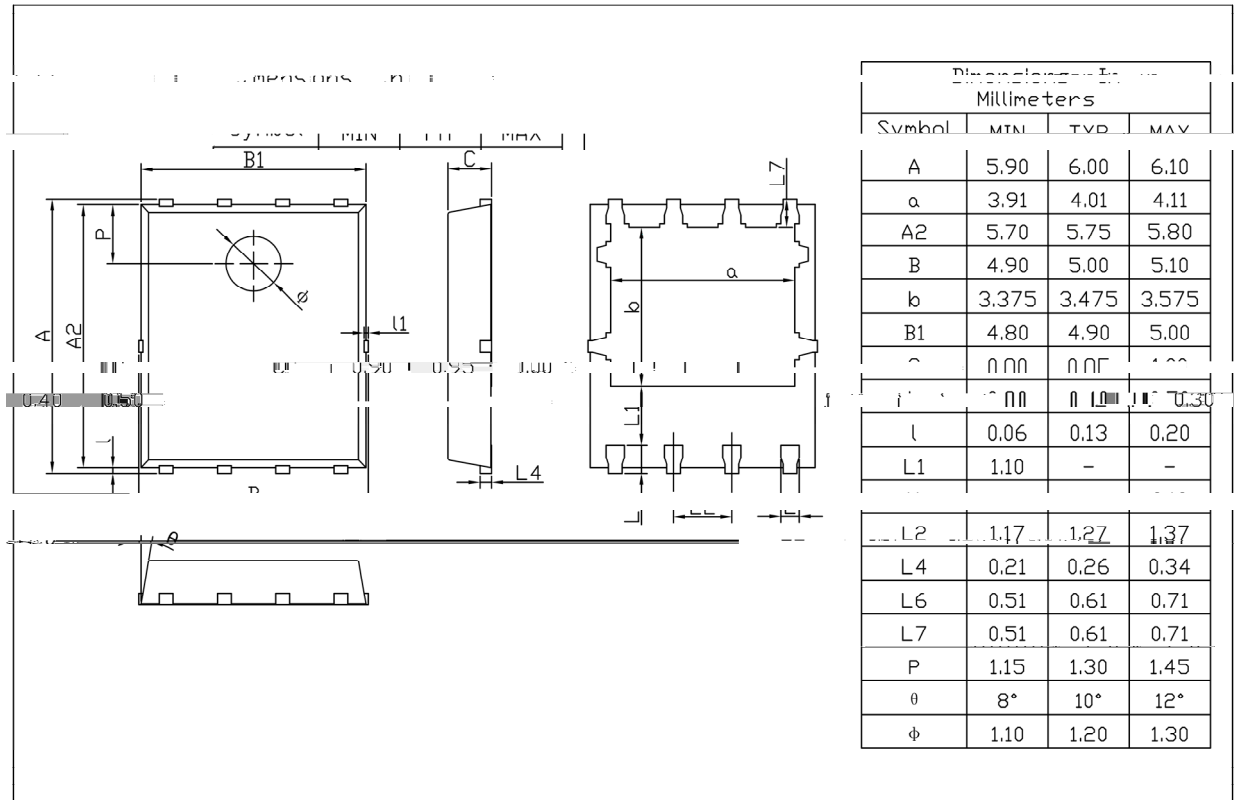

Rev.01 202209

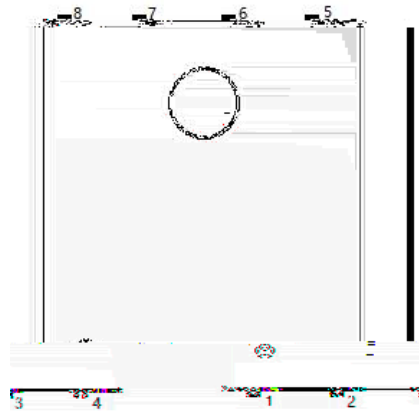

BR

Q



$\pm$ $\pm$ $\pm$ $\pm$



$\pm$ $\pm$

