


/ Descriptions

/ Features


$\leq$
 $\leq$

/ Applications

/ Equivalent Circuit



/ Pinning

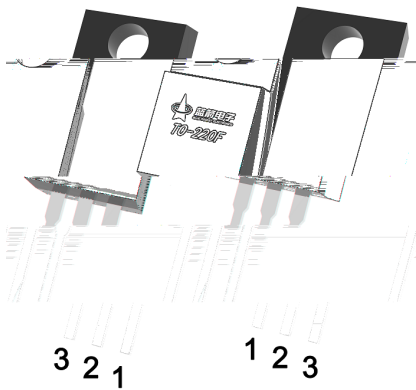

/ Marking

/ Absolute Maximum Ratings(Ta=25)




		℃		
			±	
		℃		
	≤	θ		℃
		θ		

/ Electrical Characteristics(Ta=25)




		μ				
						μ
					±	
		μ				
						Ω
						Ω
						Ω

--	--	--	--	--	--	--


/ Electrical Characteristic Curve

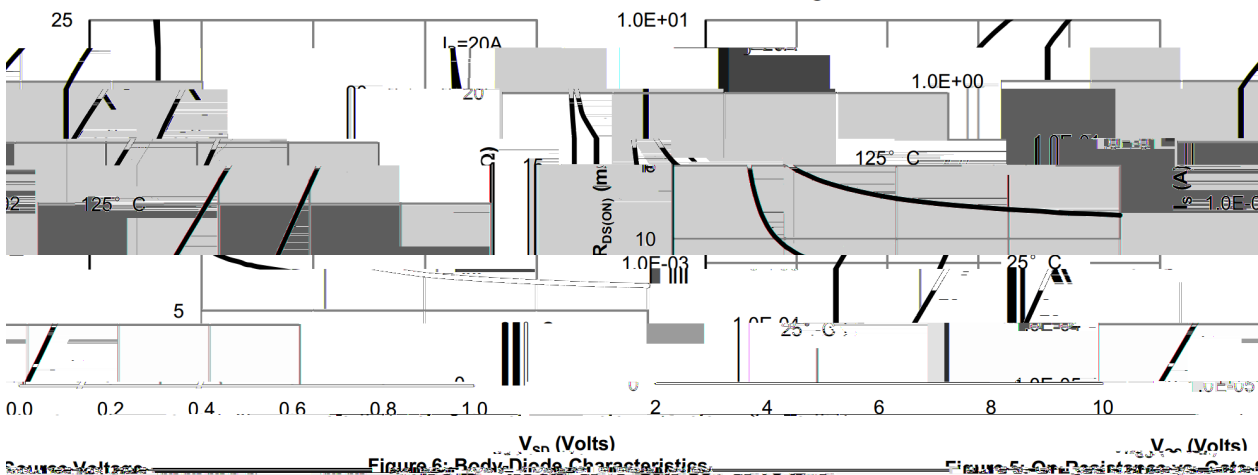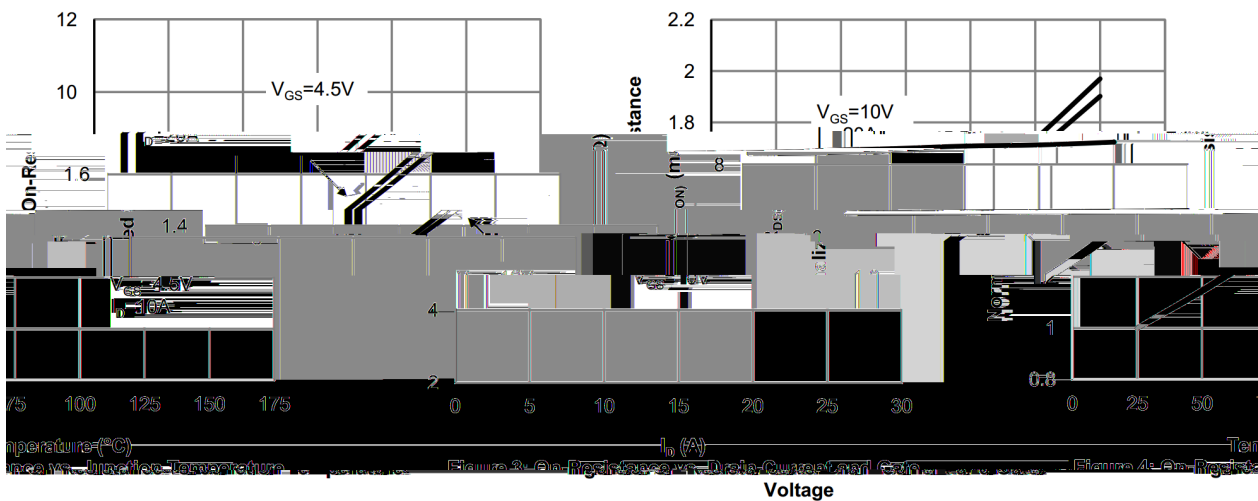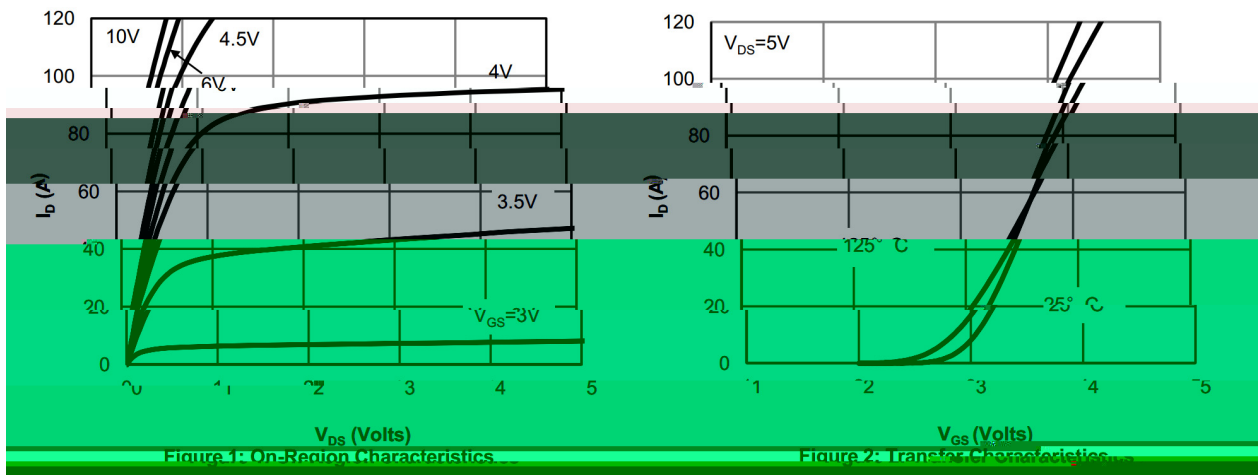


/ Electrical Characteristic Curve

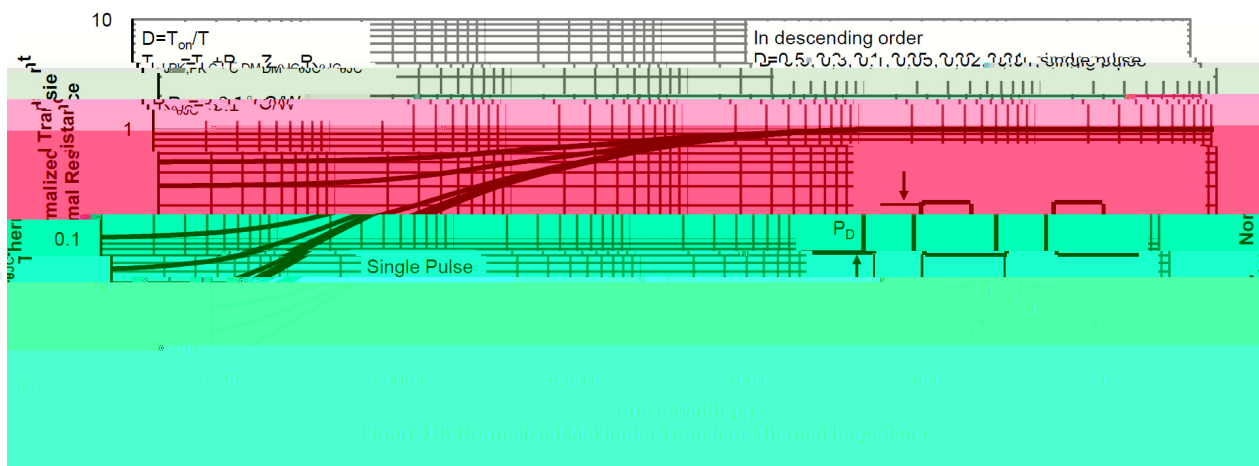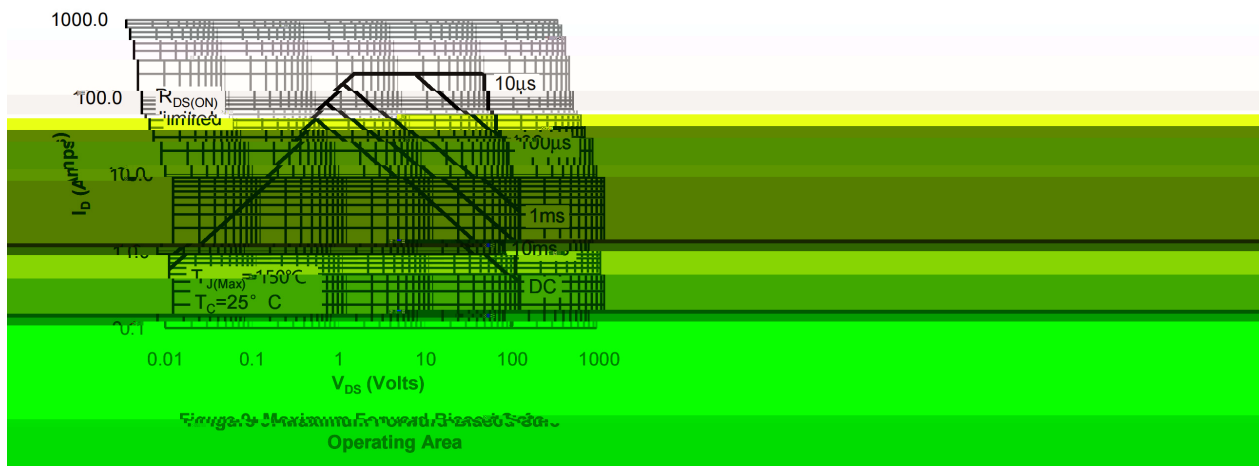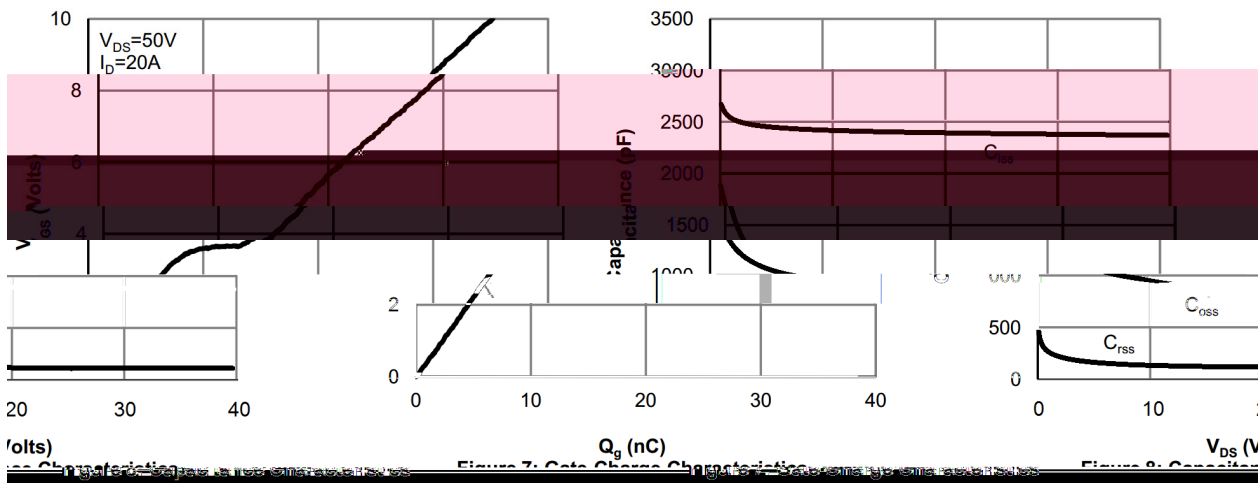

/ Package Dimensions

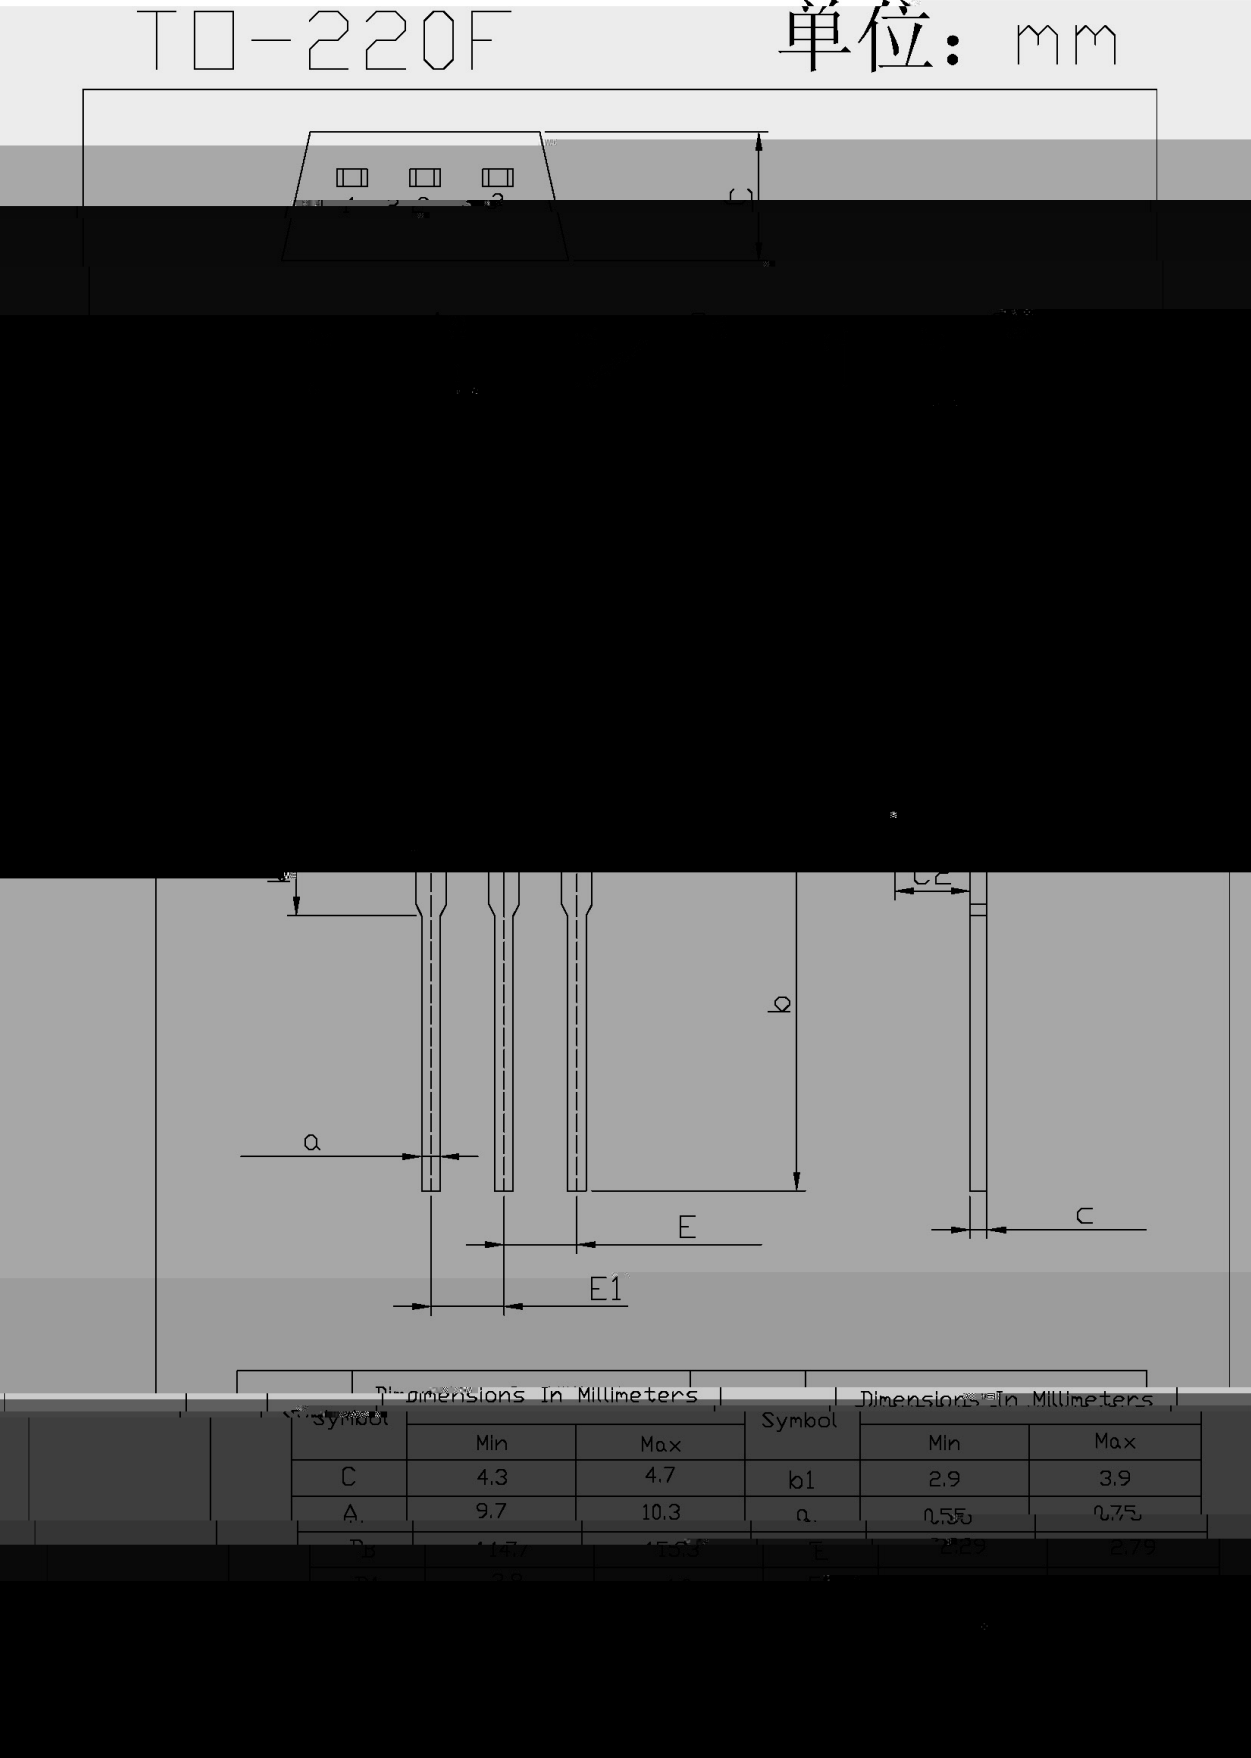

/ Marking Instructions

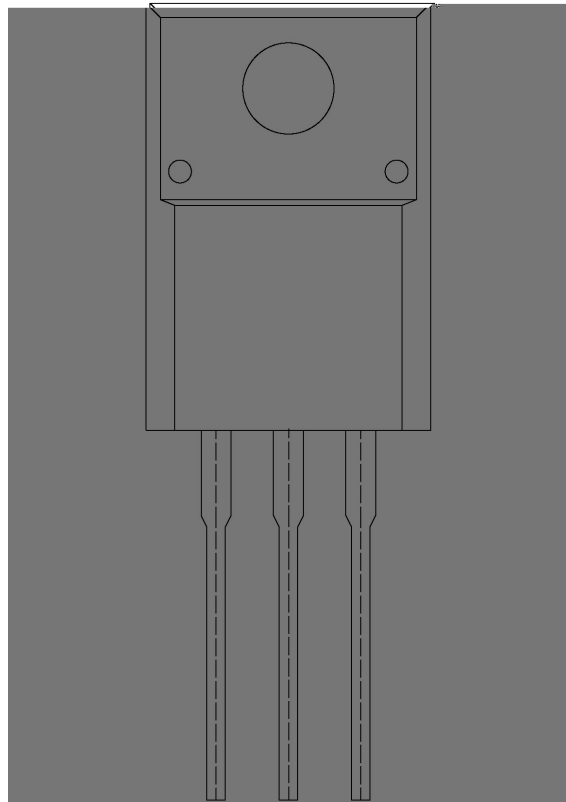

() / Temperature Profile for Dip Soldering(Pb-Free)
