

/ Descriptions

×


/ Features

$\leq$ Ω Ω


$\leq$ Ω Ω

/ Applications

/ Equivalent Circuit



/ Pinning

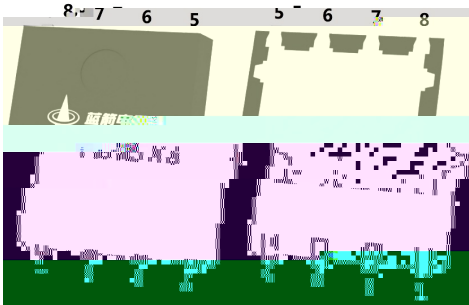

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking

/ Absolute Maximum Ratings(T_a=25)

			±	
	≤	θ		
		θ		
		θ		




/ Electrical Characteristics(T_a=25)

		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω




/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

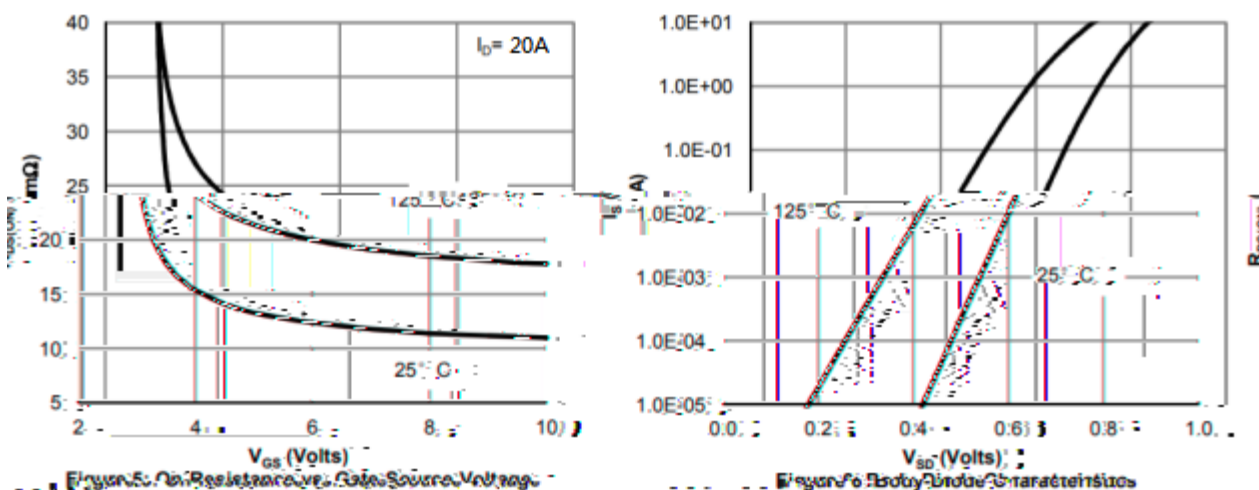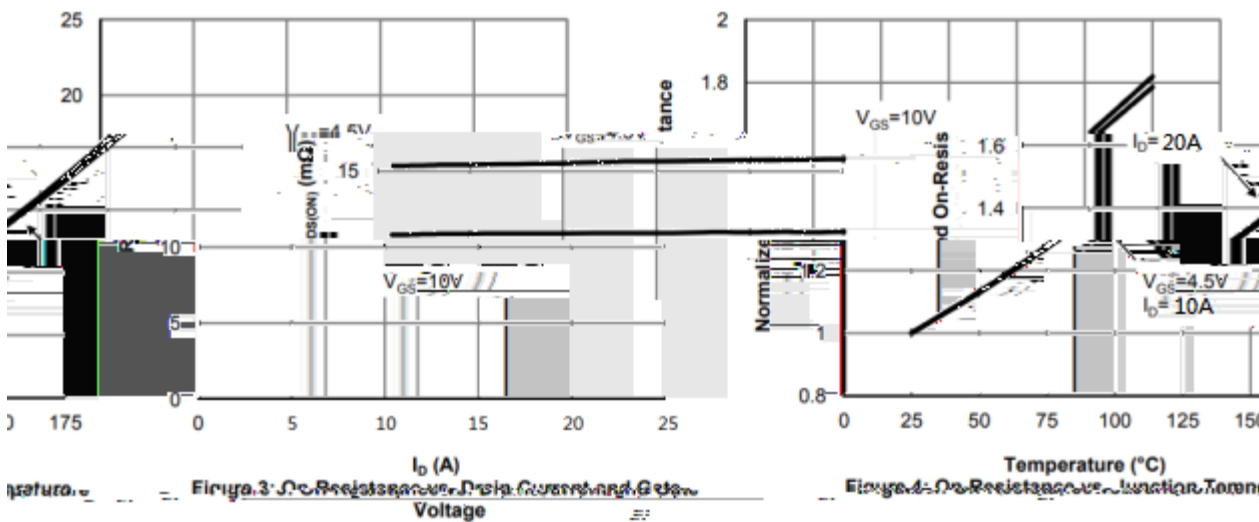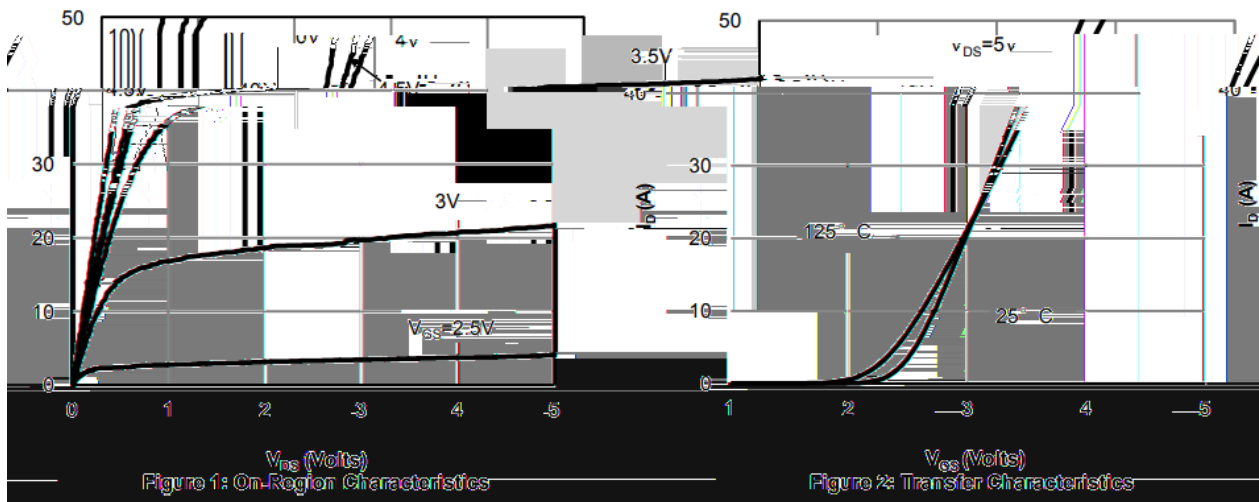


/ Electrical Characteristic Curve

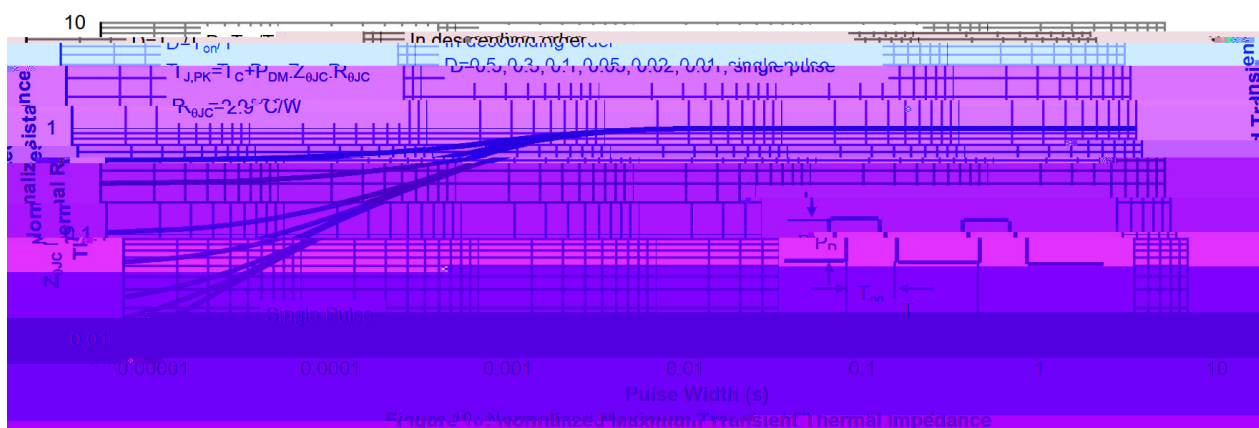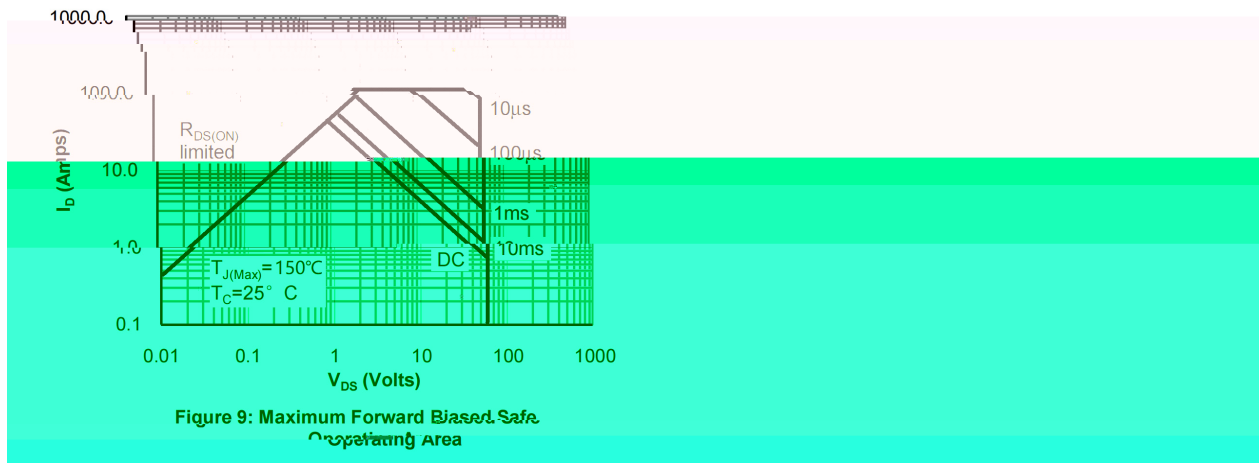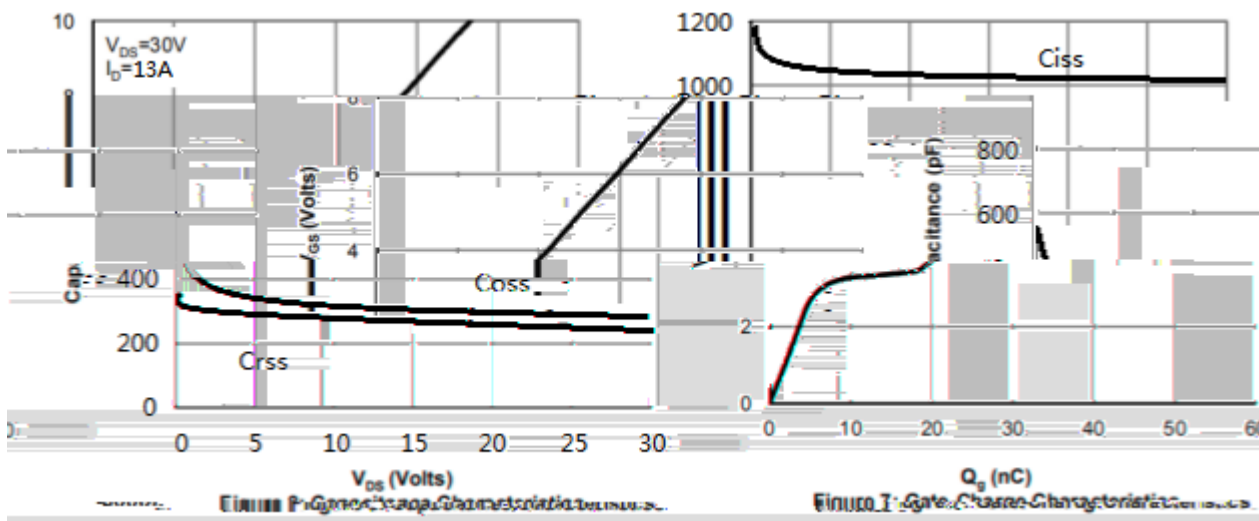

/ Package Dimensions

PDFN5 X6

Unit:mm

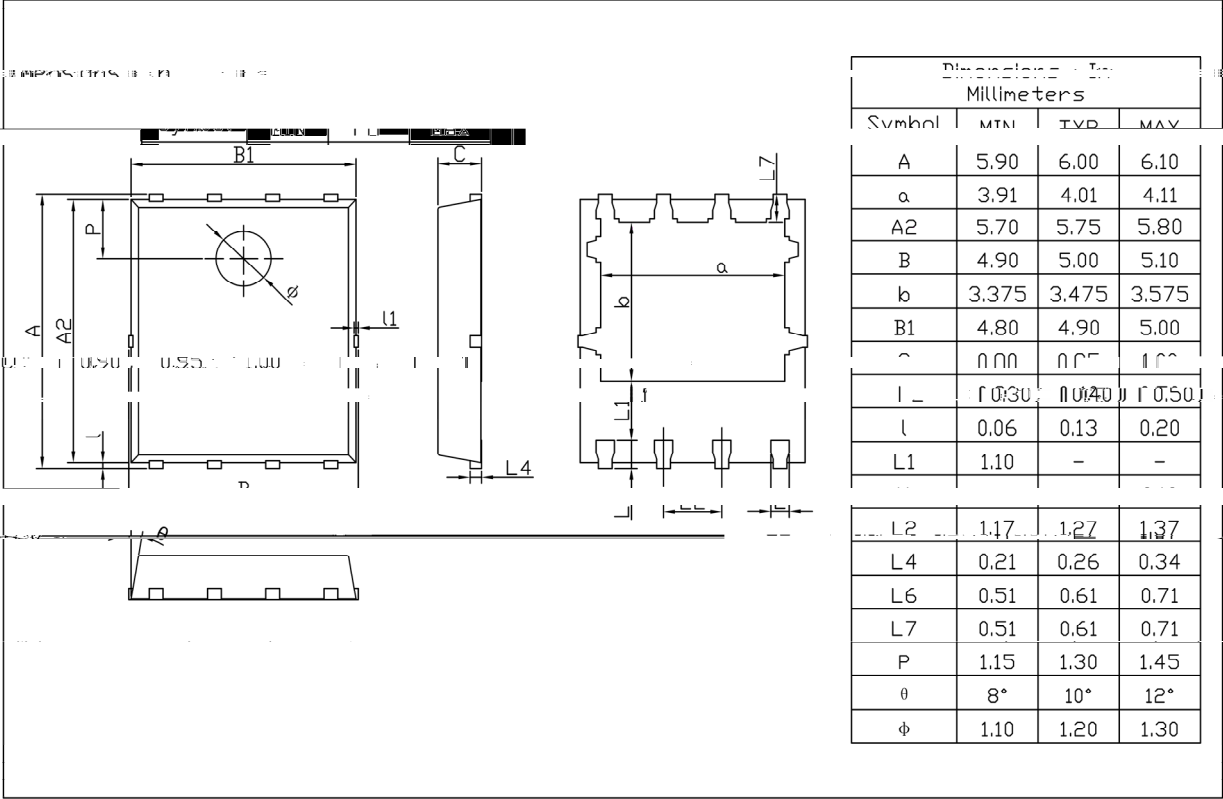


Rev.01 202209

/ Marking Instructions



() /

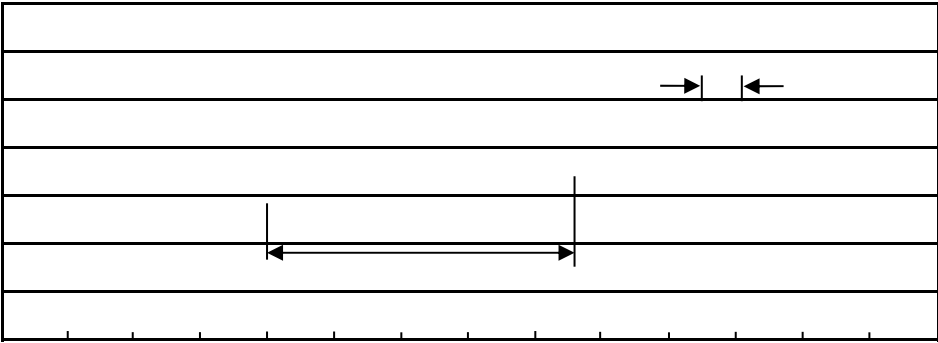

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box

/ Notices