
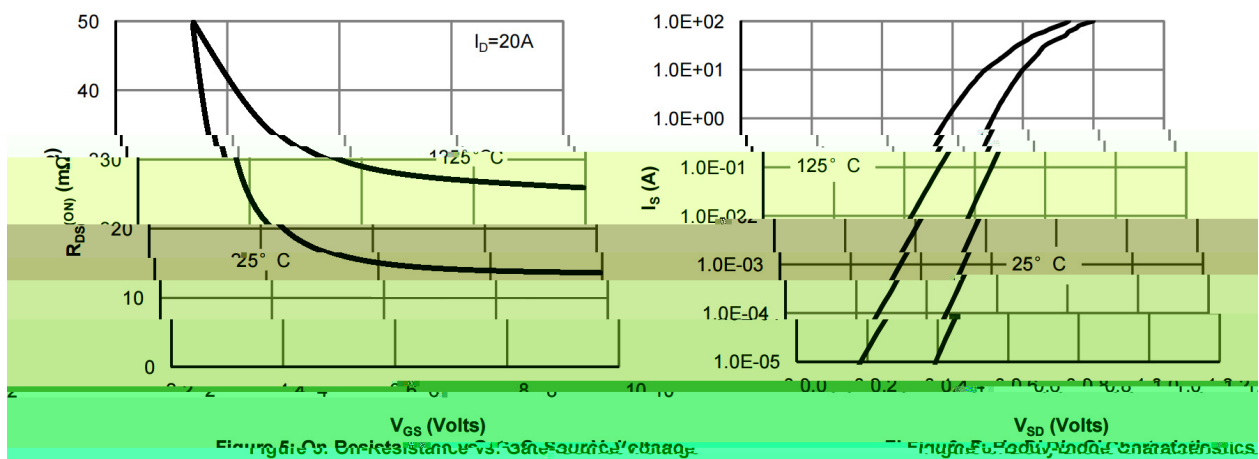
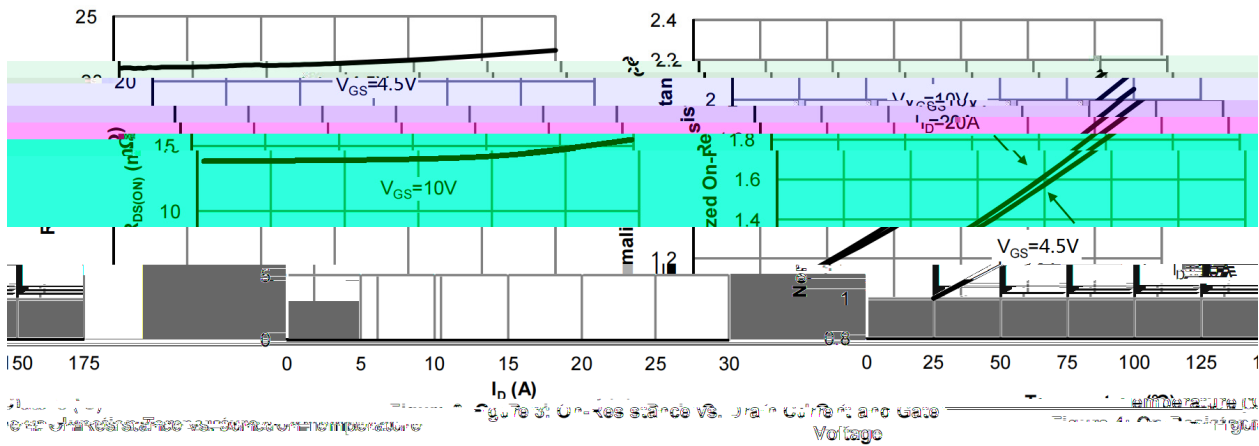


[illegible][illegible]

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

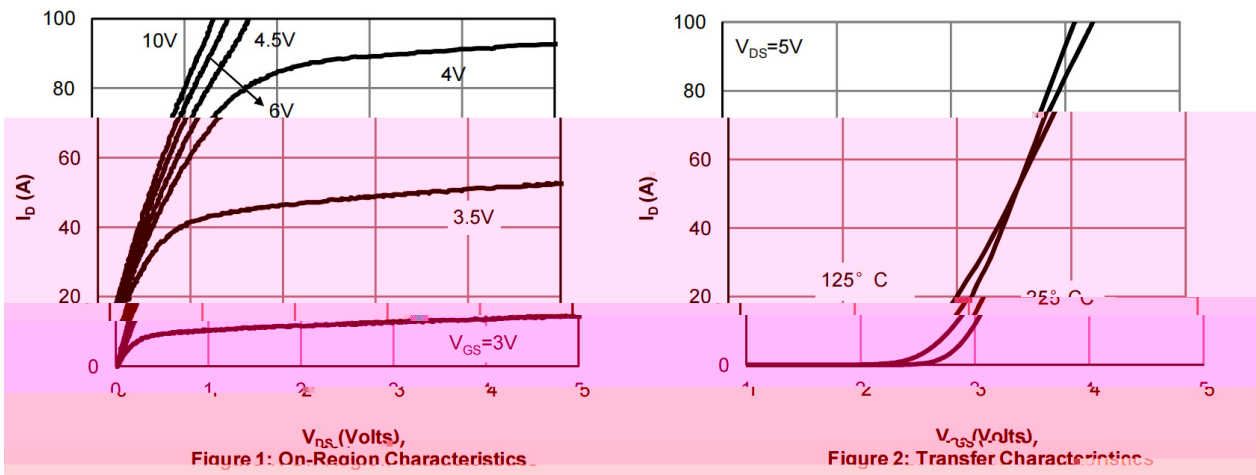

/ Electrical Characteristic Curve

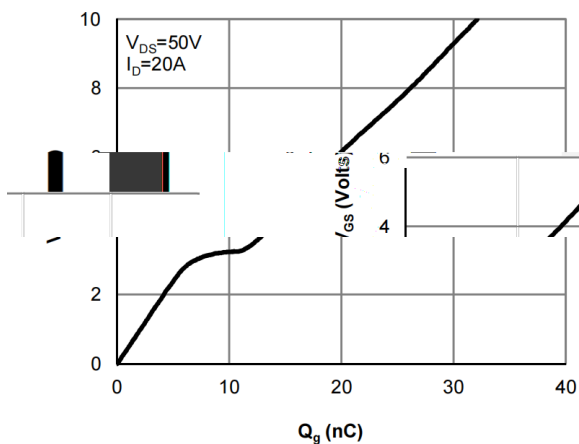


Figure 7: Gate-Charge Characteristics

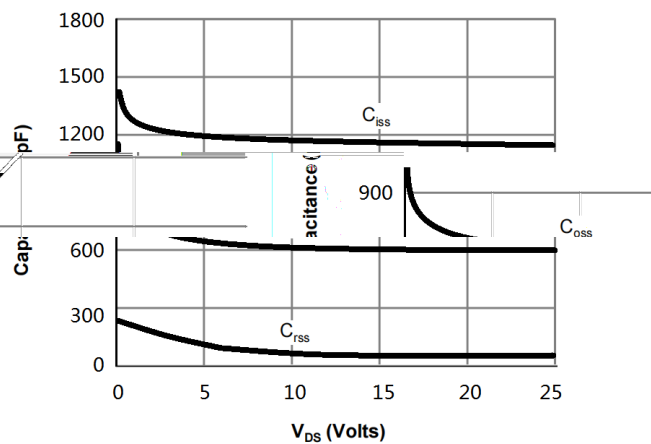


Figure 8: Capacitance Characteristics

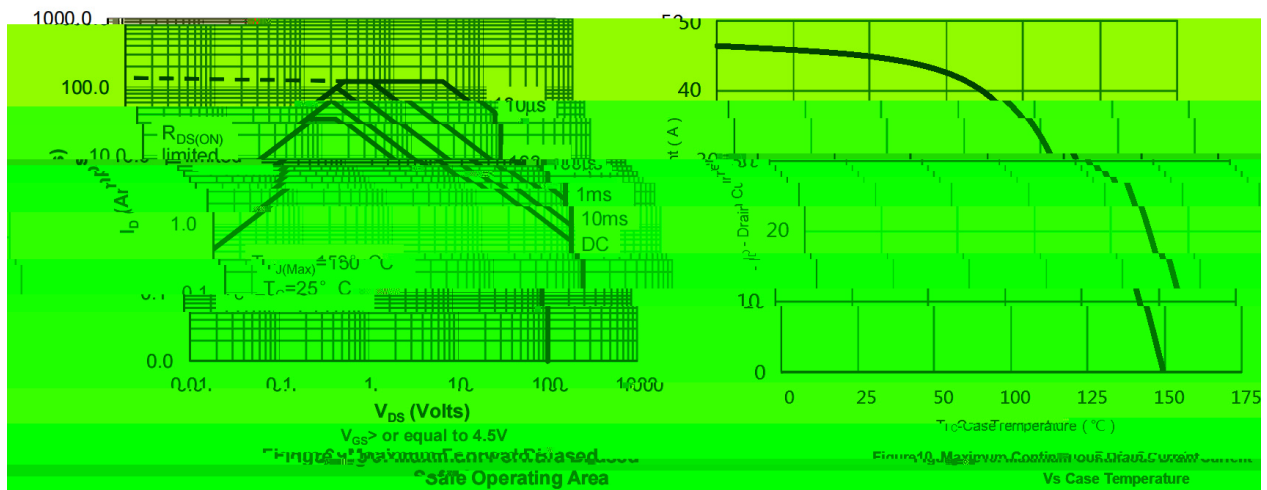


Figure 9: Safe Operating Area


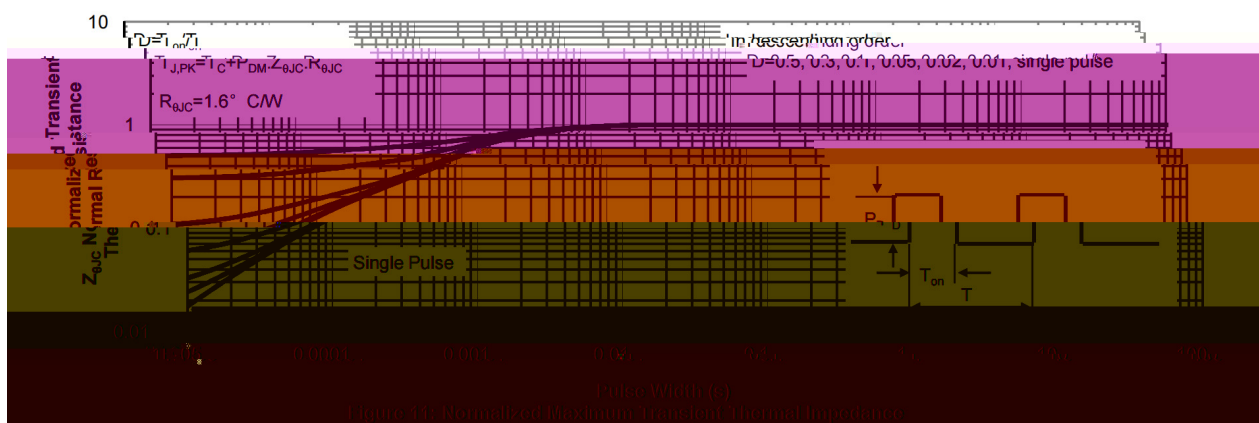


Figure 10: Normalized Maximum Allowed Power Dissipation

/ Package Dimensions




/ Marking Instructions



BR

Q

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

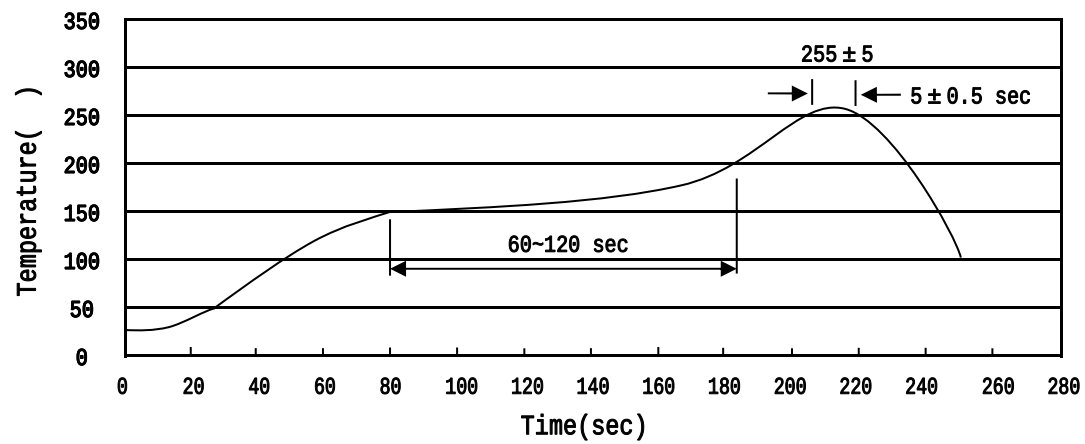 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$ $\pm$ $\pm$

/ Packaging SPEC.

	/	/	/	/	/			

/ Notices