
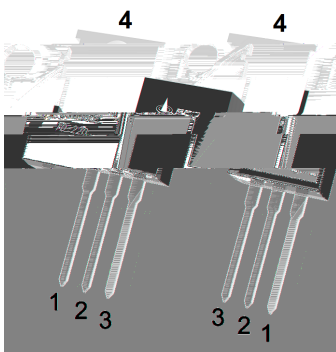


$$\begin{matrix} \leq & \Omega & \Omega \\ \leq & \Omega & \Omega \end{matrix}$$

LED




|  |   |   |  |  |
|--|---|---|--|--|
|  |   |   |  |  |
|  |   |   |  |  |
|  |   | ℃ |  |  |
|  |   |   |  |  |
|  |   |   |  |  |
|  |   |   |  |  |
|  |   | ℃ |  |  |
|  |   |   |  |  |
|  | ≤ | θ |  |  |
|  |   |   |  |  |
|  |   |   |  |  |

|  |  |   |  |  |  |   |
|--|--|---|--|--|--|---|
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  | μ |
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

Ω



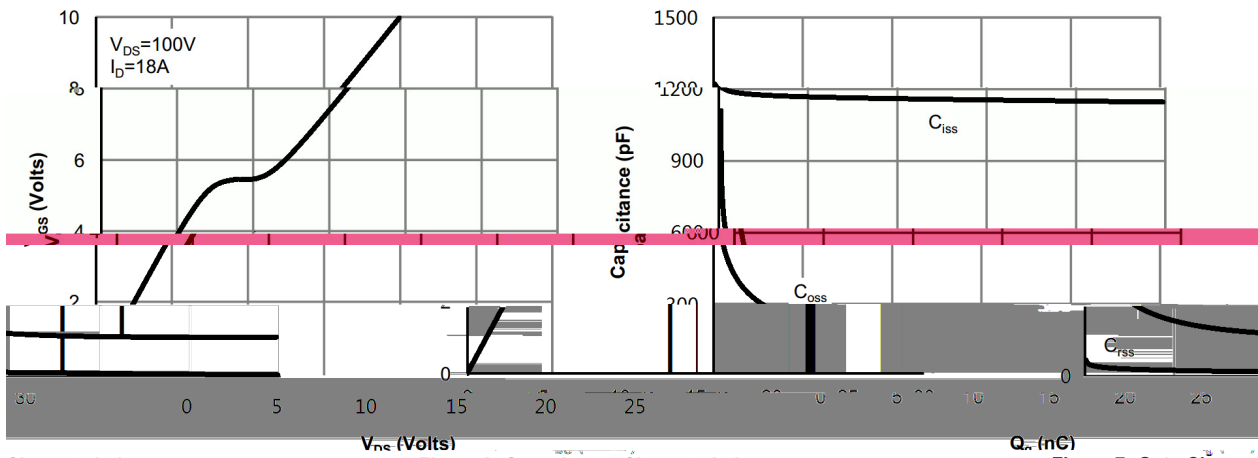

Characteristics

Figure 8: Capacitance Characteristics

Figure 7: Gate-Charge

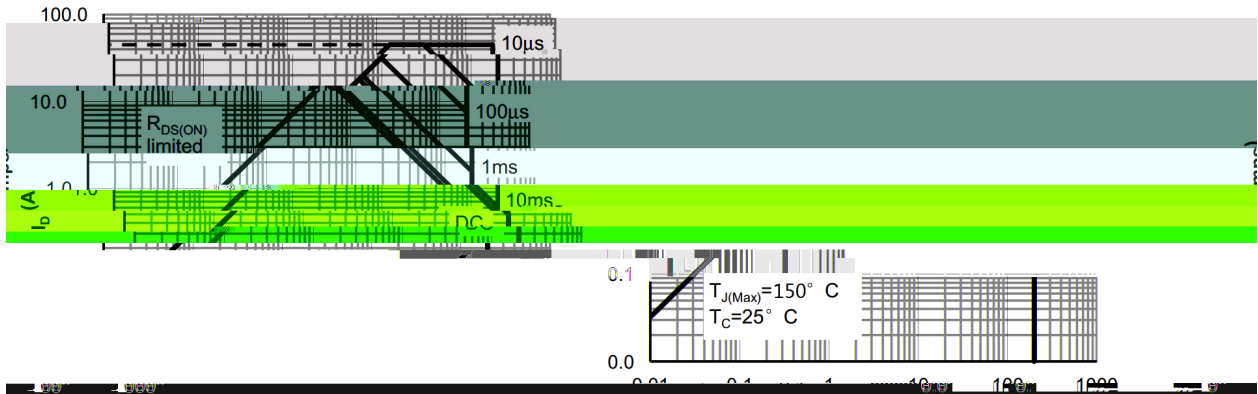


Figure 9: Maximum Forward Bias





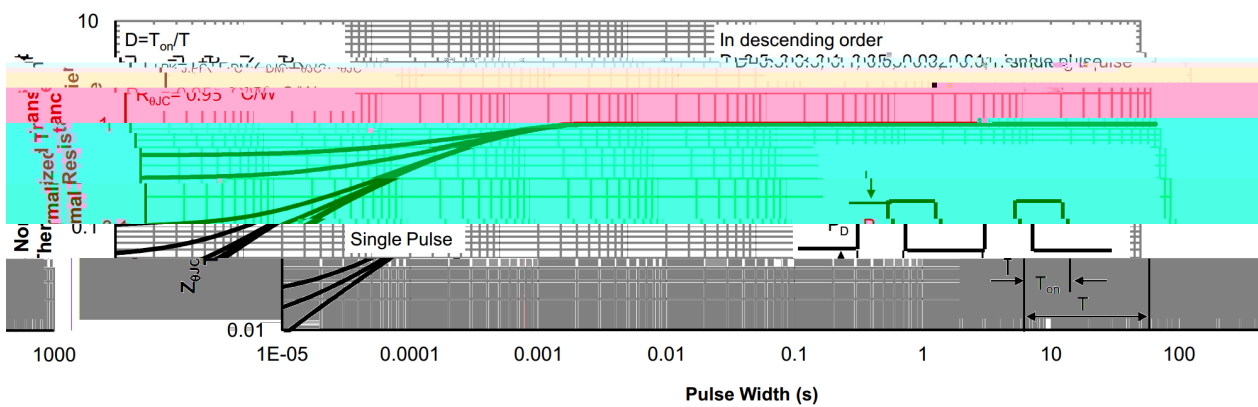



Figure 10: Normalized Maximum Transient Thermal Impedance

单位: mm

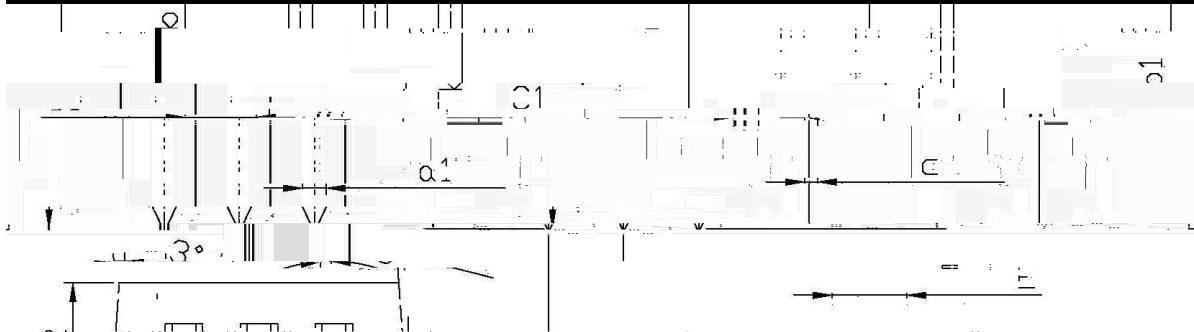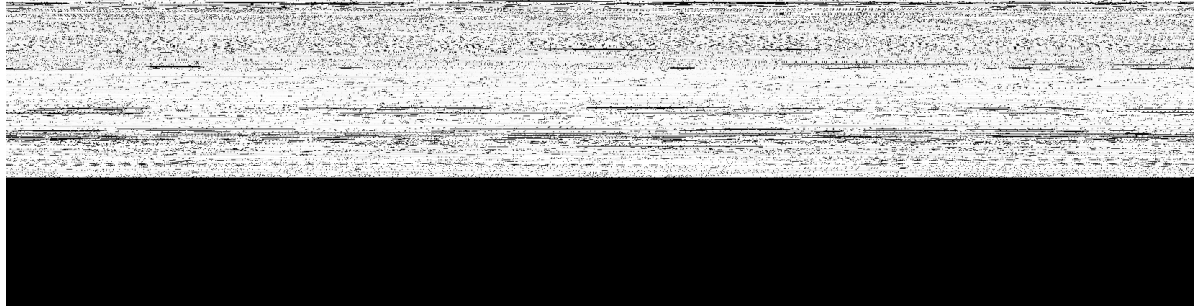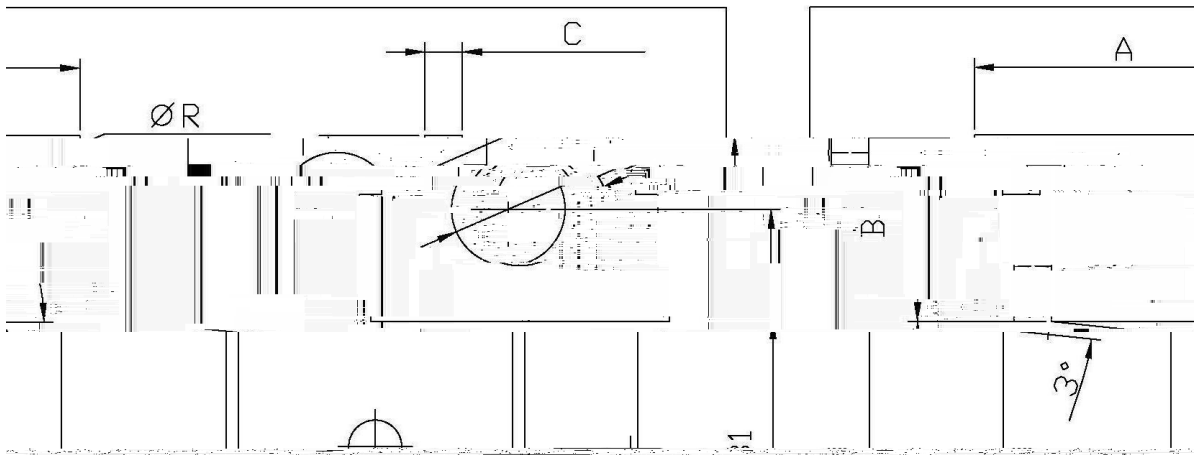

| Dimensions In Millimeters |     |      | Dimensions In Millimeters |      |      |
|---------------------------|-----|------|---------------------------|------|------|
| Symbol                    | Min | Max  | Symbol                    | Min  | Max  |
| Δ                         | 9.8 | 10.2 | C                         | 1.2  | 1.4  |
| 3                         | 6.7 |      | R                         | 3.56 | 3.64 |




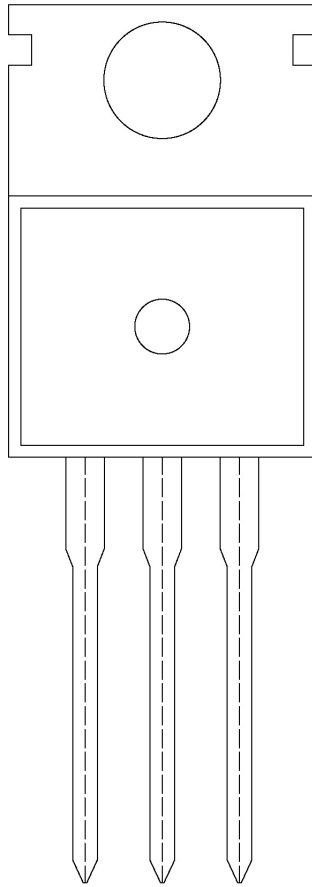

BR

18N20

\*\*\*\*

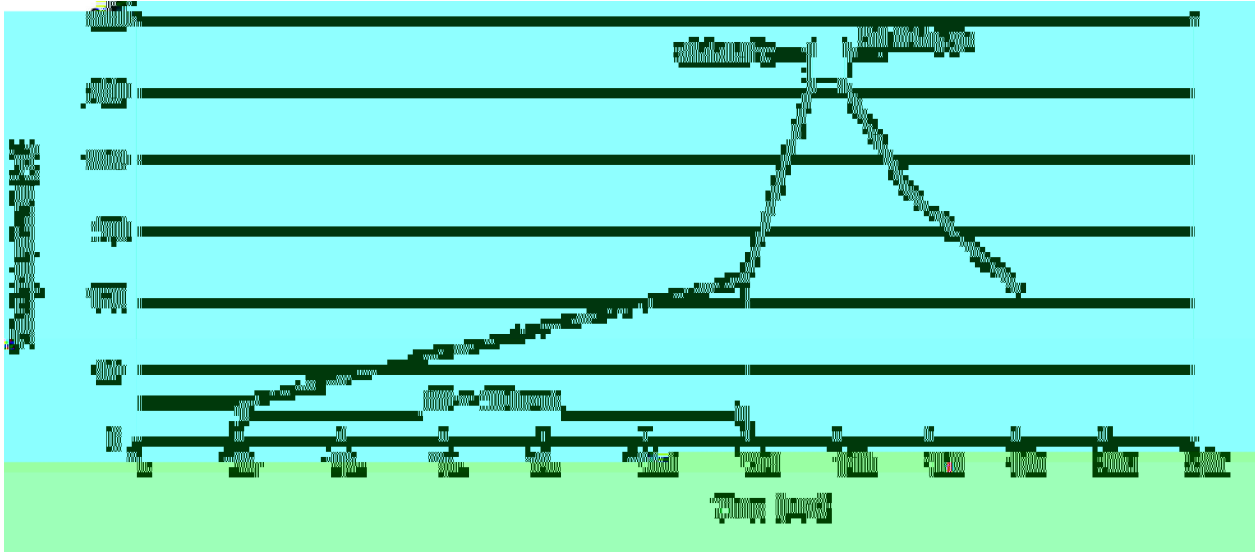

±

±

±

±

±

±

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |