

Rev.A Jan.-2025

SOT-23 P



P- CHANNEL MOSFET in a SOT-23 Plastic Package.

AEC-Q101

Ultra Low on-resistance. fast switching. Low on voltage, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

PWM

PWM application & Load switch, Meet the stringent requirements of automotive applications.


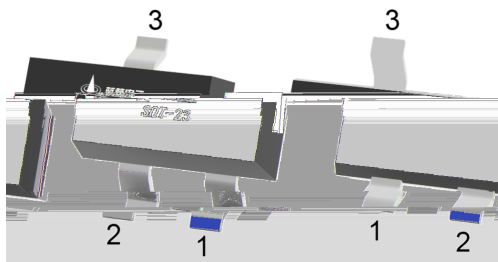






PIN1 G PIN 2 S PIN 3 D

See Marking Instructions.

Parameter		Symbol	Rating	Unit
Drain–Source Voltage		V_{DS}	-60	V
Gate–Body Leakage Voltage		V_{GSS}	± 20	V
Drain Current – Continuous		I_D	-2.3	A
Pulsed Drain Current		I_{DM}	-9	A
Power Dissipation		P_D	1.25	W
Operating and Storage Temperature Range		T_J, T_{STG}	-55 150	
Maximum Junction-to-Ambient	t 10s	R_{JA}	72	/W
Maximum Junction-to-Ambient	Steady-State		100	/W
Maximum Junction-to-Lead	Steady-State	R_{JL}	64	/W


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain–Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V$ $I_D=-250$ A	-60	-75		V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=-250$ A	-1	-1.9	-2.5	V
Static Drain–Source On–Resistance	$R_{DS(on)}$	$V_{GS}=-10V$ $I_D=-2A$		135	150	m
		$V_{GS}=-4.5V$ $I_D=-1A$		160	200	m
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-60V$ $V_{GS}=0V$			-1.0	A
Gate-Body leakage current	I_{GSS}	$V_{GS}=\pm 20V$ $V_{DS}=0V$			± 100	nA
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_S=-1A$ $T_J=25$			-1.2	V
Gate resistance	R_g	f=1MHz		6.5		
Input Capacitance	C_{iss}	$V_{DS}=-25V$ $V_{GS}=0V$ $f=1.0MHz$		800		pF
Output Capacitance	C_{oss}			45		
Reverse Transfer Capacitance	C_{rss}			35		
Total Gate Charge	$Q_{g(-10V)}$	$V_{DS}=-10V$ $V_{GS}=-10.0V$ $I_D=-2A$		12.3		nC
Total Gate Charge	$Q_{g(-4.5V)}$			6.3		
Gate-to-Source Charge	Q_{gs}			1.6		
Gate-to-Drain Charge	Q_{gd}			2.4		
Turn–On Delay Time	$t_{d(on)}$	$V_{DS}=-10V$ $V_{GS}=-10V$ $R_L=5.4$ $R_{GEN}=3$		12		ns
Turn–On Rise Time	t_r			20		
Turn–Off Delay Time	$t_{d(off)}$			20		
Turn–Off Fall Time	t_f			25		

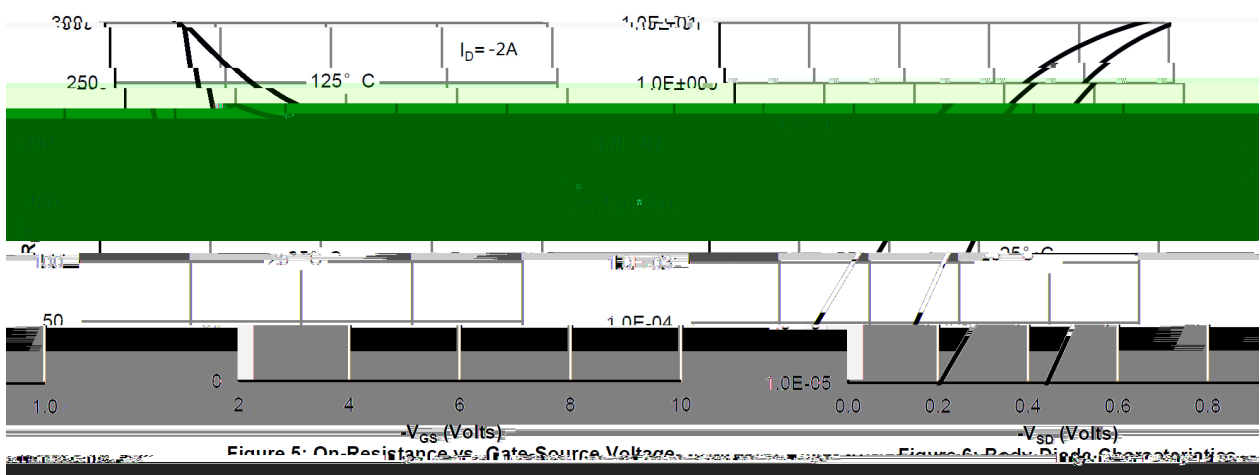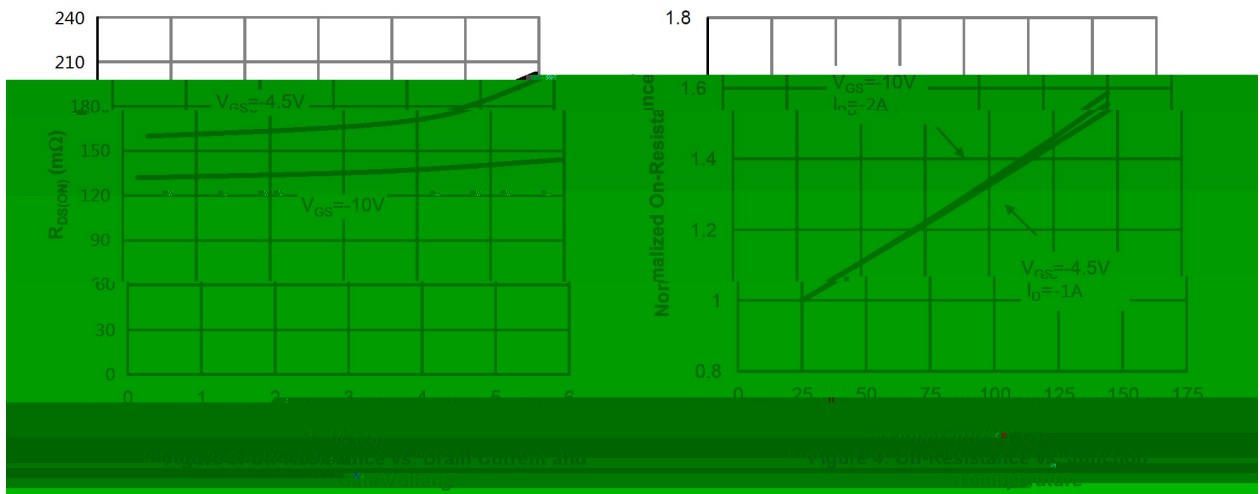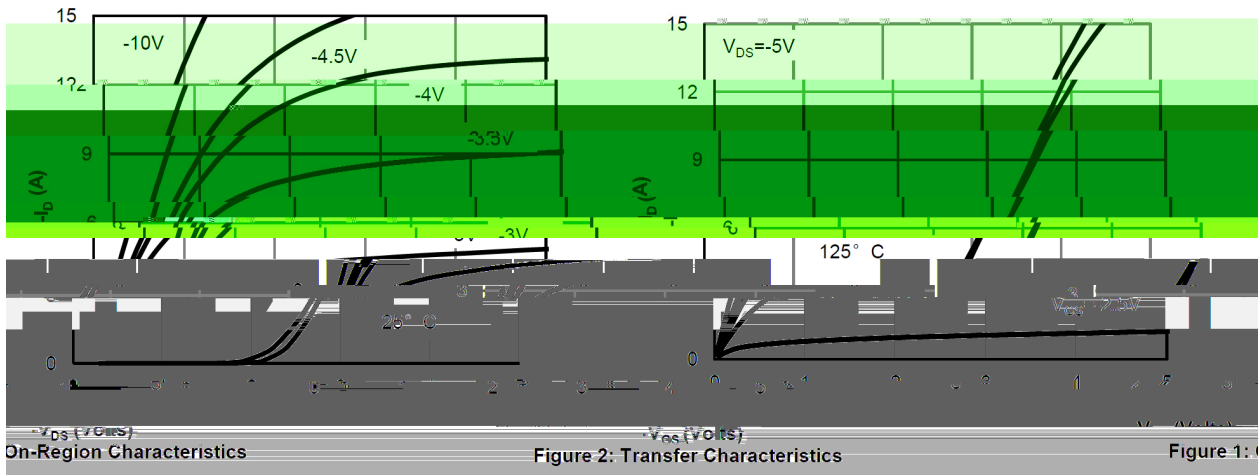

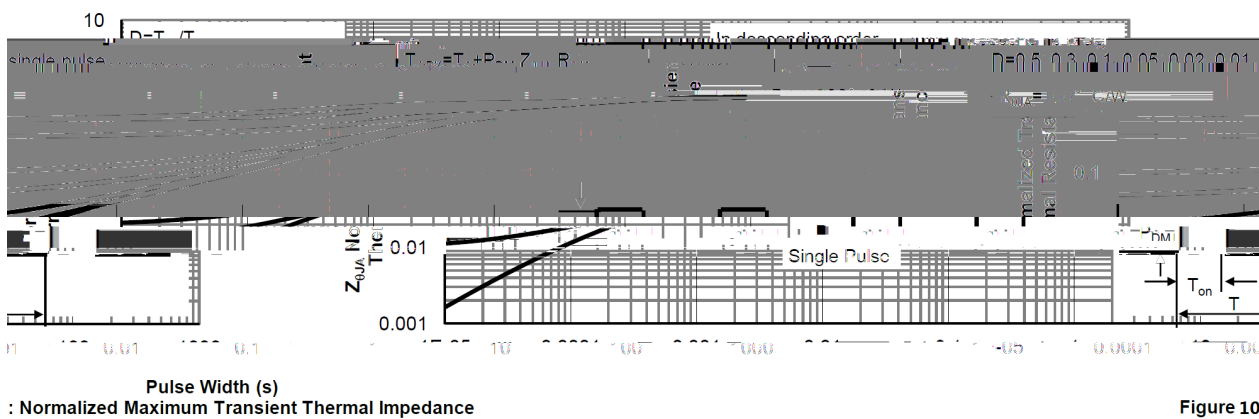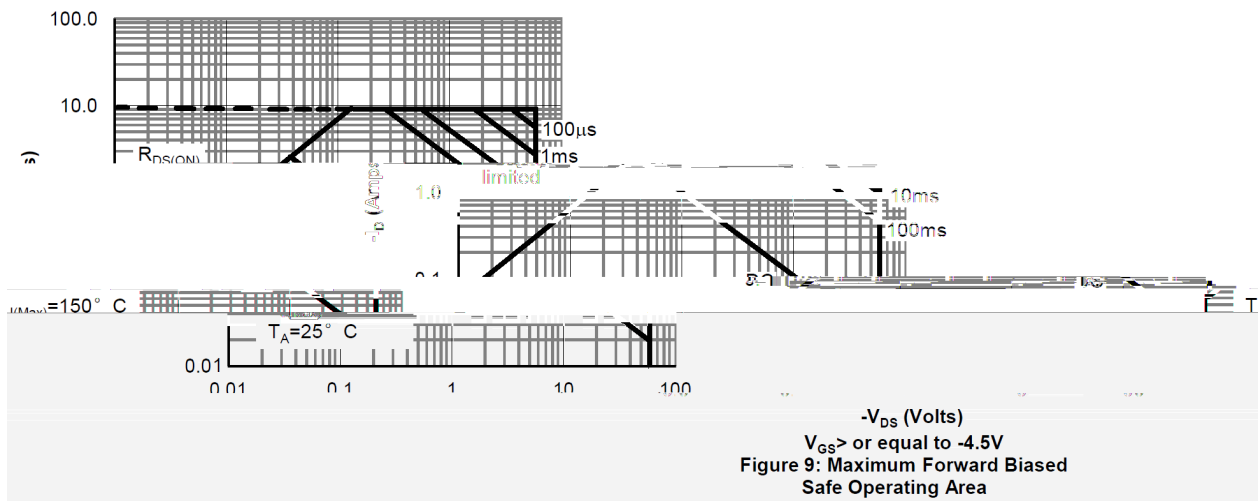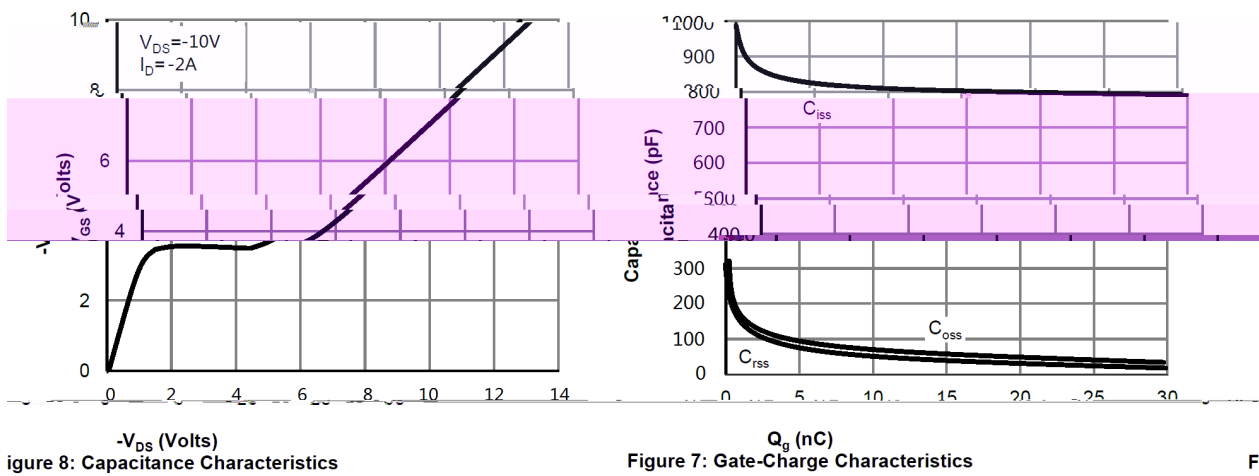

SOT-23

单位: mm

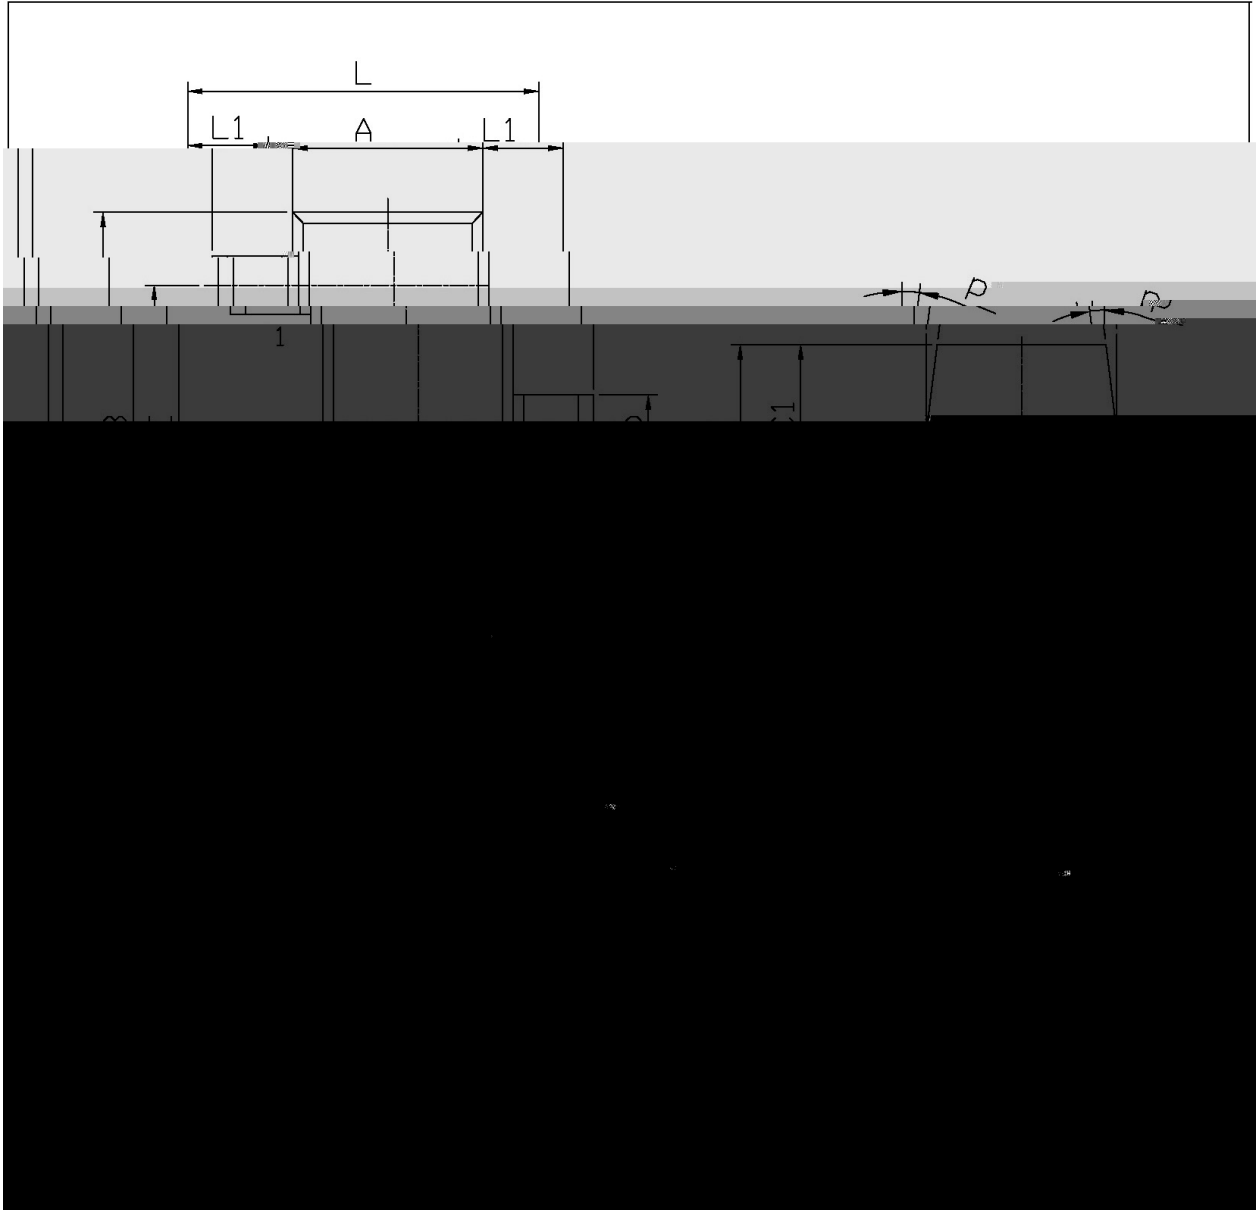




Q
2P6

Note:

Q: Automobile halogen-free product Code

2P6: Product Type Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

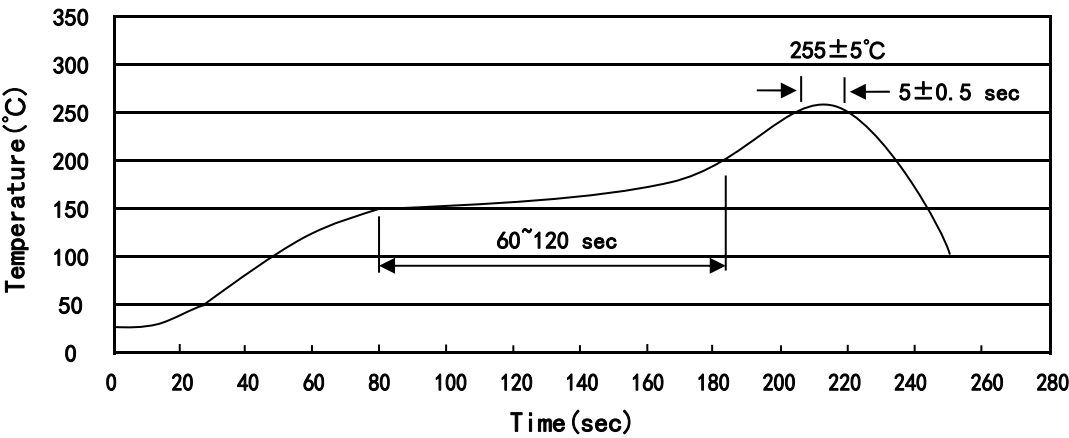

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type 7~ E	Units ;>û H					Dimension ;>û p . (unit Åmm³)		
	Units/Reel /-	Reels/Inner Box -- /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Reel	Inner Box	Outer Boxç
SOT-23	3,000	10	30,000	4	120,000	7" ×8	210×205×205	445×435×230