
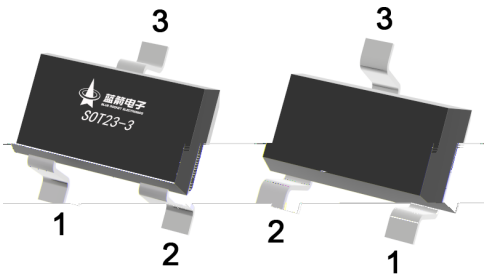


P

±

Ω




Ω



--	--

		±	
			°
			°
	θ		°

		μ				
					±	
		μ				
						Ω
		ΩΩ				
						nC

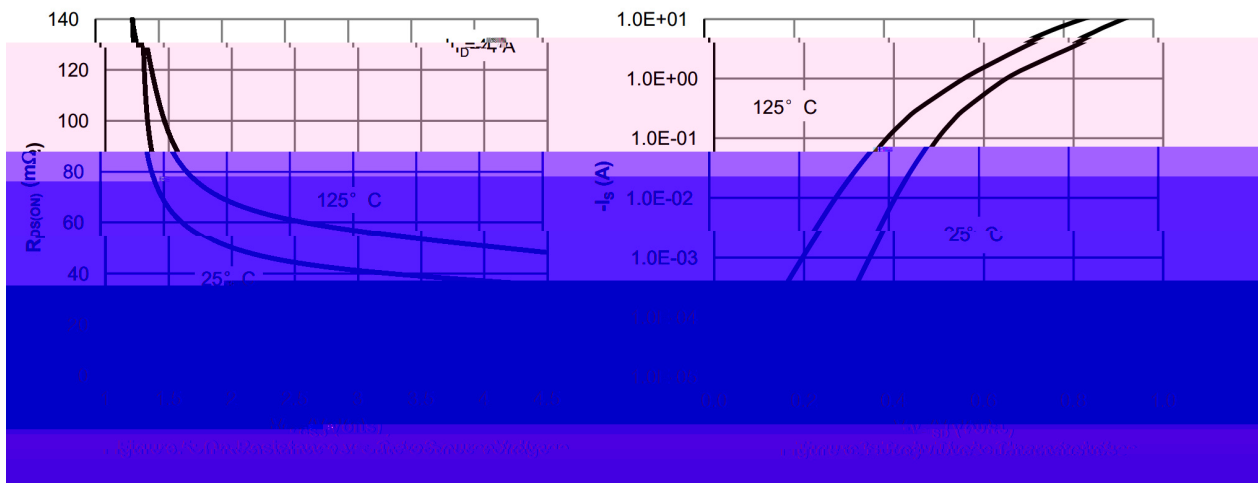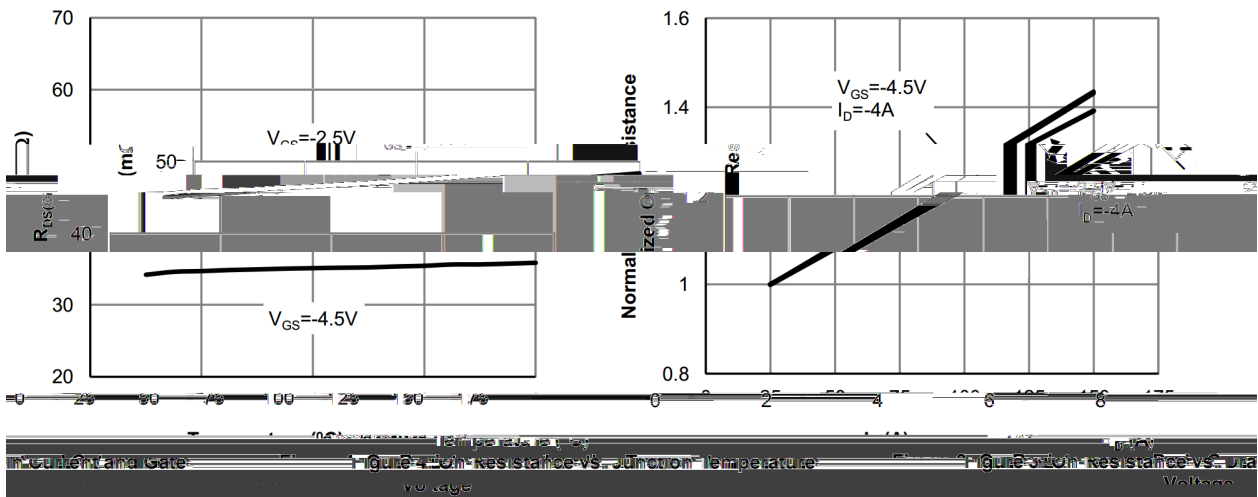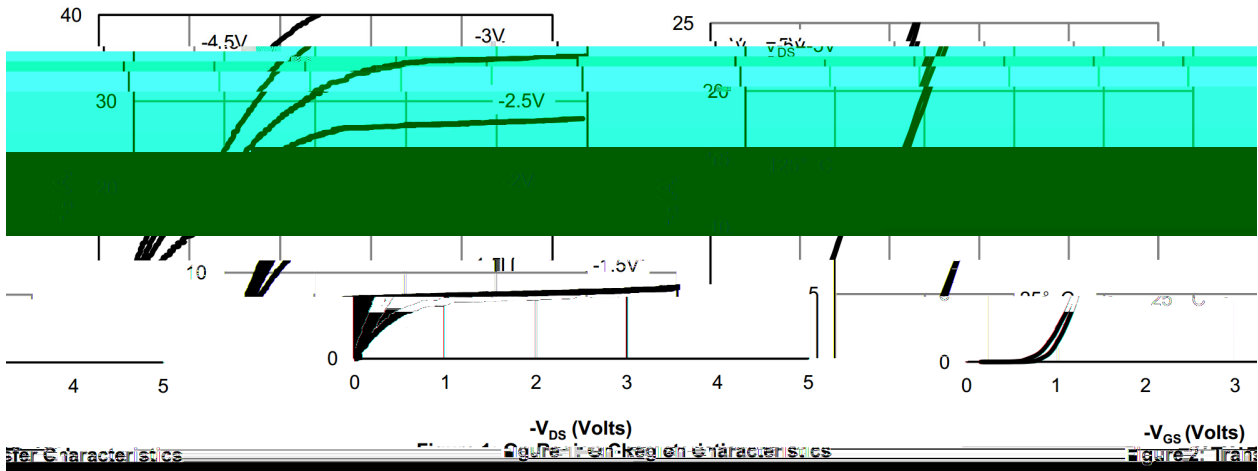



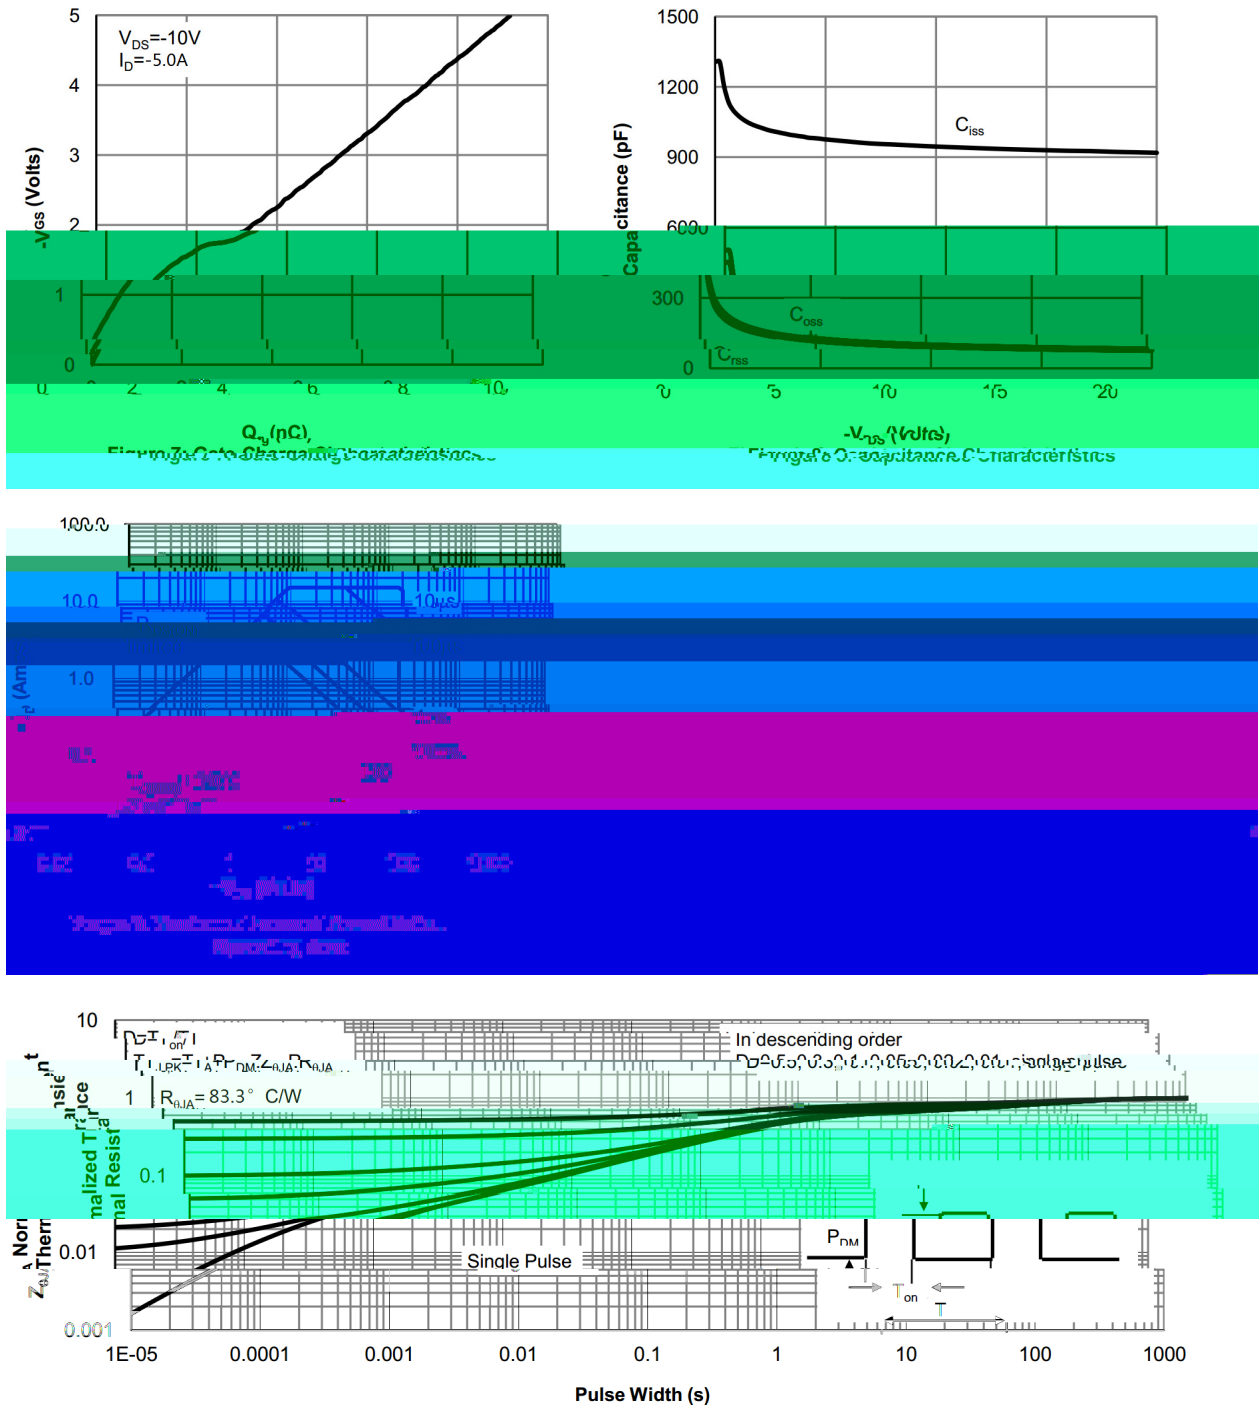



Figure 10: Normalized Maximum Transient Thermal Impedance

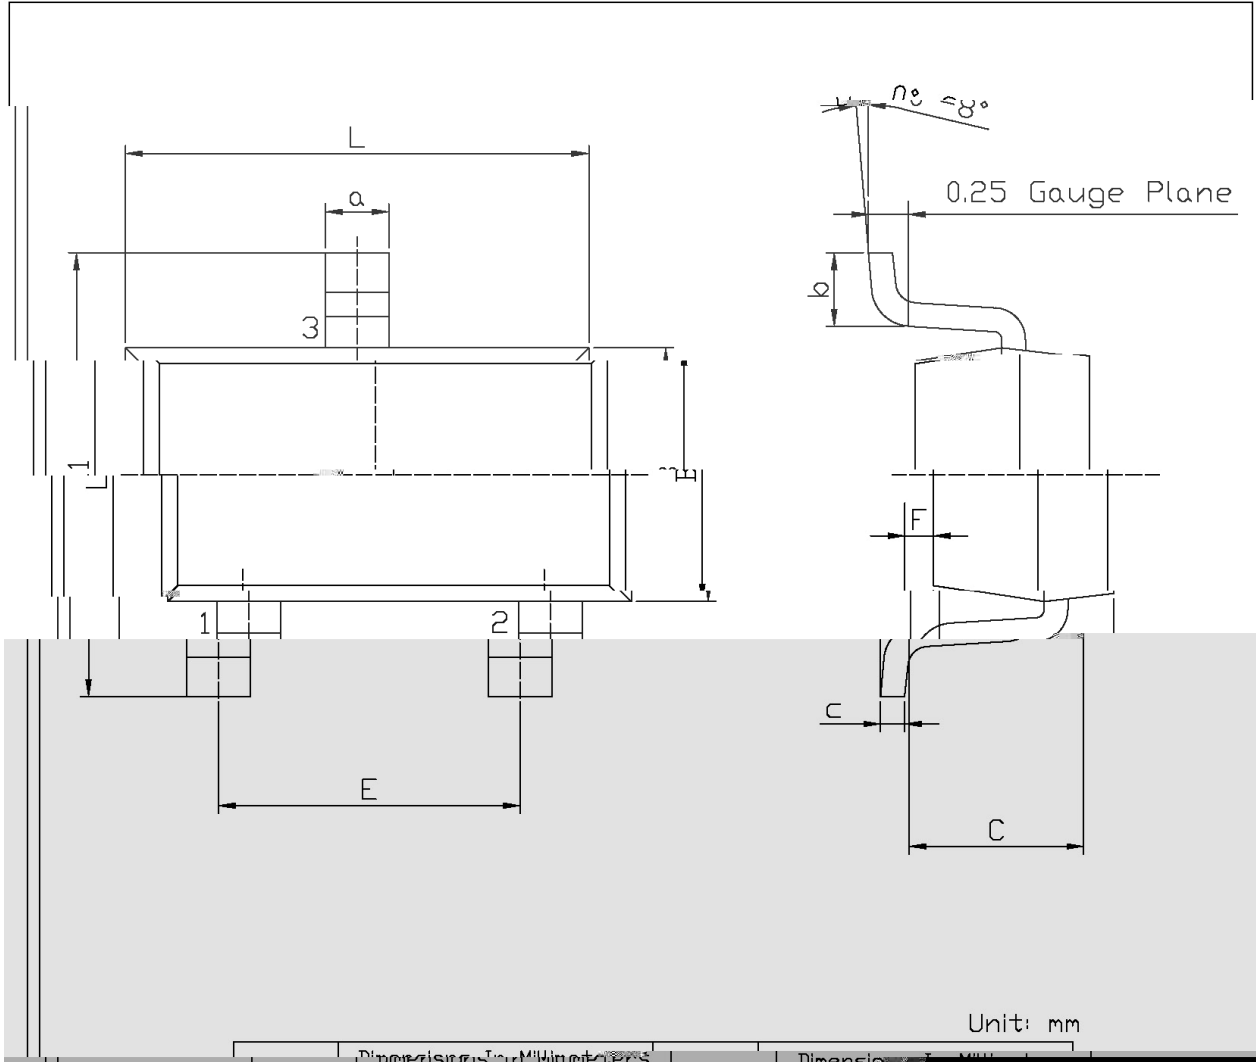

Dimensions in Millimeters		Dimensions in Millimeters		Dimensions in Millimeters	
L	2.82	a	2.00	b	0.25
B	1.50	C	1.70	C	0.10
					0.20

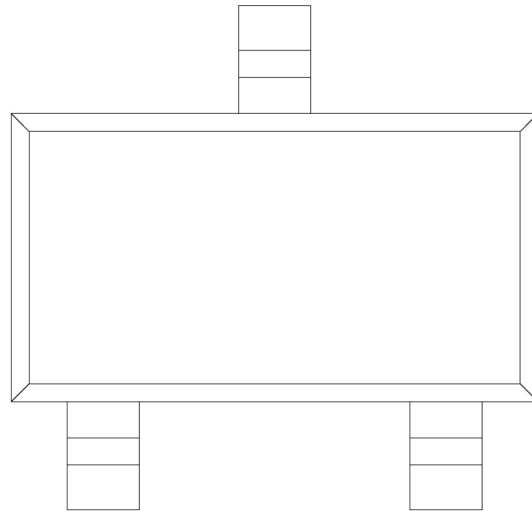

Temperature Profile for IR Reflow Soldering(Pb-Free)

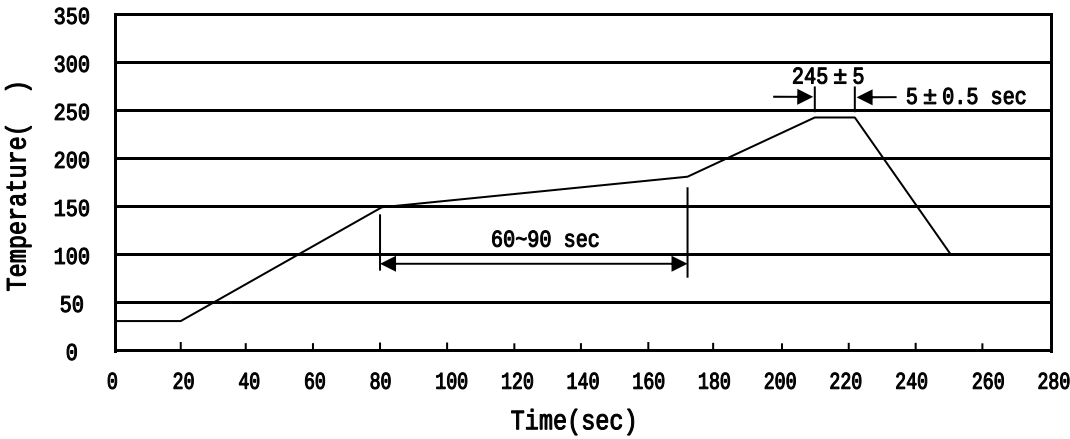

± ± ± ±

± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box