


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

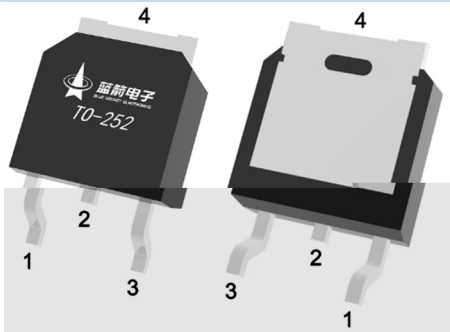

/ Marking


/ Absolute Maximum Ratings(Ta=25)

	θ		/W
	θ		/W


/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
		μ				
						Ω
		Ω				

/ Electrical Characteristic Curve

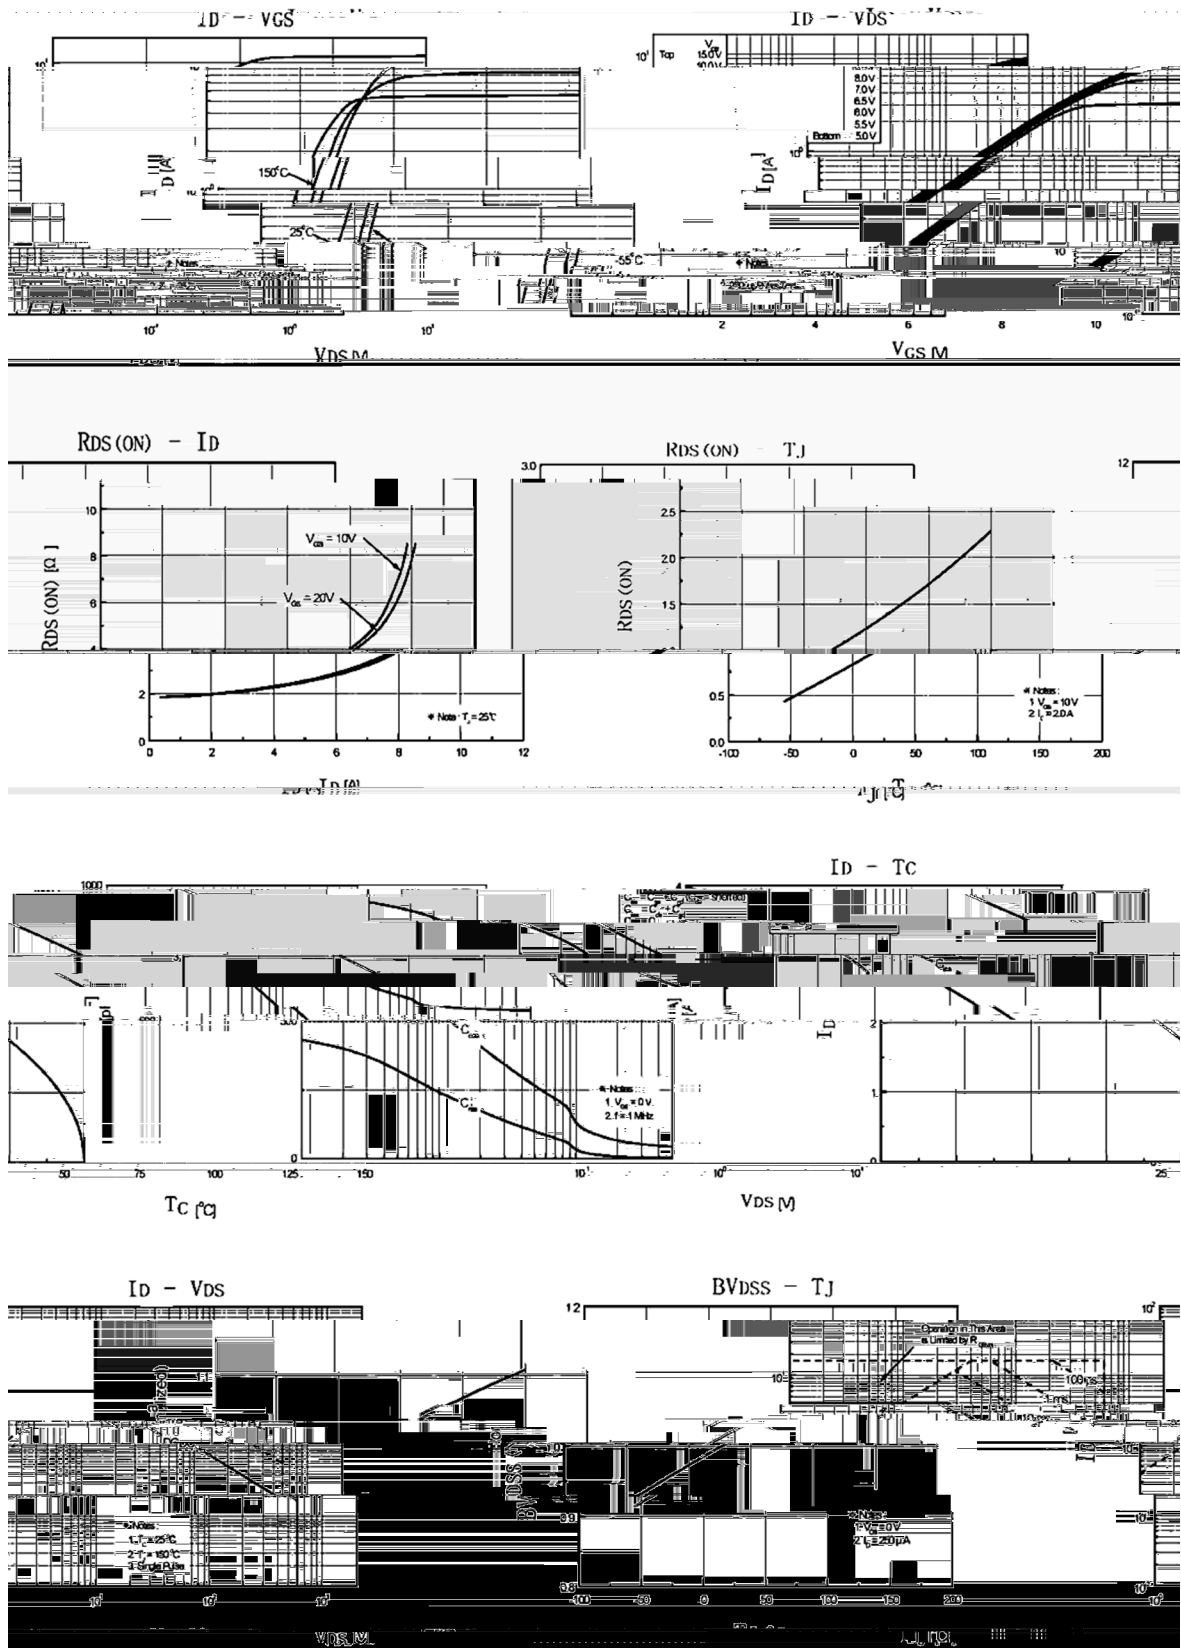

/ Package Dimensions

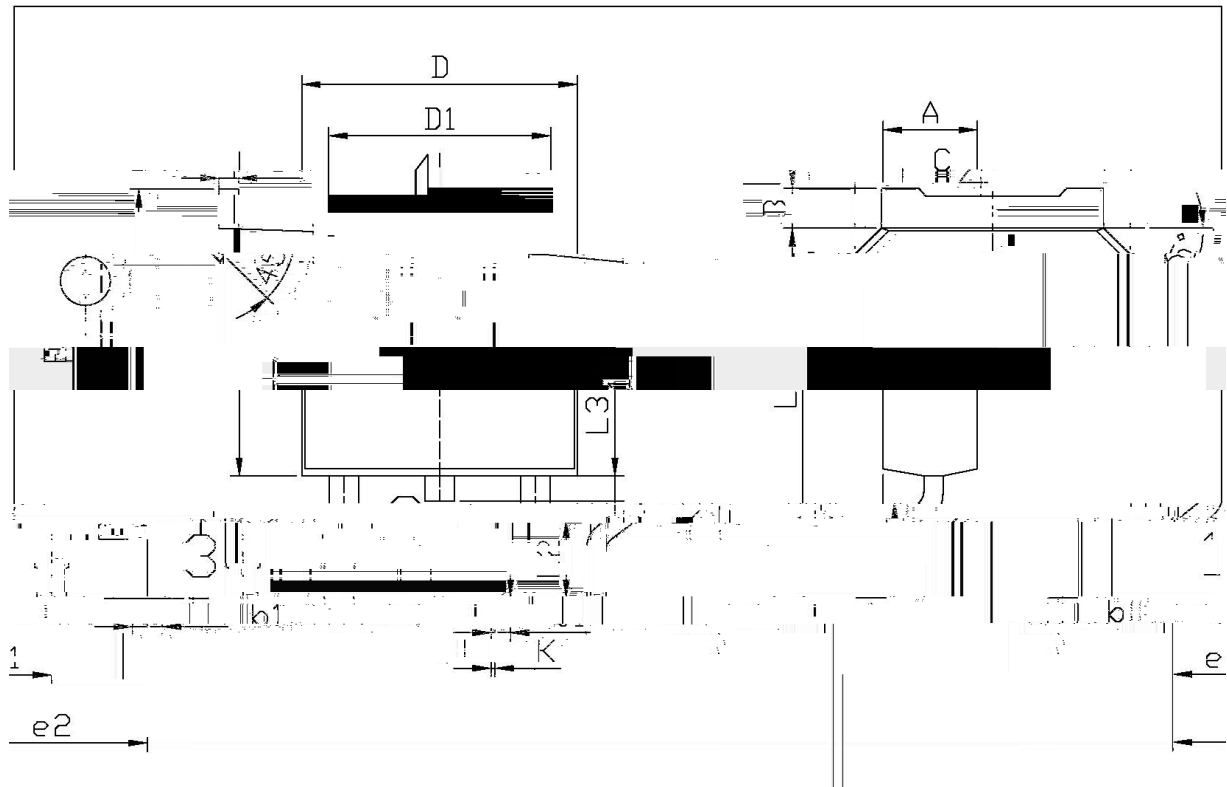


单位：mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
F	5.05	6.25	A	5.20	2.40
B	0.95	1.25	e1	2.24	2.34
b	0.70	0.80	e2	4.13	4.73
b1	0.45	0.55	L1	9.85	10.35
C	0.45	0.55	L2	1.70	2.00
D	6.45	6.75	L3	0.60	0.90
e	5.10	5.50	K		

T0-252

/ Marking Instructions

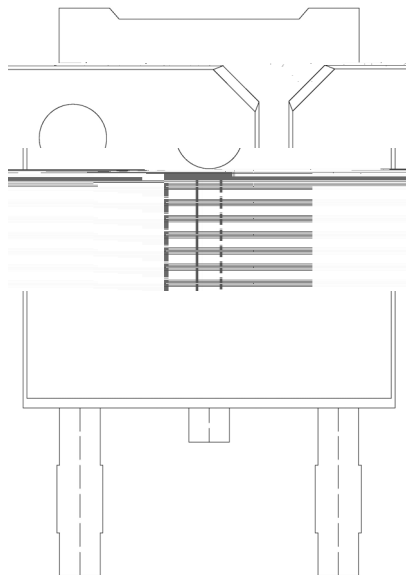

4N65

() / Temperature Profile for IR Reflow Soldering(Pb-Free)



± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices