

/ Revised record

[illegible]

/ Descriptions

/ Features


$R_{DS(on)}$

C_{rss}


/ Applications

DC/DC

/ Equivalent Circuit



/ Pinning



/ Marking


	°C		
	°C		
			°C
			°C
			°C

		°C				




°C

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

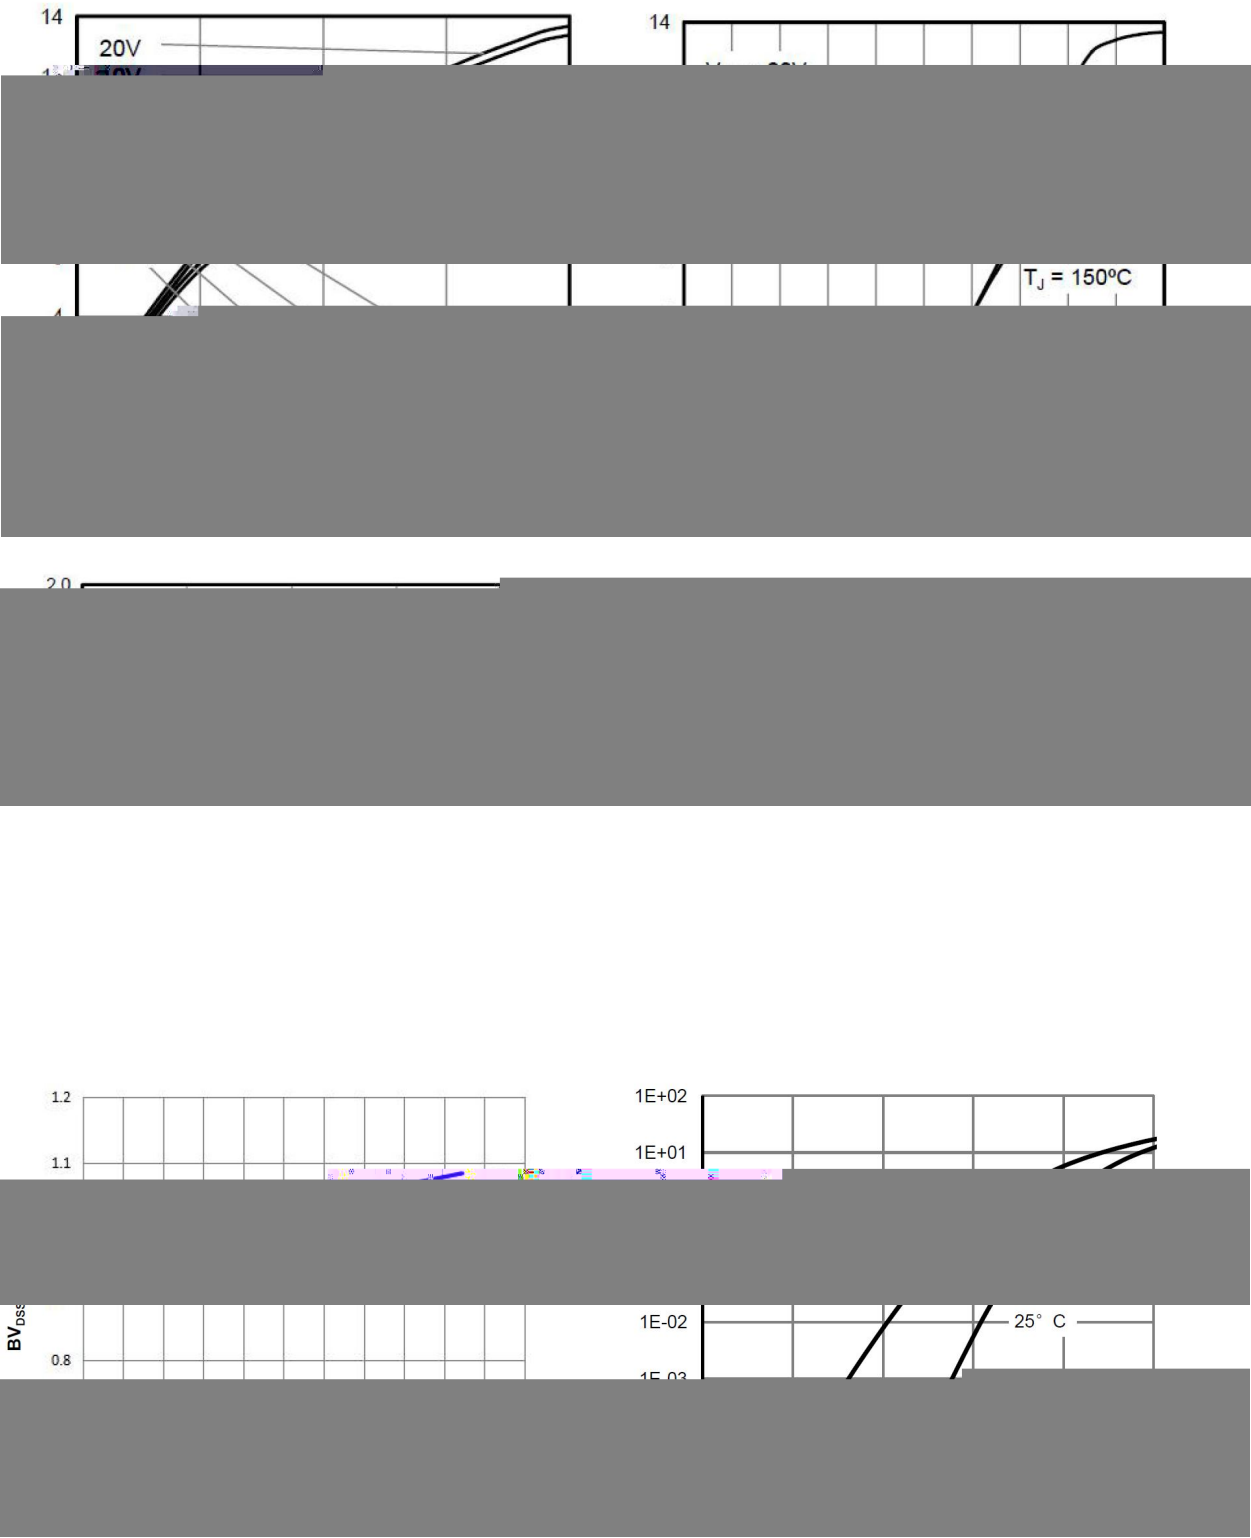

/ Electrical Characteristic Curve

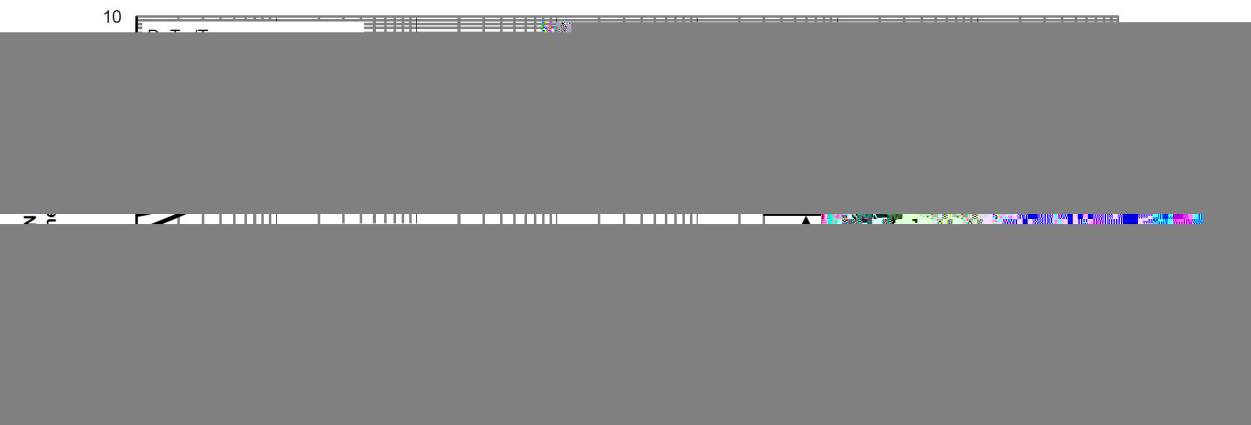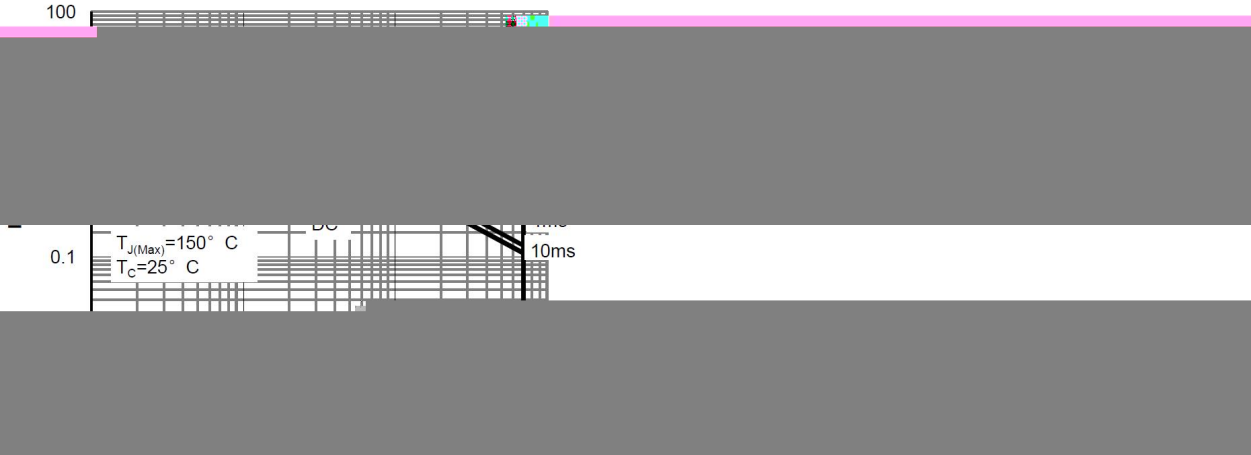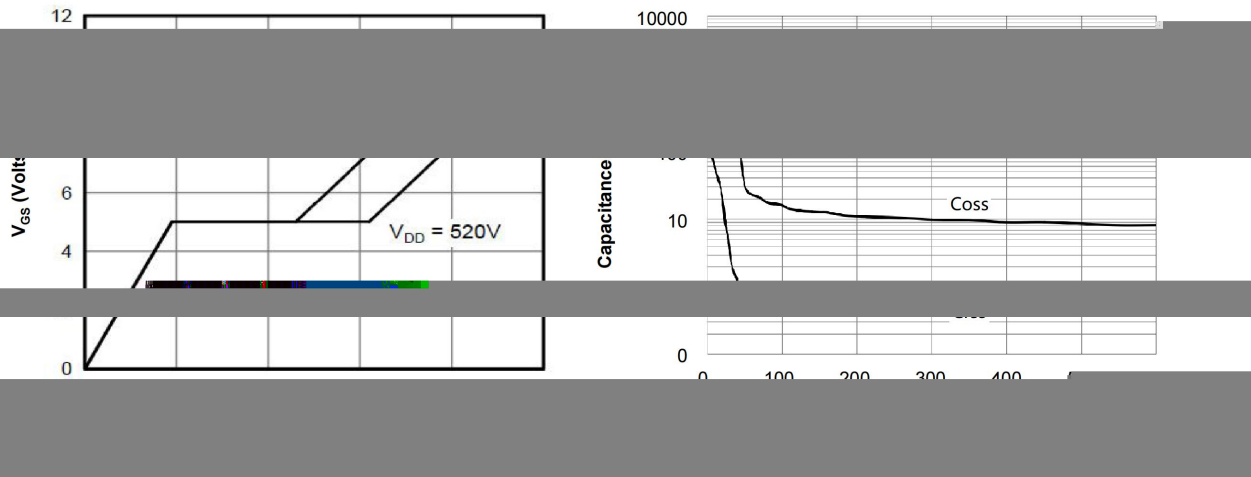

/ Package Dimensions

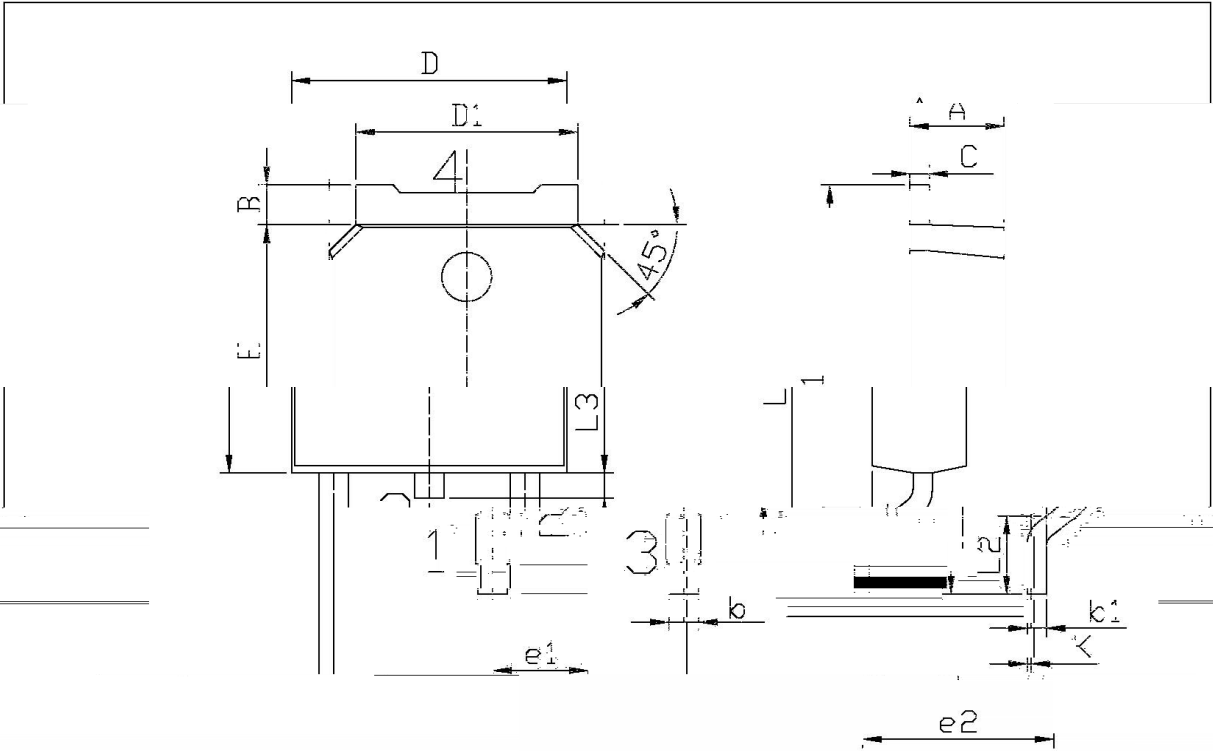


单位: mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	0.95	1.25	A	2.20	2.40
e1	2.25	2.32	B	0.19	1.25
e2	4.75	4.93	b	0.50	1.00
L1	9.85	10.35	b1	0.45	0.55
L3	0.60	0.90	e2	0.45	0.55
L2	0.09	0.30	D	6.45	6.75
K	0.00	0.50	K	0.00	0.50

T0-252

/ Marking Instructions

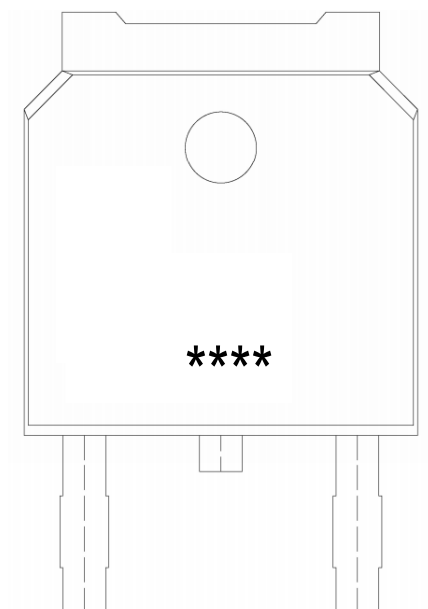

65R1K0C

[illegible]
$$\begin{array}{ccccccc} & & & & & & ^\circ\text{C} \\ \pm & & & \pm & & \pm & ^\circ\text{C} \\ & & ^\circ\text{C} & & & & \\ & & & & & ^\circ\text{C} & \pm \end{array}$$
$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$
[illegible]