

BRD65R380C

Rev.B May.-2022



DATA SHEET

/ Revised record

A	2022.4.21	ALL	AOS-AOD380A60		
B	2022.5.26	2,3,4,5	YC-RMX65R380SN_ReV1.0		

/ Descriptions



TO-252 N 650V

N-CHANNEL 650V Super-Junction Power MOSFET in a TO-252 Plastic Package.

/ Features $R_{DS(on)}$ C_{rss} Low $R_{DS(on)}$, low gate charge, low C_{rss} , fast switching, HF Product.**/ Applications**

DC/DC

Suited for low voltage applications such as automotive, DC/DC Converters, and high efficiency switching for power management in portable and battery operated products.

/ Equivalent Circuit**/ Pinning**

PIN1 G

PIN 2 D

PIN 3 S

PIN 4 D

/ Marking

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	650	V
Drain Current	$I_D(T_c=25^{\circ}\text{C})$	11	A
Drain Current - Pulsed	I_{DM}	44	A
Gate-Source Voltage	V_{GS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	277	mJ
Avalanche Current	I_{AS}	8	A
Power Dissipation	$P_D(T_c=25^{\circ}\text{C})$	125	W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^{\circ}\text{C}$
Junction-to-Case	$R_{\theta JC}$	1	$^{\circ}\text{C/W}$
Junction-to-Ambient	$R_{\theta JA}$	55	$^{\circ}\text{C/W}$




Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V$ $I_D=250\mu A$	650	700		V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=650V$ $V_{GS}=0V$ $T_J=25^{\circ}\text{C}$			1.0	μA
Gate-Body Leakage Current, Forward	I_{GSS}	$V_{GS}=\pm 30V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$ $I_D=250\mu A$	2.5	3.3	4.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V$ $I_D=5.5A$		320	380	m Ω
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS}=0V$ $I_{SD}=1A$ $T_J=25^{\circ}\text{C}$			1.2	V
Gate Resistance	R_g	$V_{GS}=0V$ $f=1.0\text{MHz}$		4.1		Ω
Input Capacitance	C_{iss}	$V_{DS}=100V$ $V_{GS}=0V$ $f=1.0\text{MHz}$		735		pF
Output Capacitance	C_{oss}			35		pF
Reverse Transfer Capacitance	C_{rss}			0.45		pF

Turn




23

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Continuous Diode Forward Current	I_S				11	A
Total Gate Charge	Q_g	$V_{DS}=480V \quad I_D=5.5A$ $V_{GS}=10V$		19.2		nC
Gate-Source Charge	Q_{gs}			3.1		nC
Gate-Drain Charge	Q_{gd}			8.2		nC
Reverse recovery time	T_{rr}	$V_R=400V, I_F=5.5A,$		310		ns
Reverse recovery charge	Q_{rr}			2.8		uC


/ Electrical Characteristic Curve

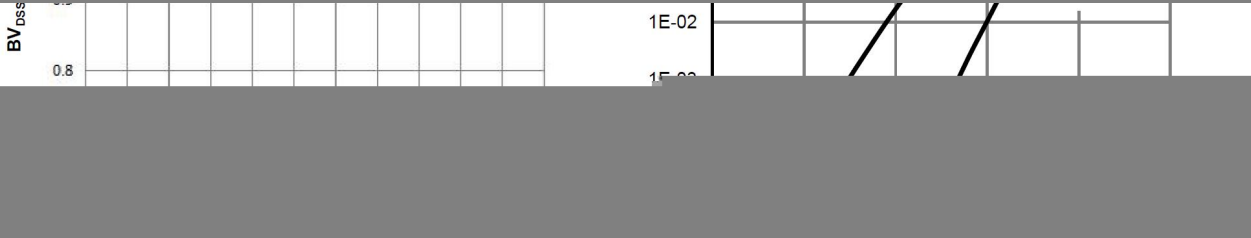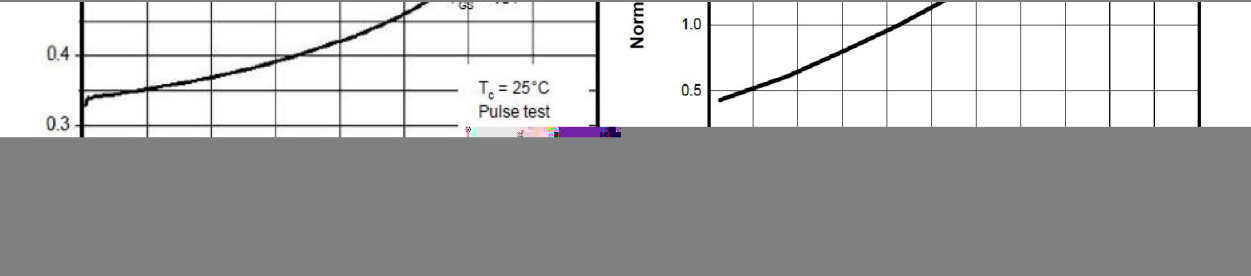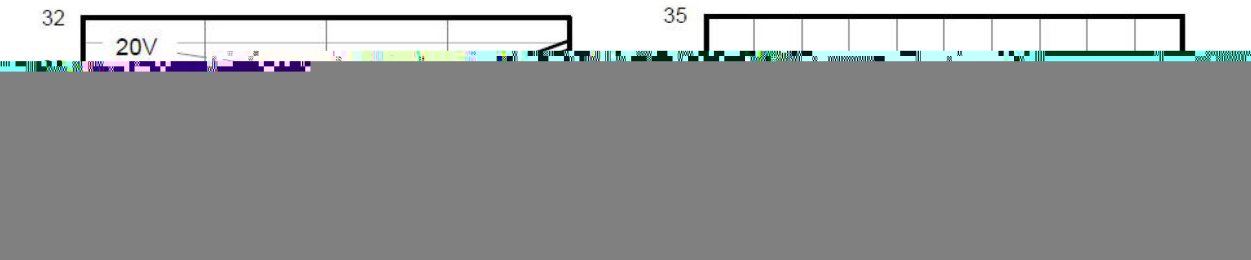

/ Electrical Characteristic Curve

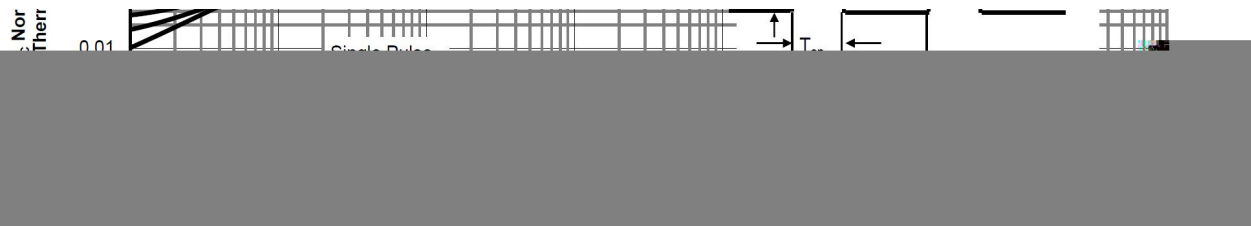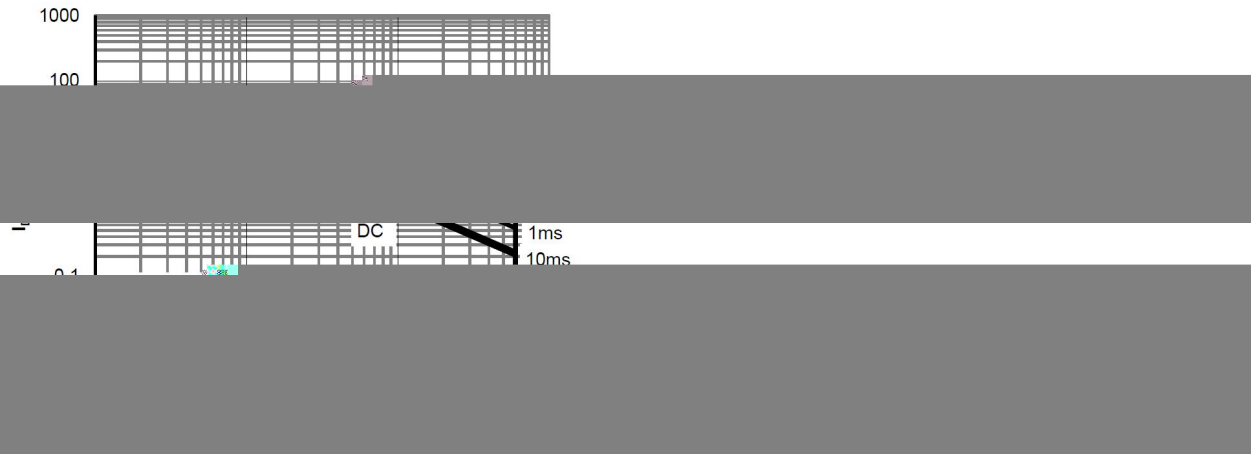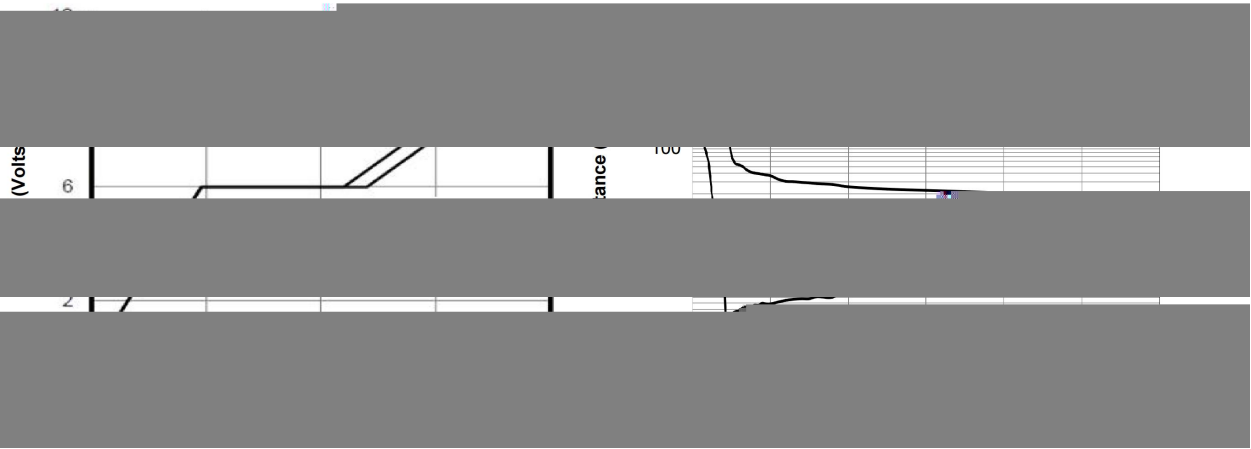


/ Package Dimensions

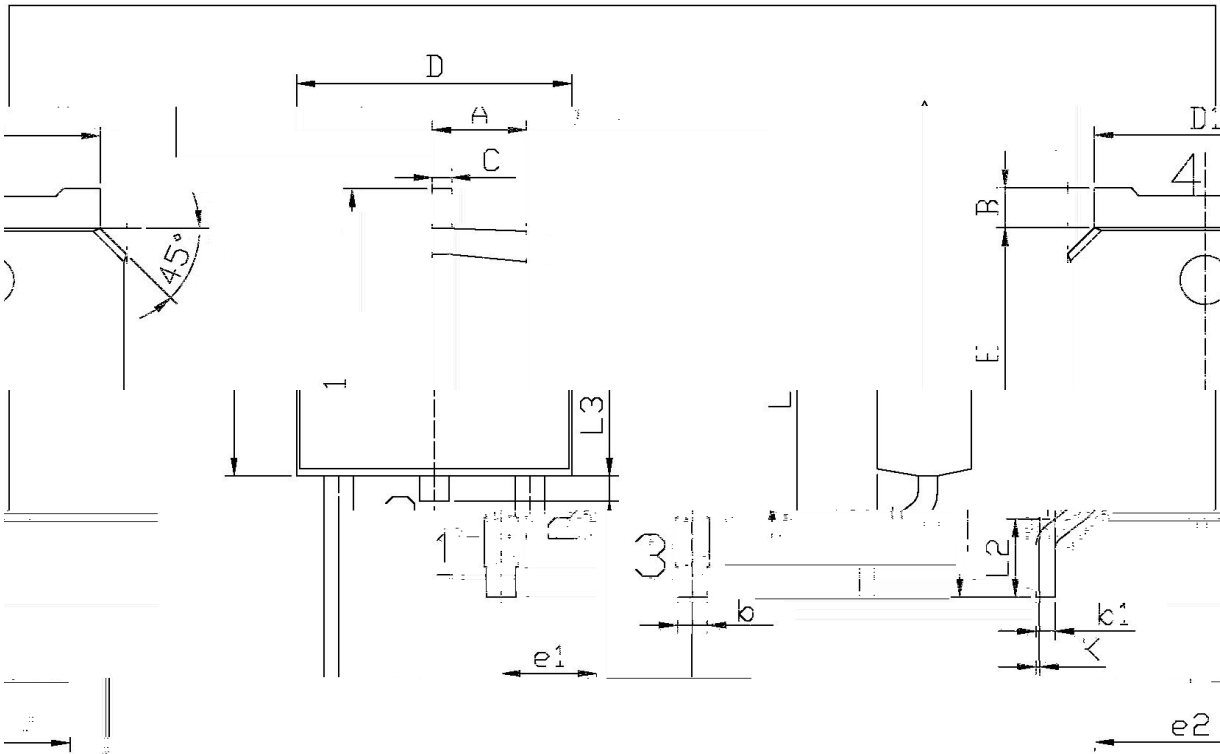

单位: mm

Symbol	Dimension	Symbol	Dimension
A	2.20	B	6.45
B	6.45	C	0.95
C	0.95	D	12.40
D	12.40	E	0.20
E	0.20	L	0.75
L	0.75	L1	0.55
L1	0.55	L2	0.20
L2	0.20	L3	0.60
L3	0.60	L4	0.90
L4	0.90	L5	0.30
L5	0.30	L6	0.30
L6	0.30	L7	0.30
L7	0.30	L8	0.30
L8	0.30	L9	0.30
L9	0.30	L10	0.30
L10	0.30	L11	0.30
L11	0.30	L12	0.30
L12	0.30	L13	0.30
L13	0.30	L14	0.30
L14	0.30	L15	0.30
L15	0.30	L16	0.30
L16	0.30	L17	0.30
L17	0.30	L18	0.30
L18	0.30	L19	0.30
L19	0.30	L20	0.30
L20	0.30	L21	0.30
L21	0.30	L22	0.30
L22	0.30	L23	0.30
L23	0.30	L24	0.30
L24	0.30	L25	0.30
L25	0.30	L26	0.30
L26	0.30	L27	0.30
L27	0.30	L28	0.30
L28	0.30	L29	0.30
L29	0.30	L30	0.30
L30	0.30	L31	0.30
L31	0.30	L32	0.30
L32	0.30	L33	0.30
L33	0.30	L34	0.30
L34	0.30	L35	0.30
L35	0.30	L36	0.30
L36	0.30	L37	0.30
L37	0.30	L38	0.30
L38	0.30	L39	0.30
L39	0.30	L40	0.30
L40	0.30	L41	0.30
L41	0.30	L42	0.30
L42	0.30	L43	0.30
L43	0.30	L44	0.30
L44	0.30	L45	0.30
L45	0.30	L46	0.30
L46	0.30	L47	0.30
L47	0.30	L48	0.30
L48	0.30	L49	0.30
L49	0.30	L50	0.30
L50	0.30	L51	0.30
L51	0.30	L52	0.30
L52	0.30	L53	0.30
L53	0.30	L54	0.30
L54	0.30	L55	0.30
L55	0.30	L56	0.30
L56	0.30	L57	0.30
L57	0.30	L58	0.30
L58	0.30	L59	0.30
L59	0.30	L60	0.30
L60	0.30	L61	0.30
L61	0.30	L62	0.30
L62	0.30	L63	0.30
L63	0.30	L64	0.30
L64	0.30	L65	0.30
L65	0.30	L66	0.30
L66	0.30	L67	0.30
L67	0.30	L68	0.30
L68	0.30	L69	0.30
L69	0.30	L70	0.30
L70	0.30	L71	0.30
L71	0.30	L72	0.30
L72	0.30	L73	0.30
L73	0.30	L74	0.30
L74	0.30	L75	0.30
L75	0.30	L76	0.30
L76	0.30	L77	0.30
L77	0.30	L78	0.30
L78	0.30	L79	0.30
L79	0.30	L80	0.30
L80	0.30	L81	0.30
L81	0.30	L82	0.30
L82	0.30	L83	0.30
L83	0.30	L84	0.30
L84	0.30	L85	0.30
L85	0.30	L86	0.30
L86	0.30	L87	0.30
L87	0.30	L88	0.30
L88	0.30	L89	0.30
L89	0.30	L90	0.30
L90	0.30	L91	0.30
L91	0.30	L92	0.30
L92	0.30	L93	0.30
L93	0.30	L94	0.30
L94	0.30	L95	0.30
L95	0.30	L96	0.30
L96	0.30	L97	0.30
L97	0.30	L98	0.30
L98	0.30	L99	0.30
L99	0.30	L100	0.30
L100	0.30	L101	0.30
L101	0.30	L102	0.30
L102	0.30	L103	0.30
L103	0.30	L104	0.30
L104	0.30	L105	0.30
L105	0.30	L106	0.30
L106	0.30	L107	0.30
L107	0.30	L108	0.30
L108	0.30	L109	0.30
L109	0.30	L110	0.30
L110	0.30	L111	0.30
L111	0.30	L112	0.30
L112	0.30	L113	0.30
L113	0.30	L114	0.30
L114	0.30	L115	0.30
L115	0.30	L116	0.30
L116	0.30	L117	0.30
L117	0.30	L118	0.30
L118	0.30	L119	0.30
L119	0.30	L120	0.30
L120	0.30	L121	0.30
L121	0.30	L122	0.30
L122	0.30	L123	0.30
L123	0.30	L124	0.30
L124	0.30	L125	0.30
L125	0.30	L126	0.30
L126	0.30	L127	0.30
L127	0.30	L128	0.30
L128	0.30	L129	0.30
L129	0.30	L130	0.30
L130	0.30	L131	0.30
L131	0.30	L132	0.30
L132	0.30	L133	0.30
L133	0.30	L134	0.30
L134	0.30	L135	0.30
L135	0.30	L136	0.30
L136	0.30	L137	0.30
L137	0.30	L138	0.30
L138	0.30	L139	0.30
L139	0.30	L140	0.30
L140	0.30	L141	0.30
L141	0.30	L142	0.30
L142	0.30	L143	0.30
L143	0.30	L144	0.30
L144	0.30	L145	0.30
L145	0.30	L146	0.30
L146	0.30	L147	0.30
L147	0.30	L148	0.30
L148	0.30	L149	0.30
L149	0.30	L150	0.30
L150	0.30	L151	0.30
L151	0.30	L152	0.30
L152	0.30	L153	0.30
L153	0.30	L154	0.30
L154	0.30	L155	0.30
L155	0.30	L156	0.30
L156	0.30	L157	0.30
L157	0.30	L158	0.30
L158	0.30	L159	0.30
L159	0.30	L160	0.30
L160	0.30	L161	0.30
L161	0.30	L162	0.30
L162	0.30	L163	0.30
L163	0.30	L164	0.30
L164	0.30	L165	0.30
L165	0.30	L166	0.30
L166	0.30	L167	0.30
L167	0.30	L168	0.30
L168	0.30	L169	0.30
L169	0.30	L170	0.30
L170	0.30	L171	0.30
L171	0.30	L172	0.30
L172	0.30	L173	0.30
L173	0.30	L174	0.30
L174	0.30	L175	0.30
L175	0.30	L176	0.30
L176	0.30	L177	0.30
L177	0.30	L178	0.30
L178	0.30	L179	0.30
L179	0.30	L180	0.30
L180	0.30	L181	0.30
L181	0.30	L182	0.30
L182	0.30	L183	0.30
L183	0.30	L184	0.30
L184	0.30	L185	0.30
L185	0.30	L186	0.30
L186	0.30	L187	0.30
L187	0.30	L188	0.30
L188	0.30	L189	0.30
L189	0.30	L190	0.30
L190	0.30	L191	0.30
L191	0.30	L192	0.30
L192	0.30	L193	0.30
L193	0.30	L194	0.30
L194	0.30	L195	0.30
L195	0.30	L196	0.30
L196	0.30	L197	0.30
L197	0.30	L198	0.30
L198	0.30	L199	0.30
L199	0.30	L200	0.30
L200	0.30	L201	0.30
L201	0.30	L202	0.30
L202	0.30	L203	0.30
L203	0.30	L204	0.30
L204	0.30	L205	0.30
L205	0.30	L206	0.30
L206	0.30	L207	0.30
L207	0.30	L208	0.30
L208	0.30	L209	0.30
L209	0.30	L210	0.30
L210	0.30	L211	0.30
L211	0.30	L212	0.30
L212	0.30	L213	0.30
L213	0.30	L214	0.30
L214	0.30	L215	0.30
L215	0.30	L216	0.30
L216	0.30	L217	0.30
L217	0.30	L218	0.30
L218	0.30	L219	0.30
L219	0.30	L220	0.30
L220	0.30	L221	0.30
L221	0.30	L222	0.30
L222	0.30	L223	0.30
L223	0.30	L224	0.30
L224	0.30	L225	0.30
L225	0.30	L226	0.30
L226	0.30	L227	0.30
L227	0.30	L228	0.30
L228	0.30	L229	0.30
L229	0.30	L230	0.30
L230	0.30	L231	0.30
L231	0.30	L232	0.30
L232	0.30	L233	0.30
L233	0.30	L234	0.30
L234	0.30	L235	0.30
L235	0.30	L236	0.30
L236	0.30	L237	0.30
L237	0.30	L238	0.30
L238	0.30	L239	0.30
L239	0.30	L240	0.30
L240	0.30	L241	0.30
L241	0.30	L242	0.30
L242	0.30	L243	0.30
L243	0.30	L244	0.30
L244	0.30	L245	0.30
L245	0.30	L246	0.30
L246	0.30	L247	0.30
L247	0.30	L248	0.30
L248	0.30	L249	0.30
L249	0.30	L250	0.30
L250	0.30	L251	0.30
L251	0.30	L252	0.30
L252	0.30	L253	0.30
L253	0.30	L254	0.30
L254	0.30	L255	0.30
L255	0.30	L256	0.30
L256	0.30	L257	0.30
L257	0.30	L258	0.30
L258	0.30	L259	0.30
L259	0.30	L260	0.30
L260	0.30	L261	0.30
L261	0.30	L262	0.30
L262	0.30	L263	0.30
L263	0.30	L264	0.30
L264	0.30	L265	0.30
L265	0.30	L266	0.30
L266	0.30	L267	0.30
L267	0.30	L268	0.30
L268	0.30	L269	0.30
L269	0.30	L270	0.30
L270	0.30	L271	0.30
L271	0.30	L272	0.30
L272	0.30	L273	0.30
L273	0.30	L274	0.30
L274	0.30	L275	0.30
L275	0.30	L276	0.30
L276	0.30	L277	0.30
L277	0.30	L278	0.30
L278	0.30	L279	0.30
L279	0.30	L280	0.30
L280	0.30	L281	0.30
L281	0.30	L282	0.30
L282	0.30	L283	0.30
L283	0.30	L284	0.30
L284	0.30	L285	0.30
L285	0.30	L286	0.30
L286	0.30	L287	0.30
L287	0.30	L288	0.30
L288	0.30	L289	0.30
L289	0.30	L290	0.30
L290	0.30	L291	0.30
L291	0.30	L292	0.30
L292	0.30	L293	0.30
L293	0.30	L294	0.30
L294	0.30	L295	0.30
L295	0.30	L296	0.30
L296	0.30	L297	0.30
L297	0.30	L298	0.30
L298	0.30	L299	0.30
L299	0.30	L300	0.30
L300	0.30	L301	0.30
L301	0.30	L302	0.30
L302	0.30	L303	0.30
L303	0.30	L304	0.30
L304	0.30	L305	0.30
L305	0.30	L306	0.30
L306	0.30	L307	0.30
L307	0.30	L308	0.30
L308	0.30	L309	0.30
L309	0.30	L310	0.30
L310	0.30	L311	0.30
L311	0.30	L312	0.30
L312	0.30	L313	0.30
L313	0.30	L314	0.30
L314	0.30	L315	0.30
L315	0.30	L316	0.30</

/ Marking Instructions

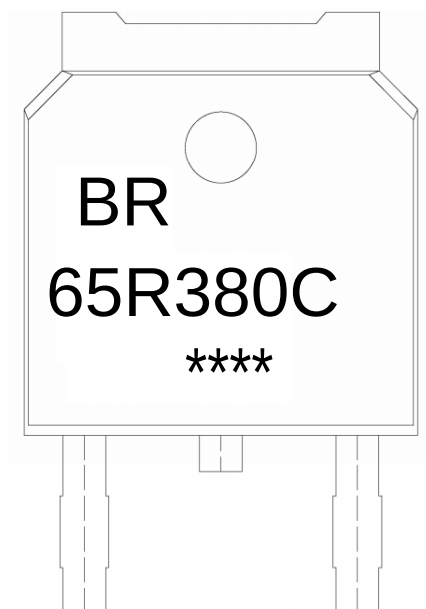

BR

65R380C



Note:

BR: Company Code

65R380C: Product Type Code

****: Lot No. Code, code change with Lot No

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

Note:

- | | | | |
|---|-------------|-----------|--|
| 1 | 150 180 | 60 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | 2 10°C/sec. | | 3. Cooling Speed: 2~10°C/sec. |

/ Resistance to Soldering Heat Test Conditions

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-252	2,500	2	5,000	6	30,000	13" ×16	360×360×50	380×335×366

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box			