

/ Descriptions

20~200V 2.0A

/ Features


AEC-Q101

/ Applications

/ Equivalent Circuit




/ Pinning

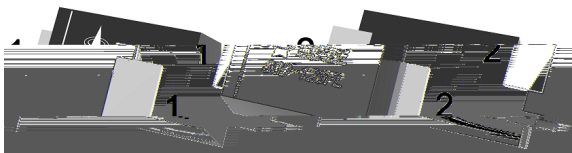


PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

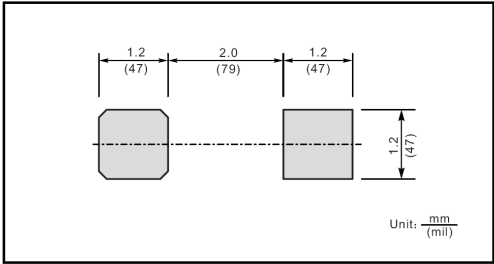


/ Marking

/ Electrical Characteristic Curve

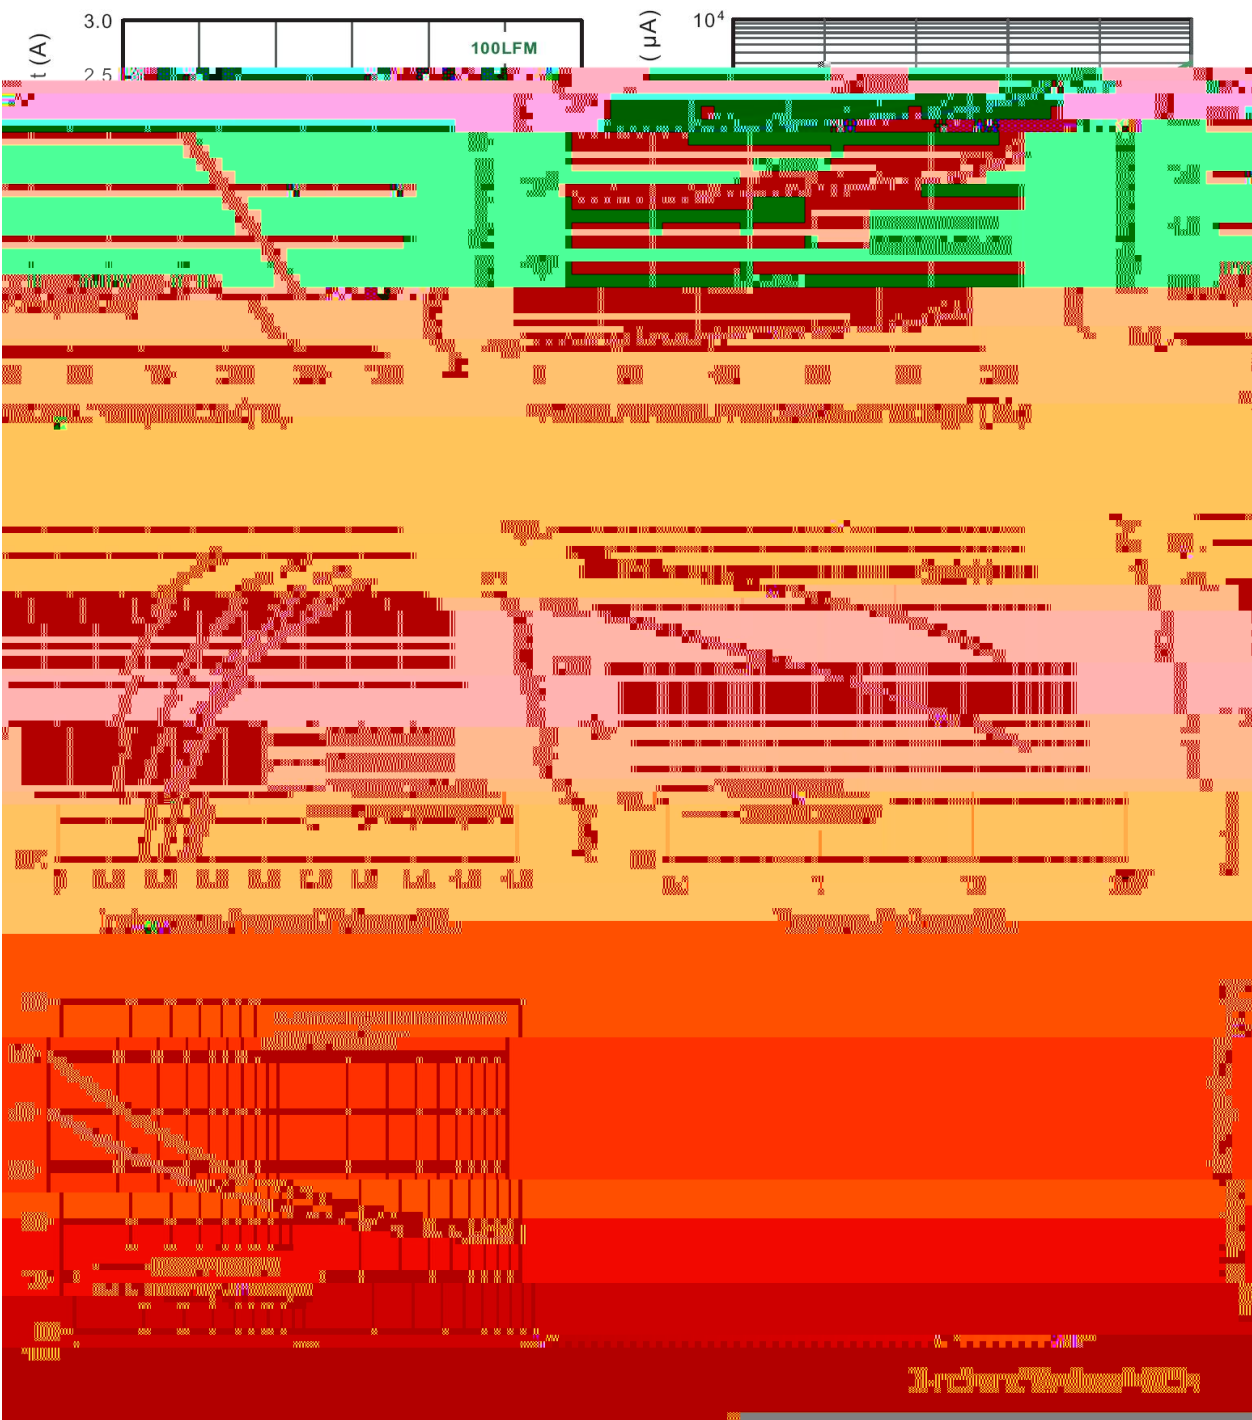


/ Package Dimensions

SOD-123FL

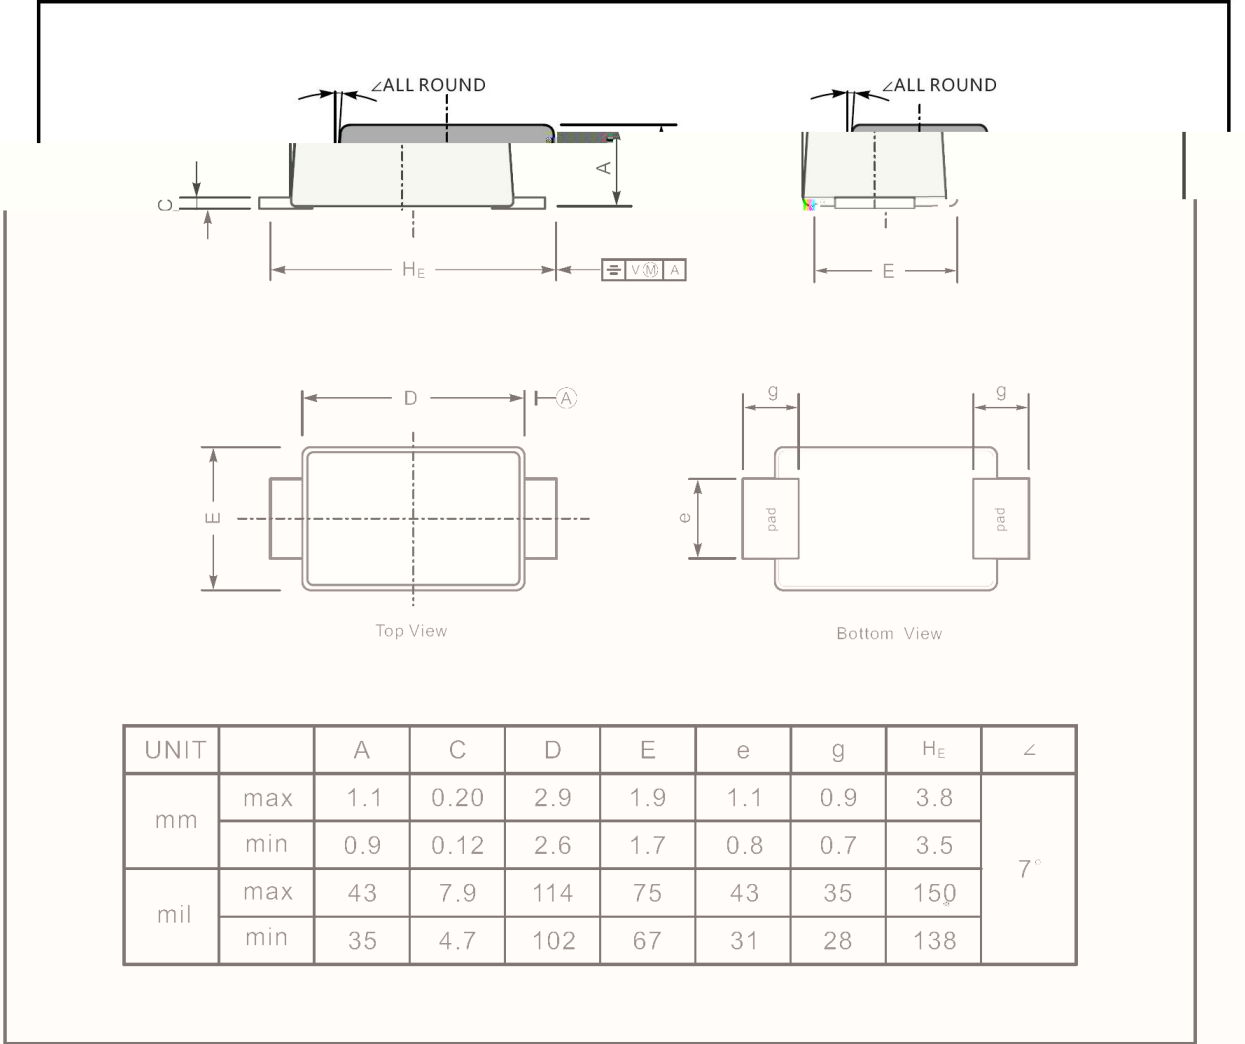

/ Marking Instructions

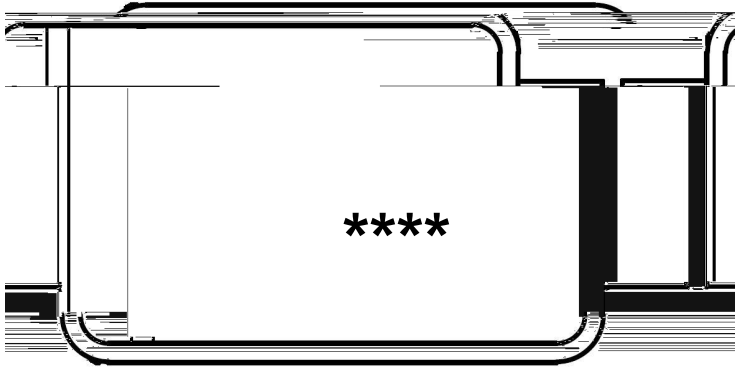


S22

Q

S22

Marking

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

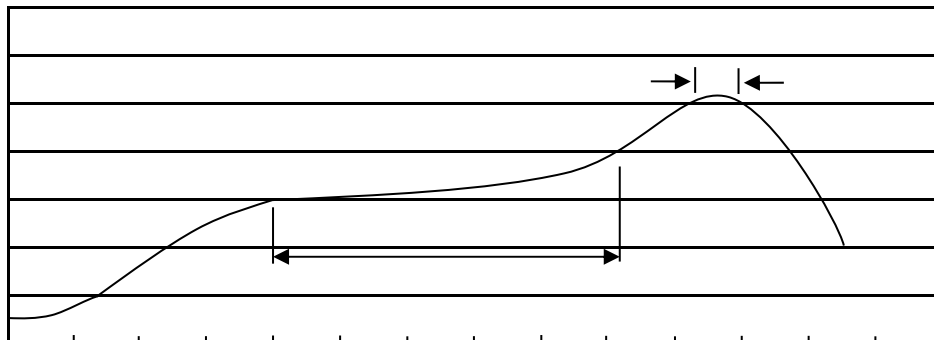 $\pm$ $\pm$
$$\pm$$
$$\pm$$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱	：		箱

/ Notices