

/ Descriptions


DFN1006-2L

ESD

/ Features

/ Applications

/ Equivalent Circuit

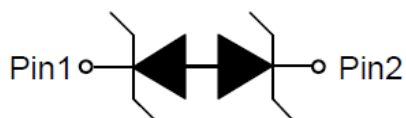

/ Pinning




/ Marking

		±	
		±	

Definitions of electrical characteristics


--	--	--	--	--	--	--

/ Electrical Characteristic Curve(Ta=25)

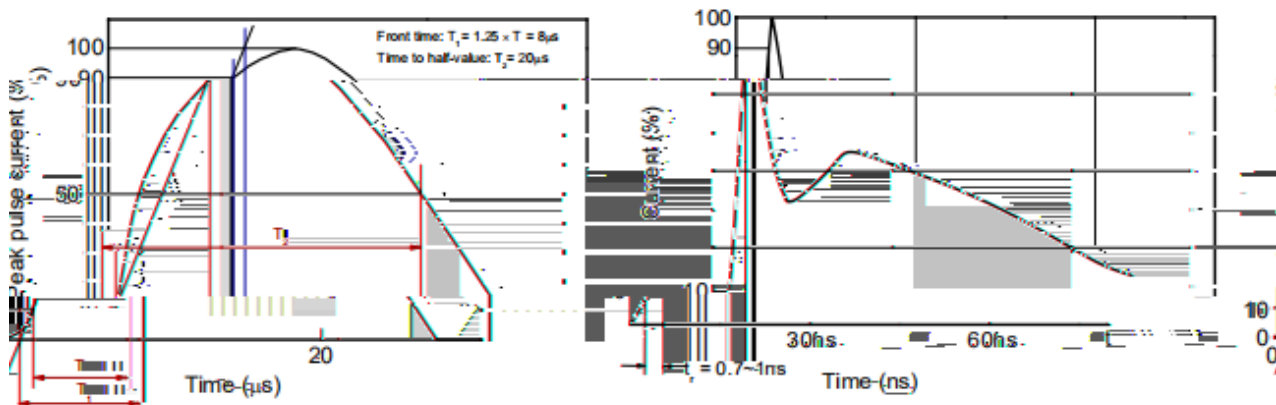


8/20μs waveform per IEC61000-4-5

Contact discharge current waveform per IEC61000-4-2

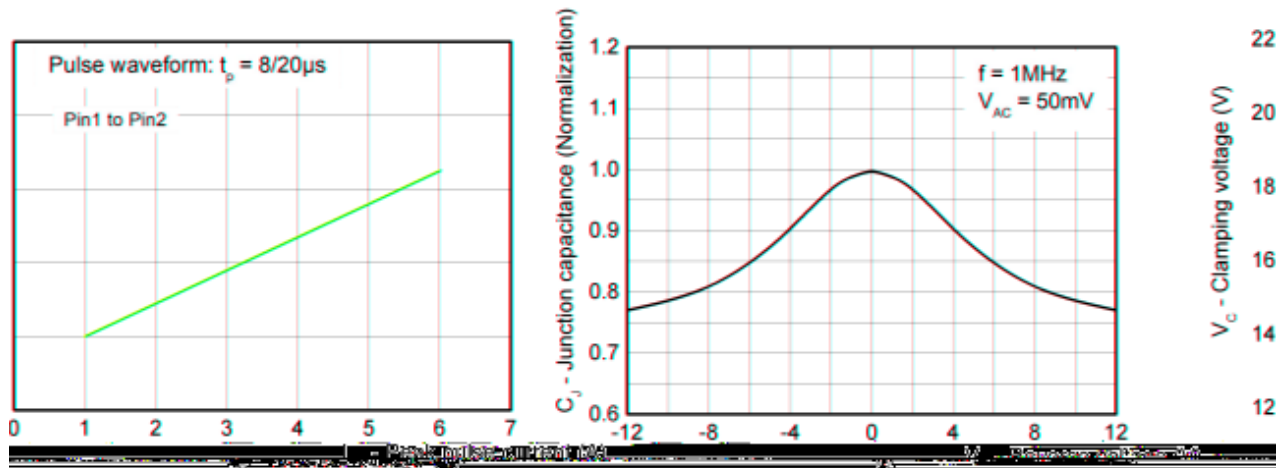


Capacitance vs. Reverse voltage

Clamping voltage vs. Peak pulse current

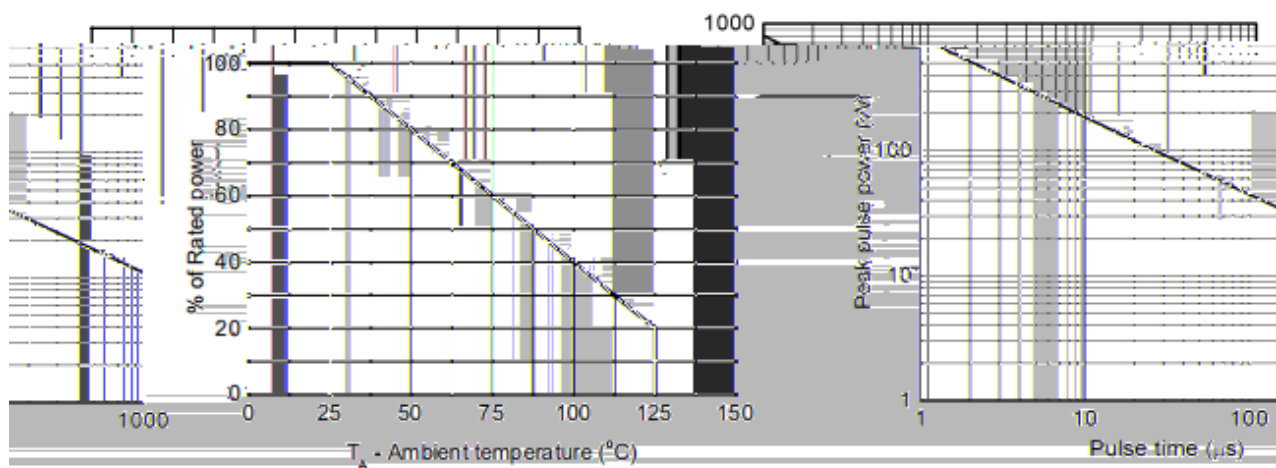


/ Electrical Characteristic Curve(Ta=25)

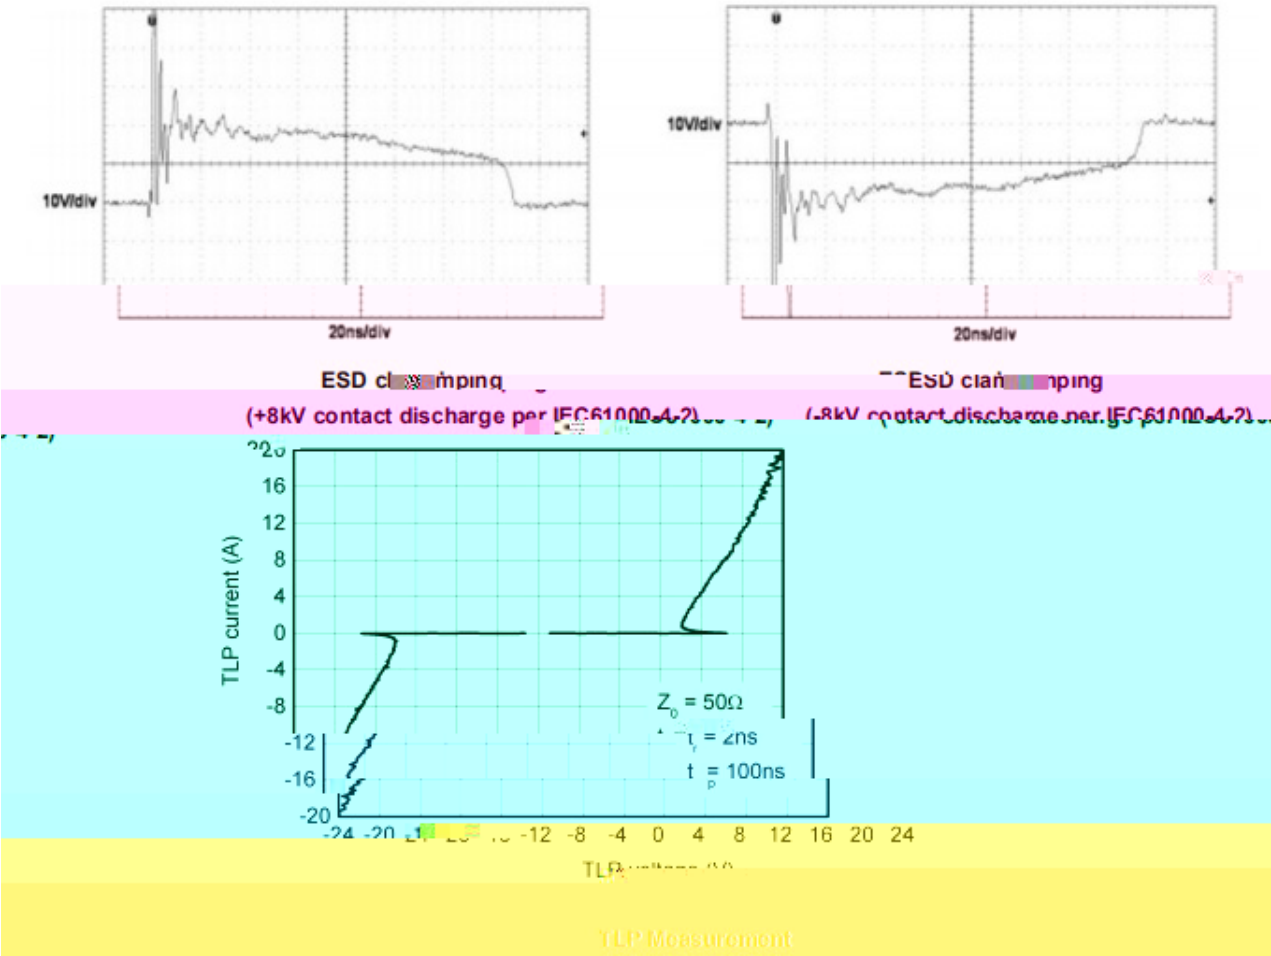

/ Package Dimensions

DFN1006-2L

Unit:mm

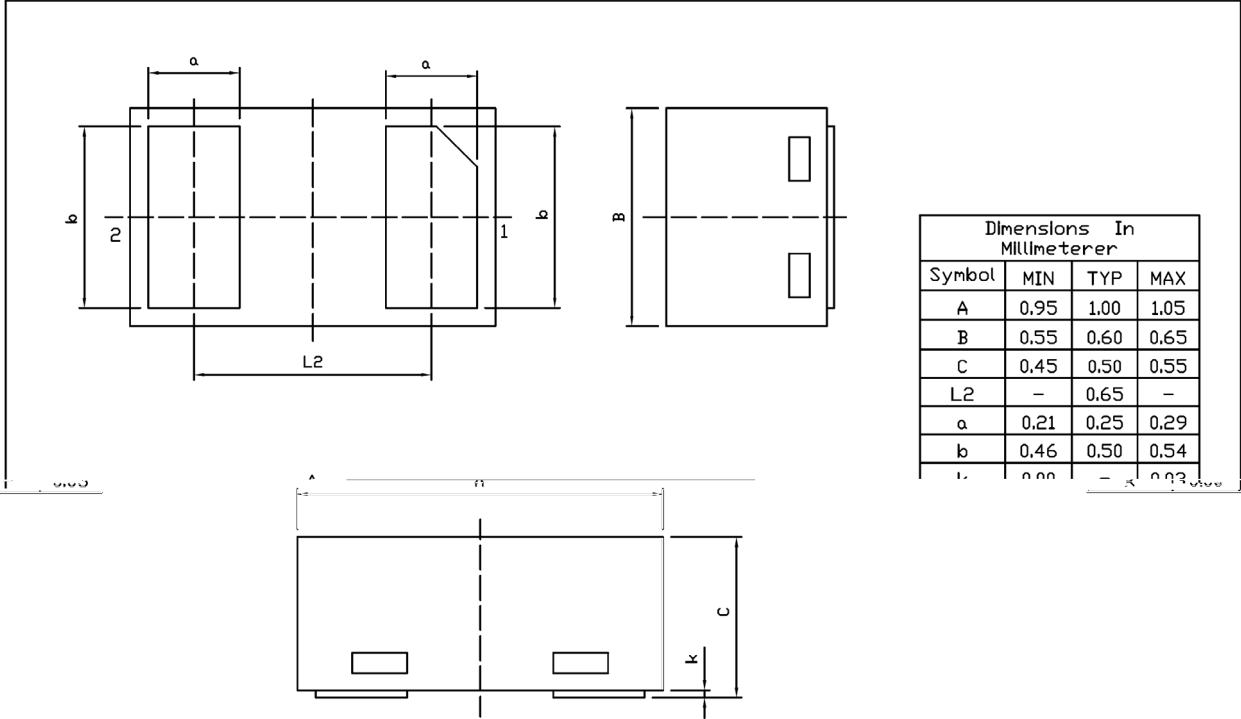

Rev.01 202108

/ Marking Instructions



Q

cD

