


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit

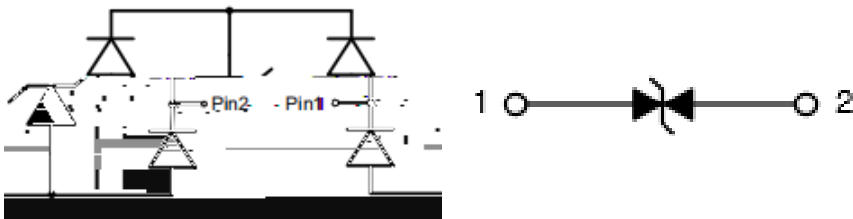

/ Pinning






/ Marking


μ			
μ			
		$\pm$	
		$\pm$	

Definitions of electrical characteristics


/ Electrical Characteristic Curve($T_a=25^\circ\text{C}$)

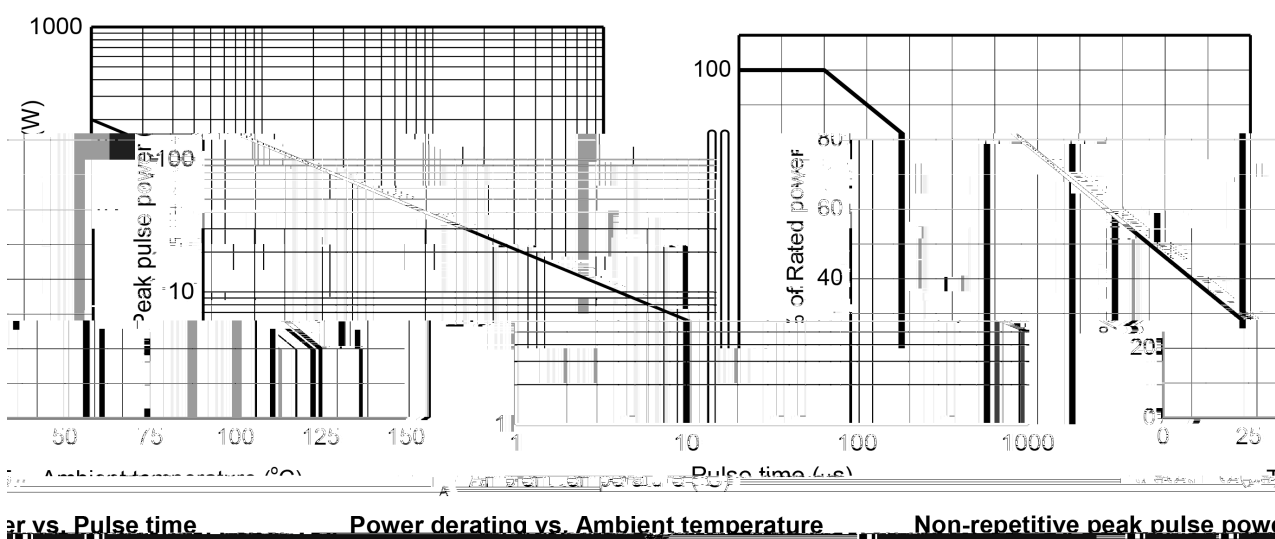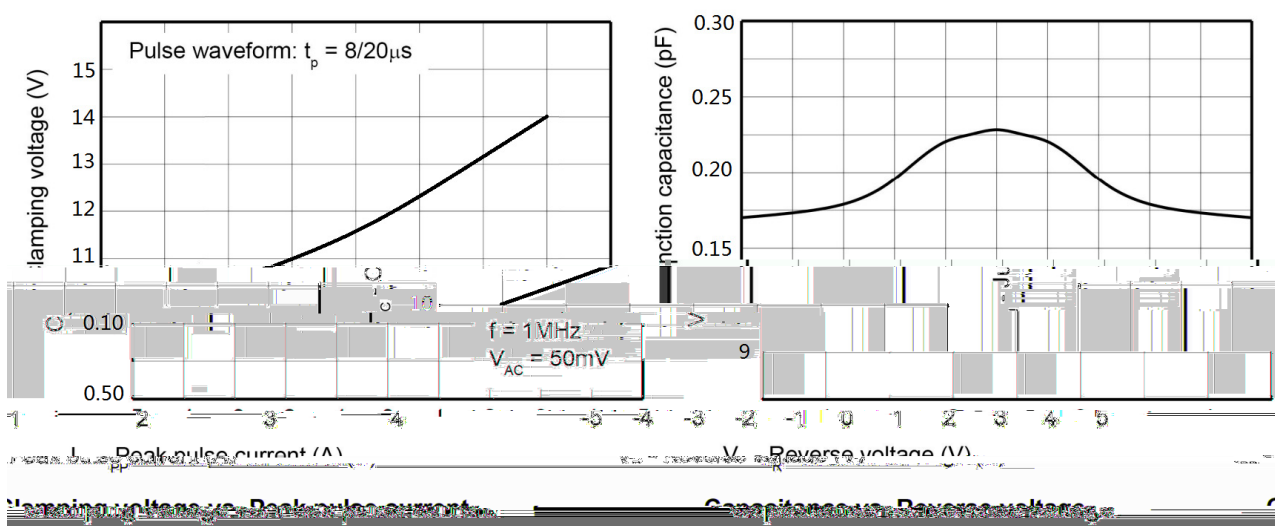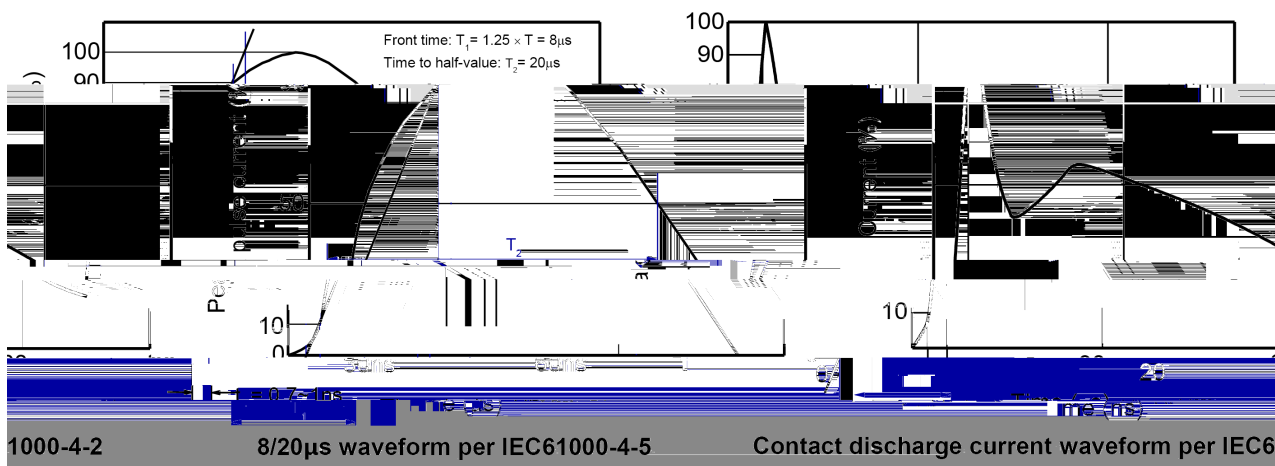

/ Electrical Characteristic Curve(Ta=25)

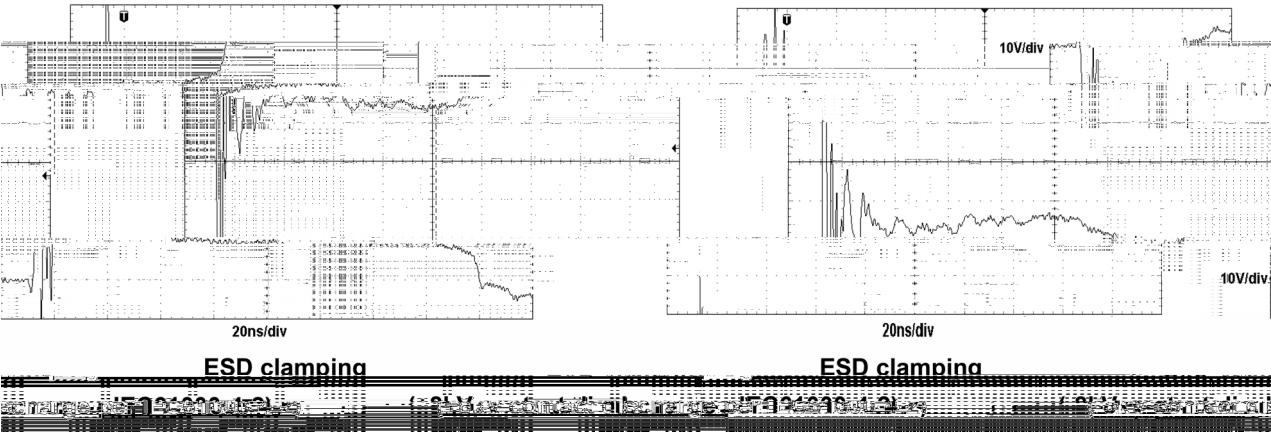


/ Package Dimensions

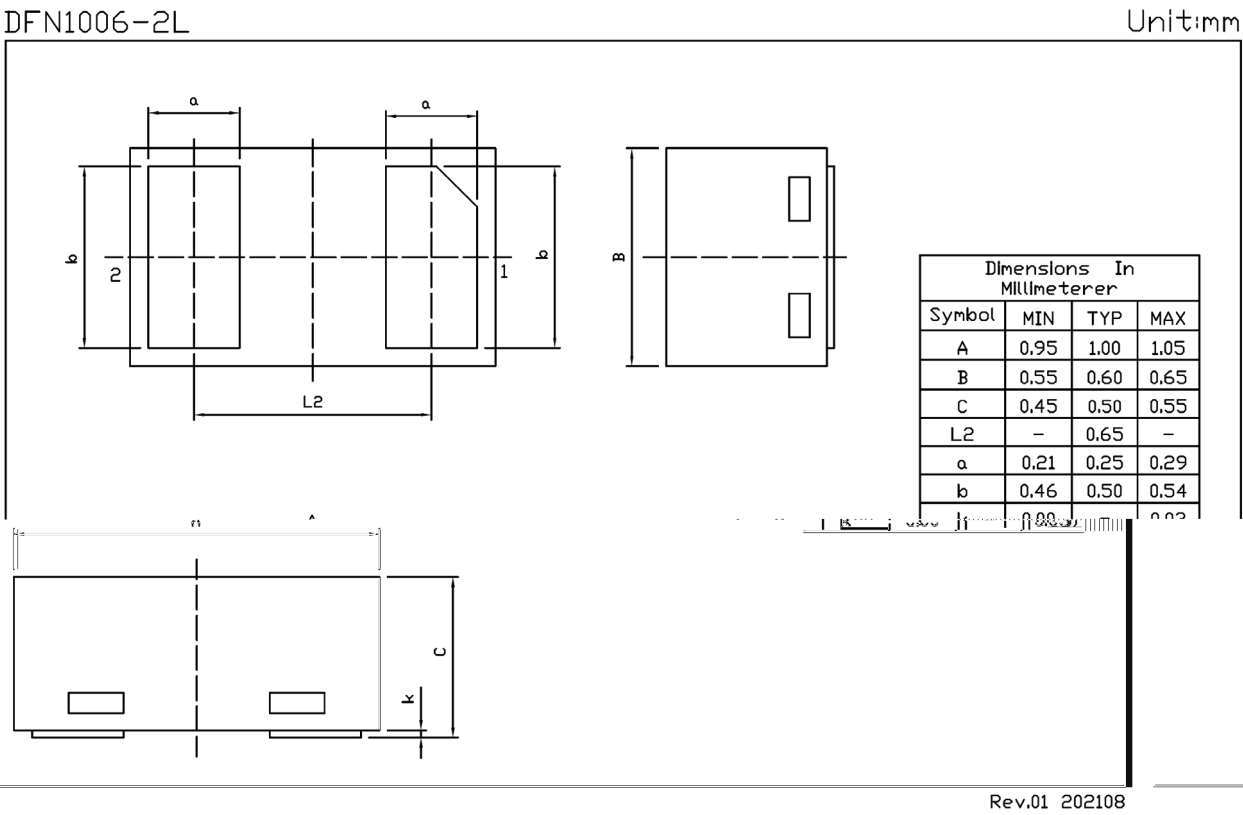

/ Marking Instructions



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

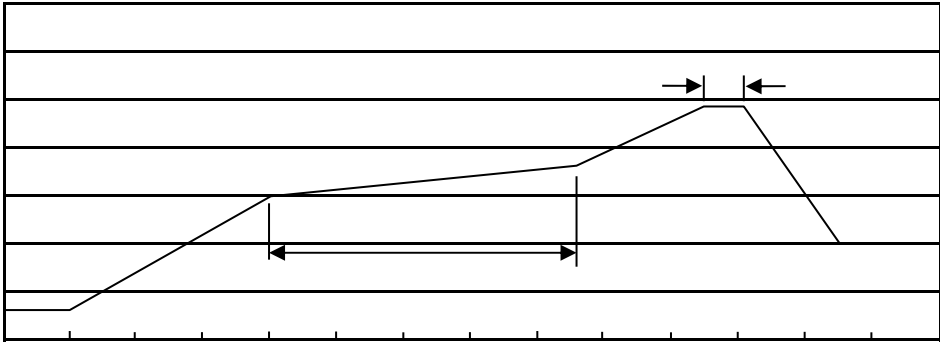

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

/ Notices