

/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		
	①		
	②		
			℃
			℃
	θ		℃
	θ		℃

/ Electrical Characteristics(Ta=25)

		μ				
	Δ Δ	℃				℃
		μ				
		℃				μ
		℃				μ
		③				
		③				Ω
		Ω ^③				



/ Electrical Characteristics(Ta=25)

		③				
		℃	③			
		μ ③	℃			


Ω

≤ μ ≤


/ Electrical Characteristic Curve

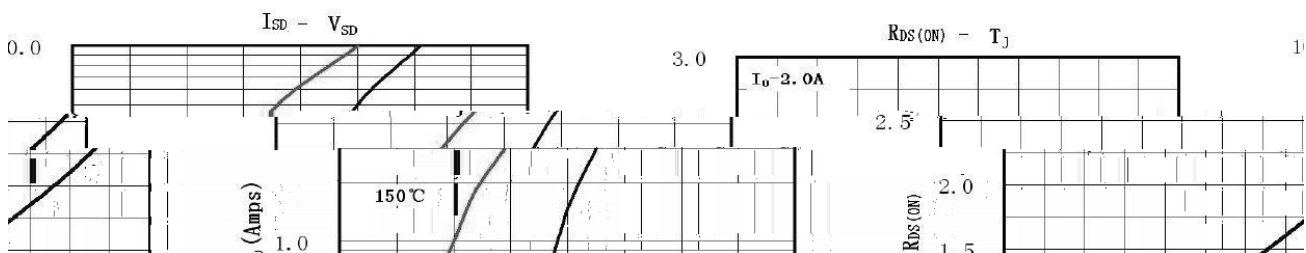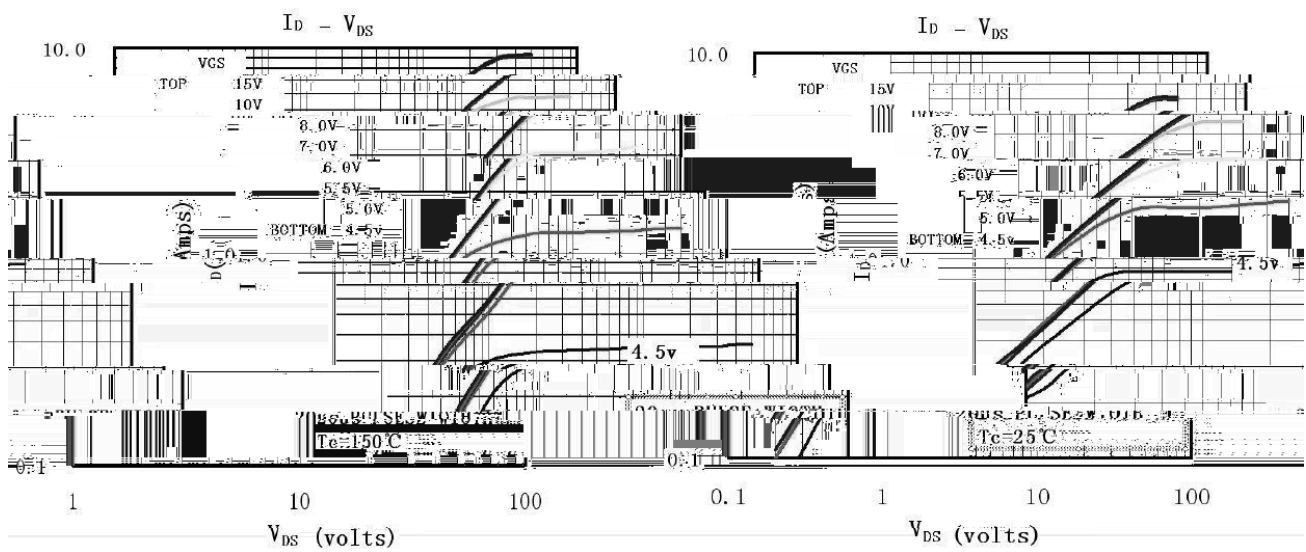


/ Package Dimensions

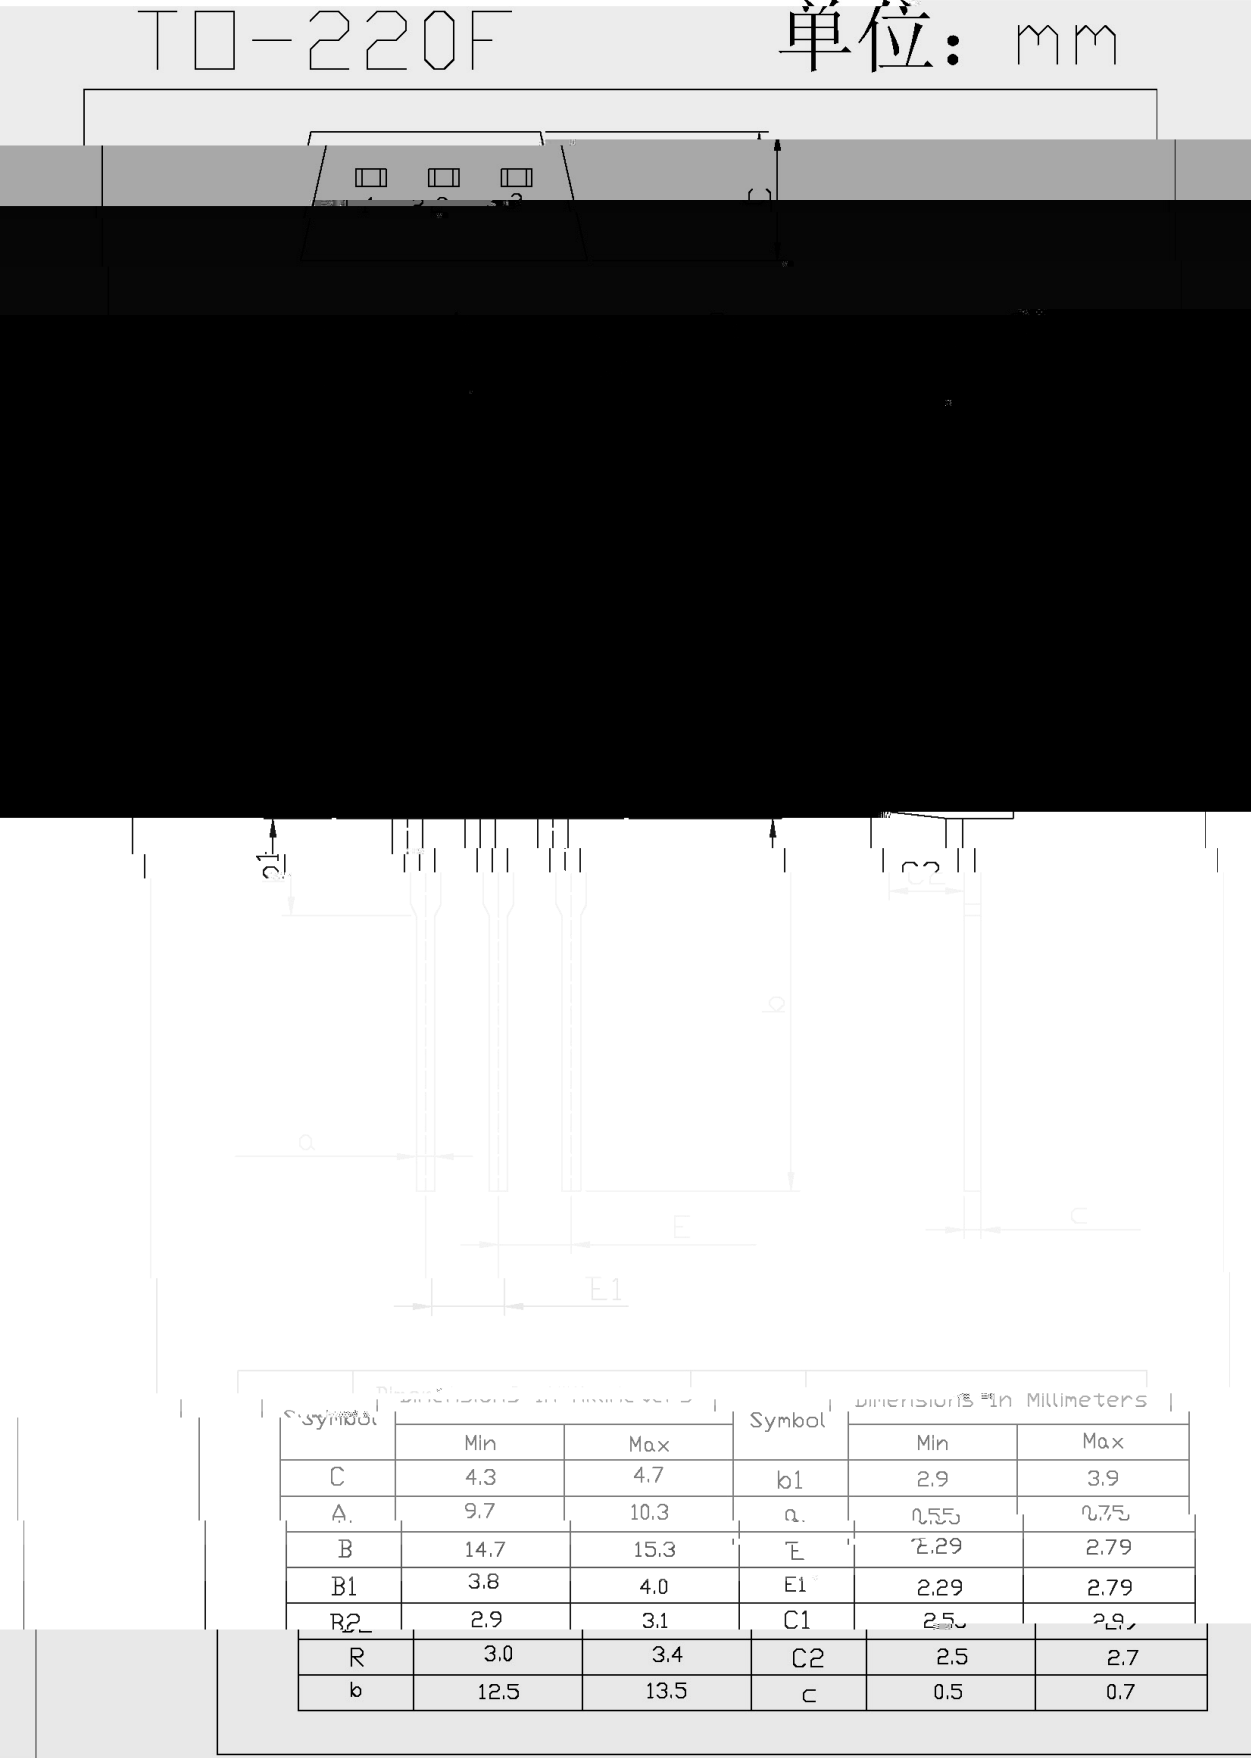

/ Marking Instructions

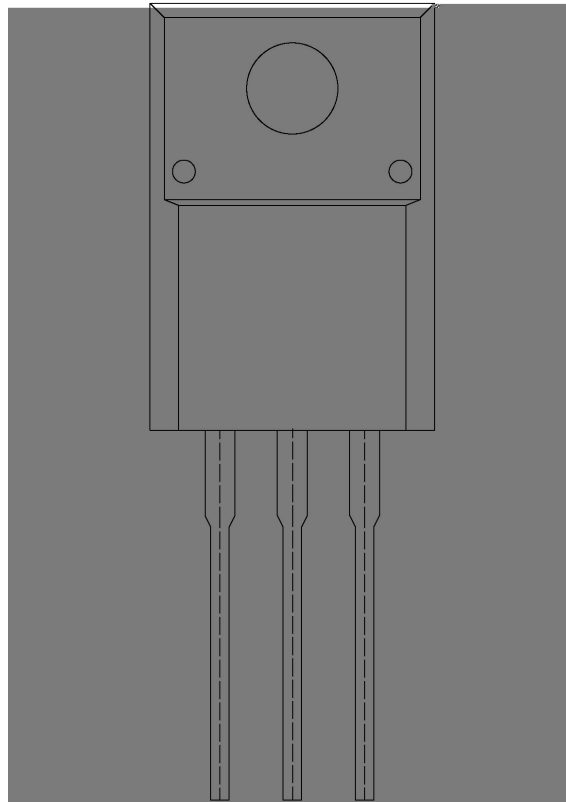

() / Temperature Profile for Dip Soldering(Pb-Free)

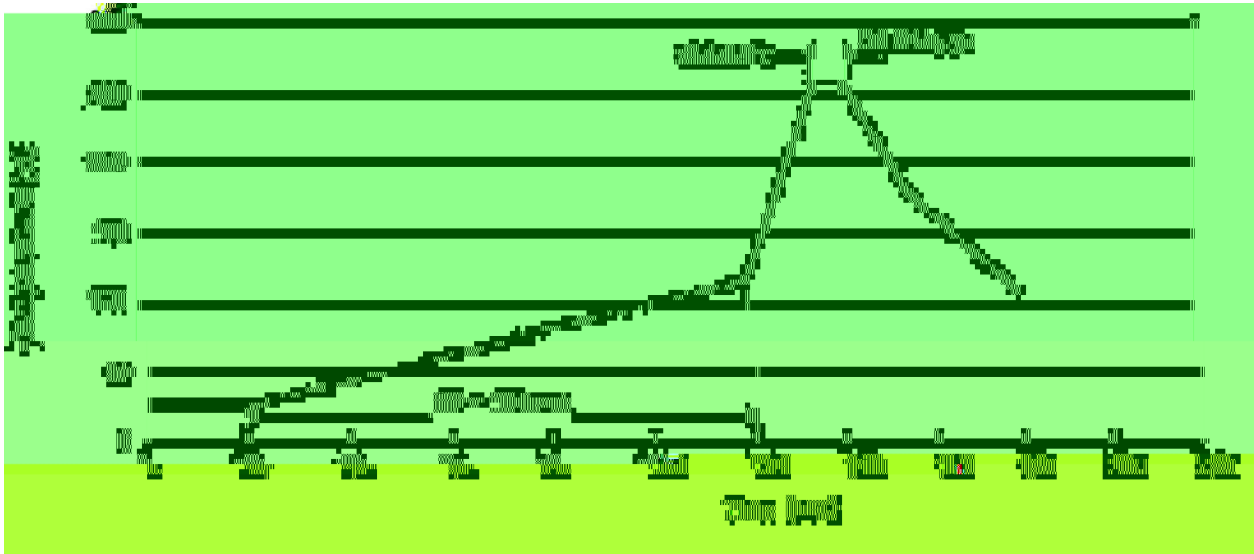

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

/ Notices