


## / Descriptions

## / Features


## / Applications

DC/DC

## / Equivalent Circuit



## / Pinning

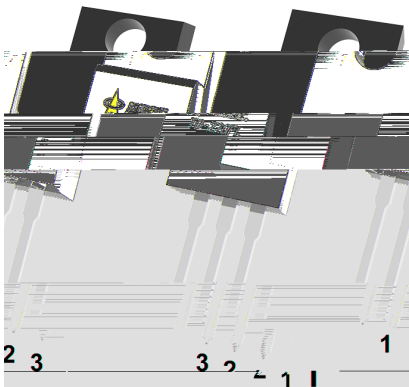


## / Marking

/ Absolute Maximum Ratings(Ta=25 )

|  |   |  |  |
|--|---|--|--|
|  |   |  |  |
|  |   |  |  |
|  | ℃ |  |  |
|  | ℃ |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  |   |  |  |
|  | ℃ |  |  |
|  |   |  |  |


|  |  |   |  |  |  |   |
|--|--|---|--|--|--|---|
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  | μ |
|  |  | ℃ |  |  |  | μ |
|  |  |   |  |  |  |   |
|  |  | μ |  |  |  |   |
|  |  |   |  |  |  | Ω |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |
|  |  |   |  |  |  |   |

## / Electrical Characteristic Curve

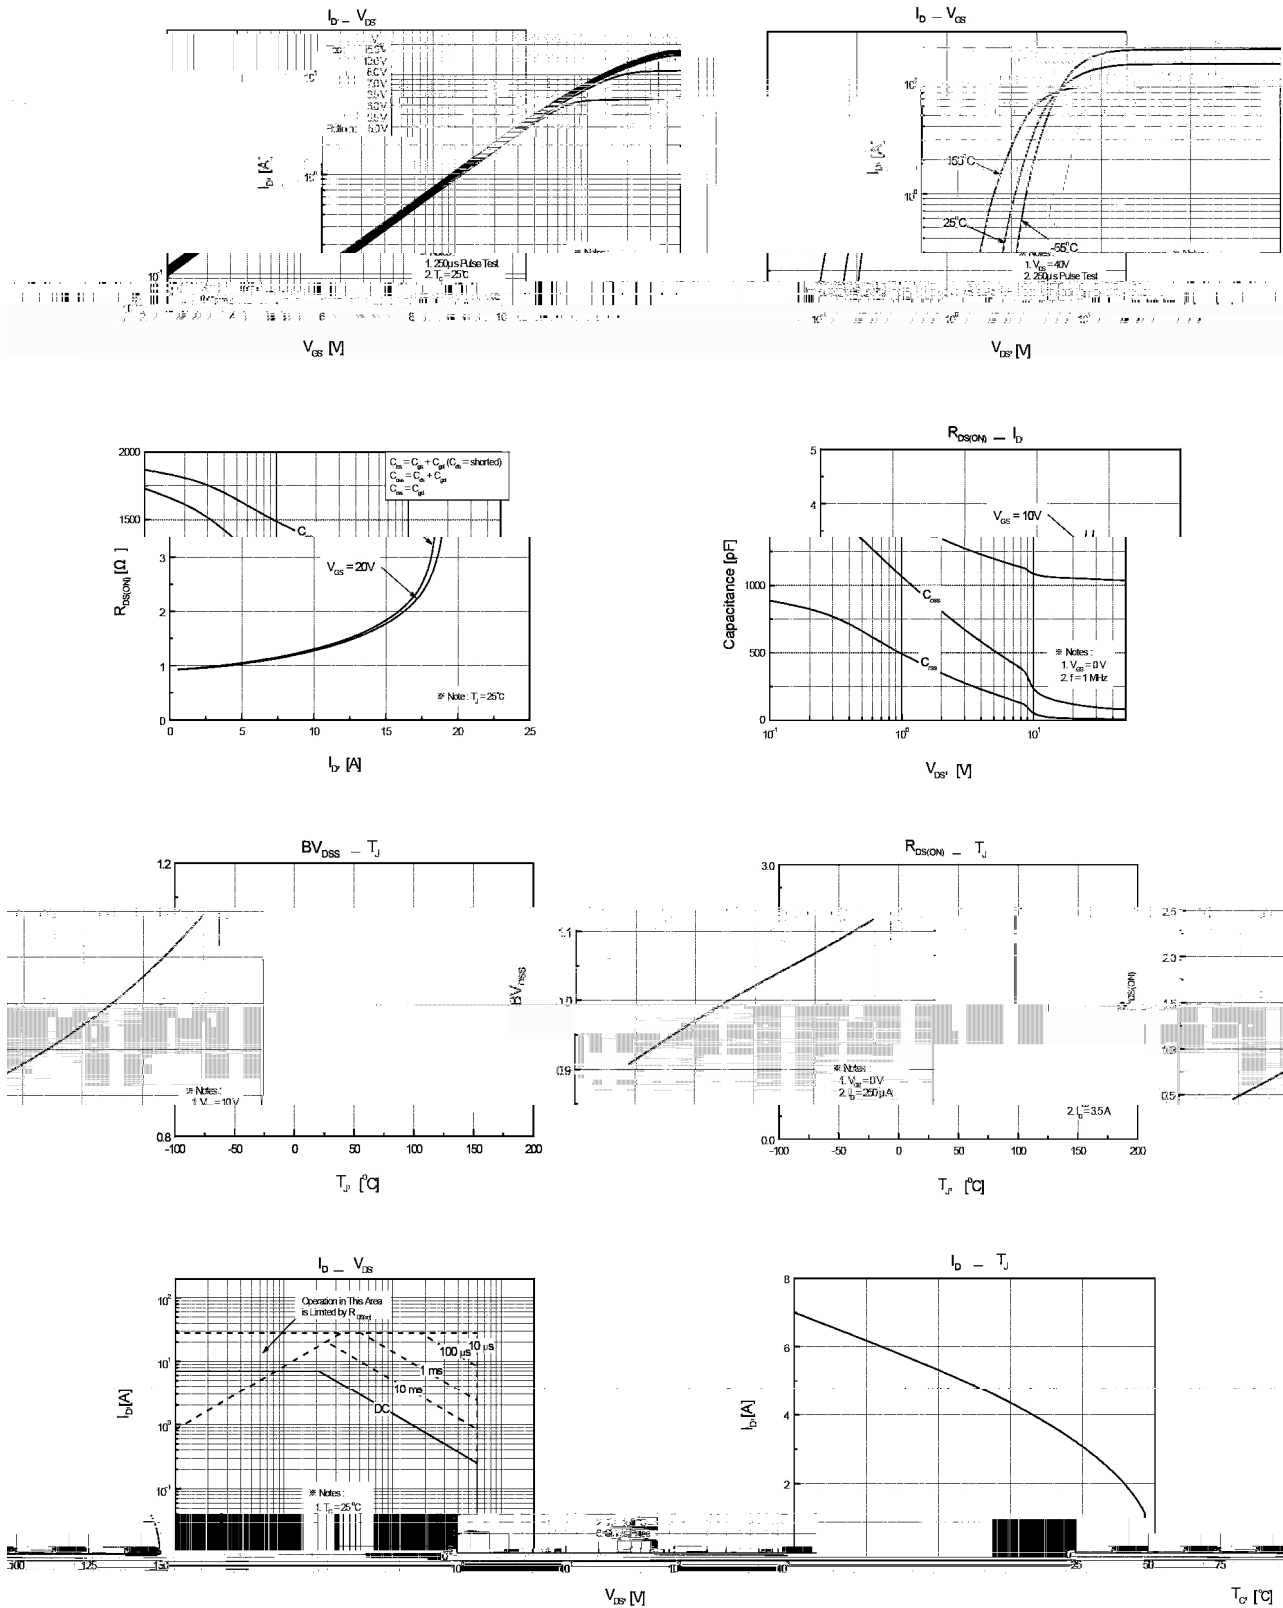


**BRFL7N65**

/ Marking Instructions

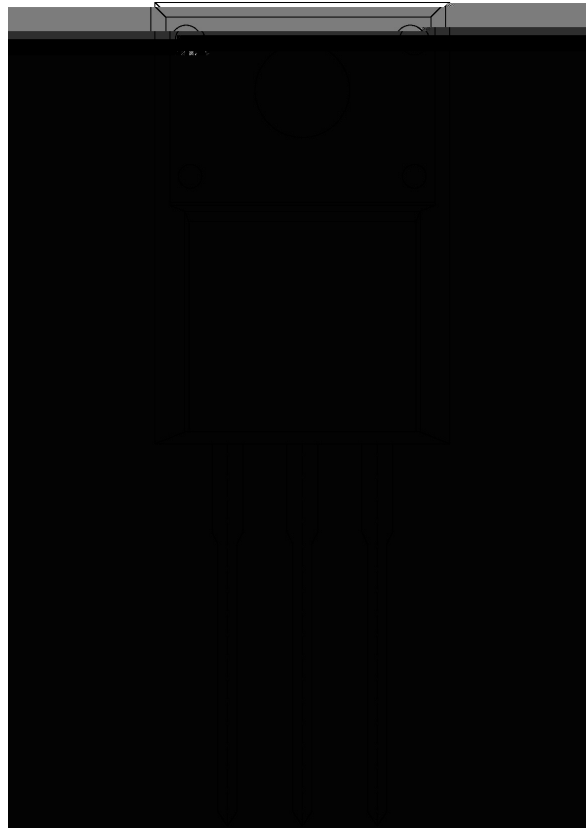

\*\*\*\*

(     ) / Temperature Profile for Dip Soldering(Pb-Free)

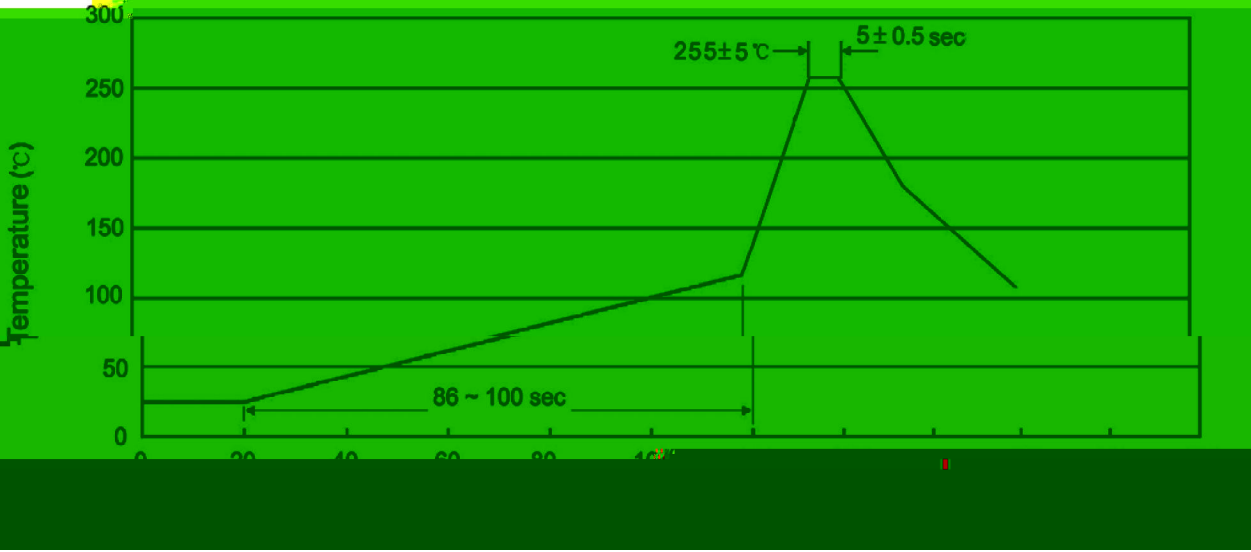

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

| 封装形式 | 包装数量 |      |     |     |     | 包装尺寸 |   |   |
|------|------|------|-----|-----|-----|------|---|---|
|      | 只 套管 | 套管 盒 | 只 盒 | 盒 箱 | 只 箱 | 套管   | 盒 | 箱 |
|      |      |      |     |     |     |      |   |   |

/ Notices