

5 é / Descriptions

TO-247 .> // x Í Ů õ E â ³ } 'ož

Insulated-Gate Bipolar Transistor in a TO-247 Plastic Package.

□ ª / Features

650V k 75A

 $V_{CE(SAT)} = 1.90V(\text{typ.}) @ V_{GE} = 15V, I_C = 75A$

Đ ÷ / Applications

β † ô E ~ o • • • > o • D N ô E ~ o • ä 8 • ¼ È ä ô E ~ ož

Solar Converters, Uninterrupted Power Supply, Welding Converters, Mid to High Range Switching Frequency Converters.

Ã W] Ô • / Equivalent Circuit

• Ů - æ / Pinning

PIN1 y G

PIN 2o•EPAD y C

PIN 3 y E

, M V / Marking

• - ~ ª ¢ ož

See Marking Instructions.

@ f Parameter		... Z Symbol	f > Rating	% y Unit
Collector-Emitter Voltage		V _{CES}	650	V
Gate-Emitter Voltage		V _{GES}	f 30	V
Continuous Collector Current	T _C =25	I _C	150	A
	T _C =100		75	A
Pulsed Collector Current , Limited by T _{Jmax}		I _{CM}	300	A
Continuous Diode Forward Current	T _C =25	I _F	160	A
	T _C =100		80	A
Power Dissipation	T _C =25	P _D	750	W
	T _C =100		375	W
Operating Junction Temperature Range		T _J	-40 to +175	
Storage Temperature Range		T _{STG}	-55 to +150	
Maximum Junction-to-Ambient		R _{JA}	80	/W
Maximum IGBT Junction-to-Case		R _{JC}	0.24	/W
Maximum Diode Junction-to-Case		R _{JC}	0.48	/W

@ f Parameter	... Z Symbol	y i Ú ^ Test Conditions		Â 4 › Min	Á ° › Typ	Â Ý › Max	% y Unit
Collector-Emitter Breakdown Voltage	BV _{CES}	I _C =250uA, V _{GE} =0V		650			V
Zero Gate Voltage Collector current	I _{CES}	V _{CE} =650V, V _{GE} =0V				50	uA
Gate-Emitter Leakage Current	I _{GES}	V _{CE} =0V, V _{GE} = ±30V				f 100	nA
Gate-Emitter Threshold Voltage	V _{GE(th)}	V _{CE} =V _{GE} , I _C =250 A		4.0	5.0	5.5	V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	V _{GE} =15V, I _C =75A	T _J =25		1.90	2.20	V
			T _J =125		2.00		
Total Gate Charge		Q _g g					

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn-On Delay Time	$t_{d(on)}$	$V_{GE}=15V$, $V_{CC}=400V$ $I_C=75A$, $R_G=10$ Inductive Load	TC=25	38		ns
			Tc=150	36		ns
Turn-On Rise Time	t_r		TC=25	118		ns
			Tc=150	100		ns
Turn-Off Delay Time	$t_{d(off)}$		TC=25	267		ns
			Tc=150	300		ns
Turn-Off Fall Time	t_f		TC=25	81		ns
			Tc=150	85		ns
Turn-On Energy	E_{on}		TC=25	4.65		mJ
			Tc=150	4.50		mJ
Turn-Off Energy	E_{off}		TC=25	2.45		mJ
			Tc=150	2.70		mJ
Total Switching Energy	E_{ts}		TC=25	7.10		mJ
			Tc=150	7.20		mJ
Input Capacitance	C_{ies}			2850		pF

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ô ? d • Ž ¢ / Electrical Characteristic Curve

Ø □ =) ¢ / Package Dimensions


, M y f / Marking Instructions

BR
GB75P65AHA

^a ¢ y
BR y , [W A
- (6 ' . ' y ° Z W A
y ÿ D Z W A k š ÿ D Z J

Note:
BR: Company Code
GB75P65AHA: Product Type Code
****: Lot No. Code, code change with Lot No.

G PD t ... • Ž Ć (x /) / Temperature Profile for Dip Soldering(Pb-Free)

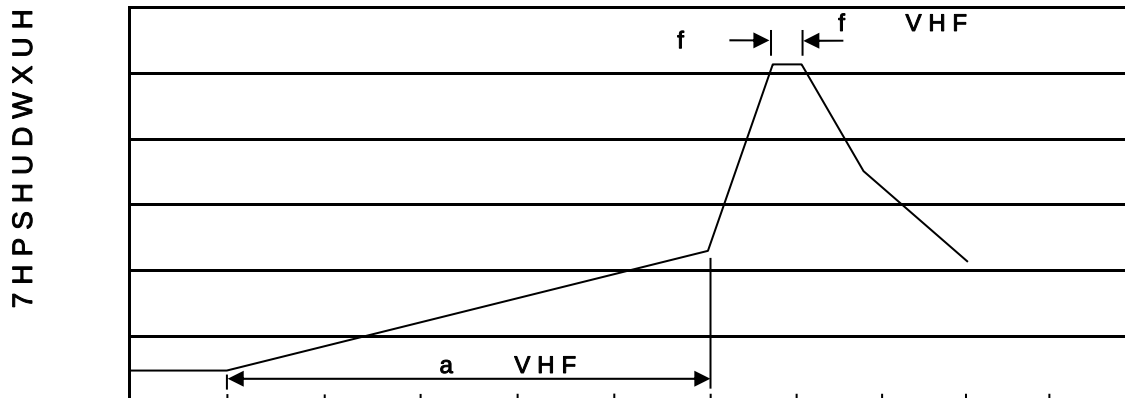

7LPH VHF

a Ć y

1o• Ä ½ "† 25 ½150 - k ž • 60 ½90sec;

2o• Q > "† 255 r5 - k ž • 4 Ò 5 r0.5sec;

3o•D N ò i Ò 0 ,† 2 ½10 - /sec.

Note:

1.Preheating:25~150 - , Time:60~90sec.

2.Peak Temp.:255 r5 - , Duration:5 r0.5sec.

3. Cooling Speed: 2~10 - /sec.

ÂD /Că p - »] / Resistance to Soldering Heat Test Conditions

"† y 270 r5 -

ž • y 10 r1 sec.

Temp.:270±5

Time:10±1 sec

G P á / Packaging SPEC.

ì' x / TUBE

Package Type 7>û ~ E	Units ;>û !H					Dimension ;>û p . (unit Åmm³)		
	Units/Tube /•1×	Tubes/Inner Box •1× /-	Units/Inner Box /-	Inner Boxes/Outer Box - /1ç	Units/Outer Box /1ç	Tube•1×	Inner Box	Outer Box
TO-247	30	15	450	5	2250	520×44×6	580×158×55	595×300×178

„Đ y f / Notices

Î† U ^ ñ Ä ' Î @ I c - ² Á Ò Ć ³ Ø o ž

All information provided in this document is subject to legal disclaimers.