

[illegible]




/ Absolute Maximum Ratings(Each Transistor,Ta=25)

			℃
		~	℃

/ Electrical Characteristics((Each Transistor,Ta=25)




/ Electrical Characteristic Curve

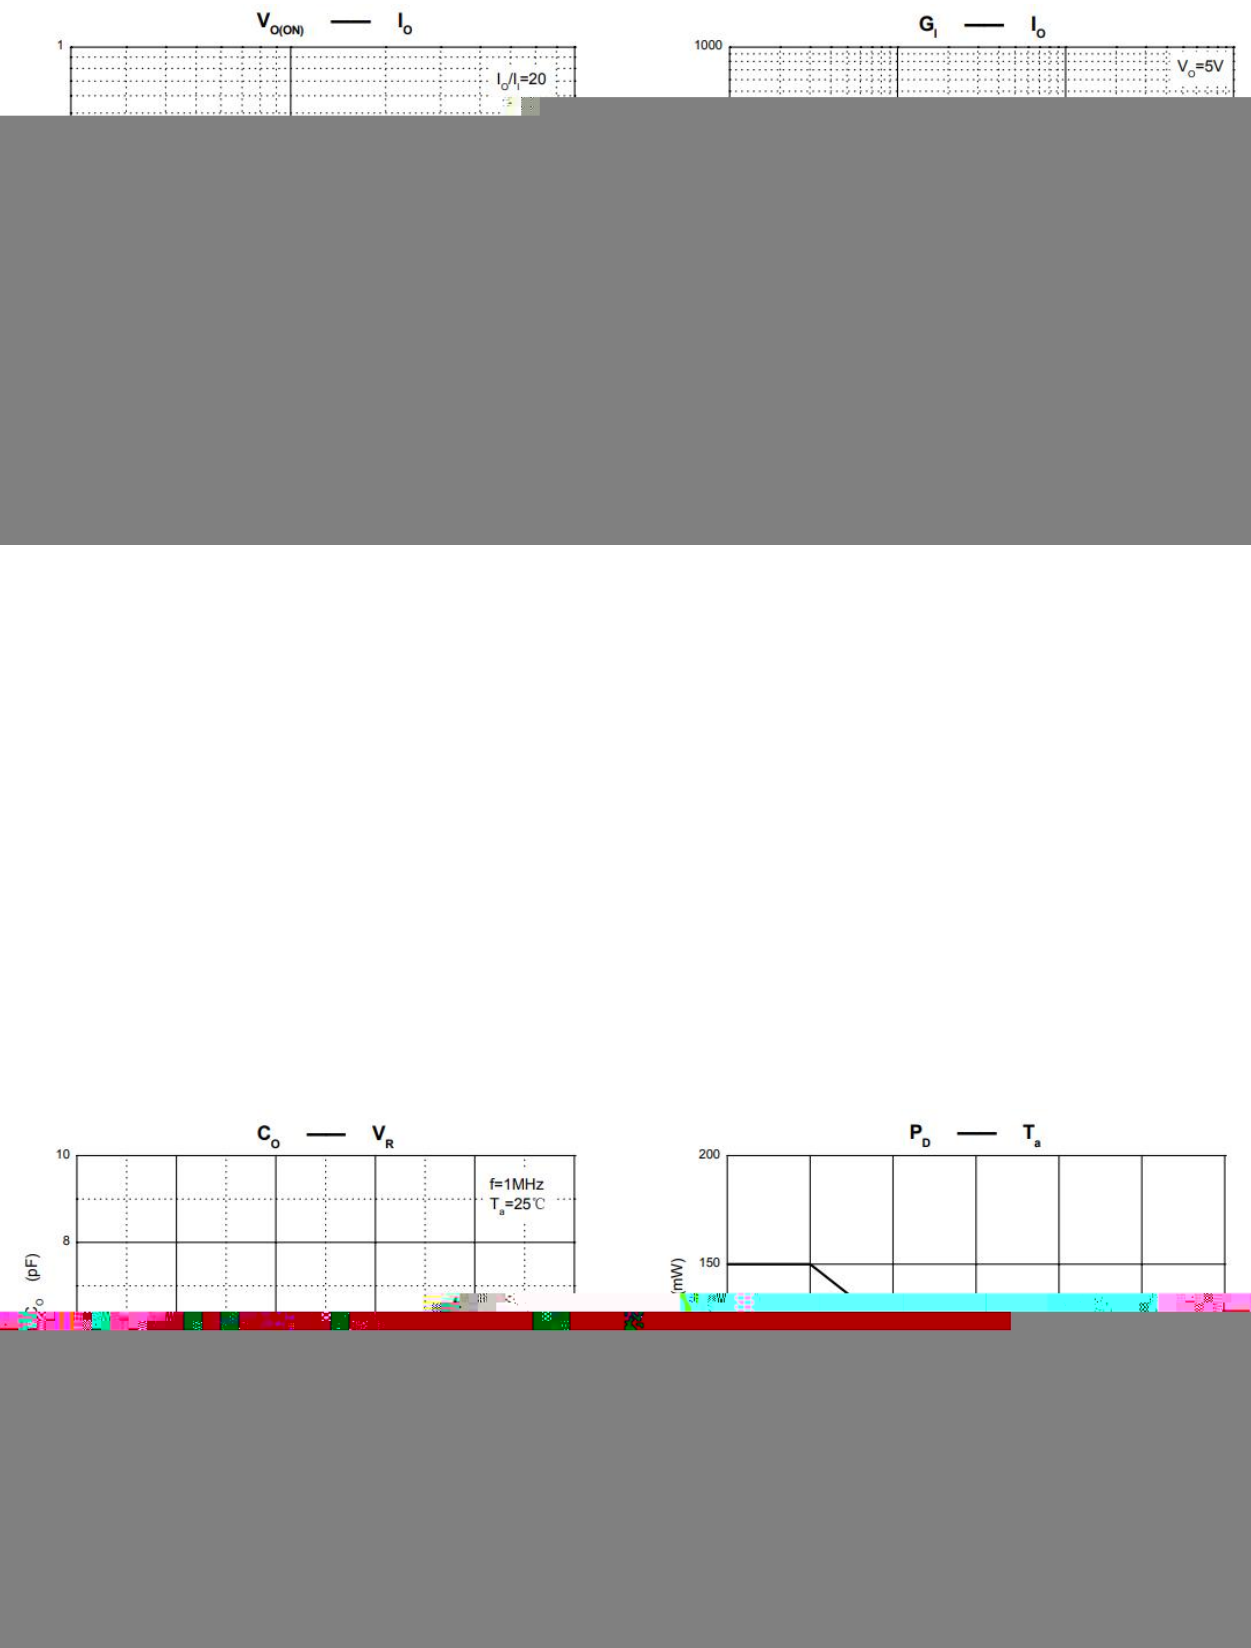




/ Package Dimensions

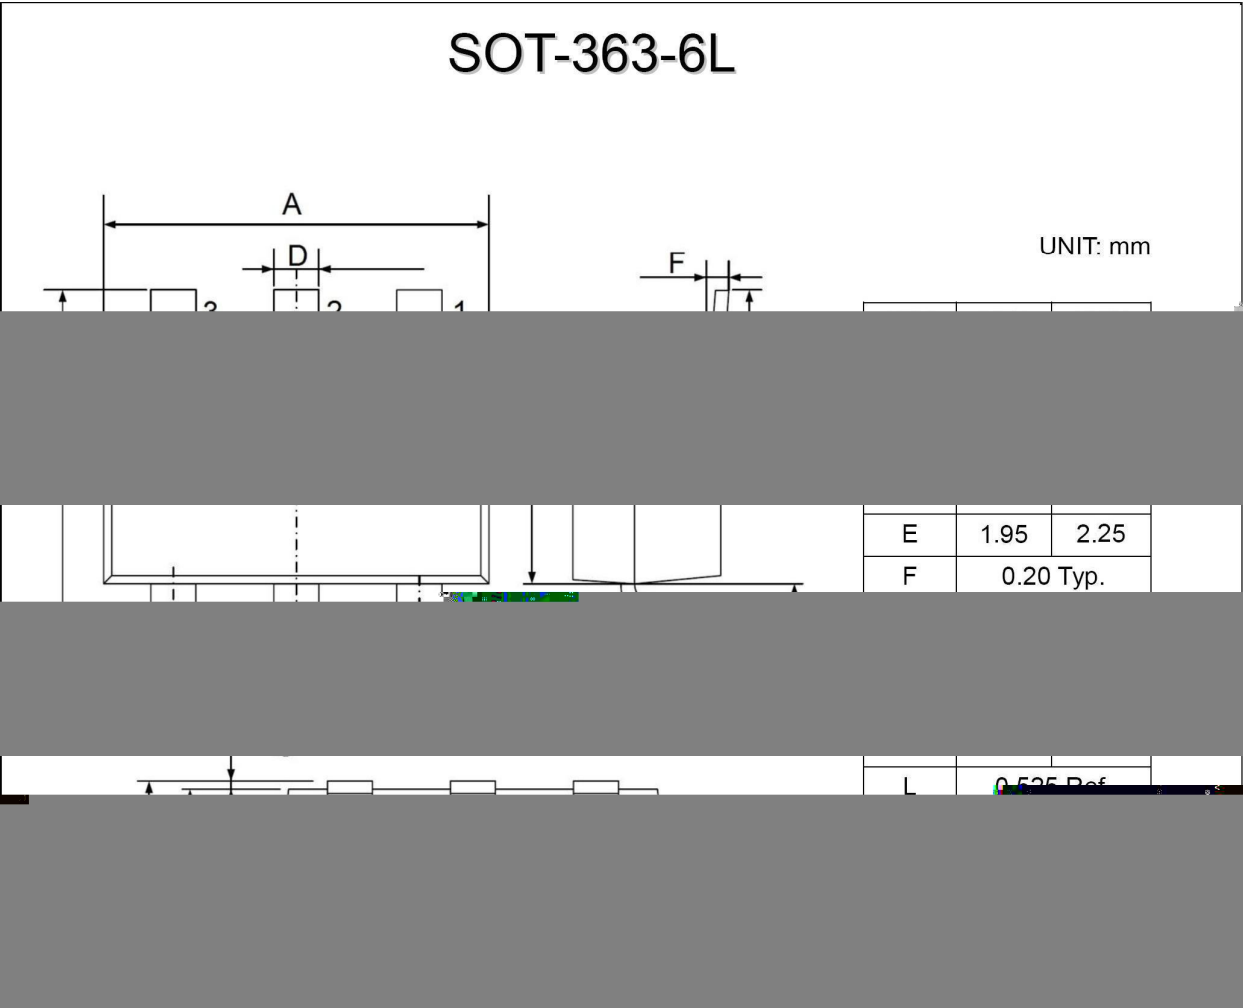



/ Marking Instructions

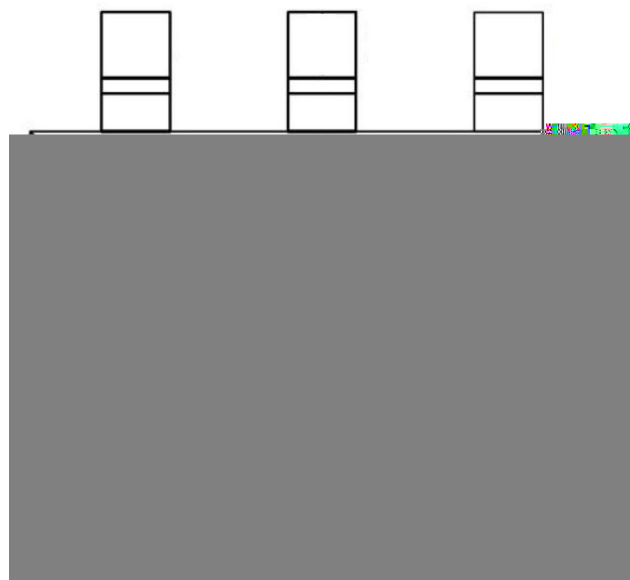

● " 1 "

H211

***.


● "1" Pin

H211

***.



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

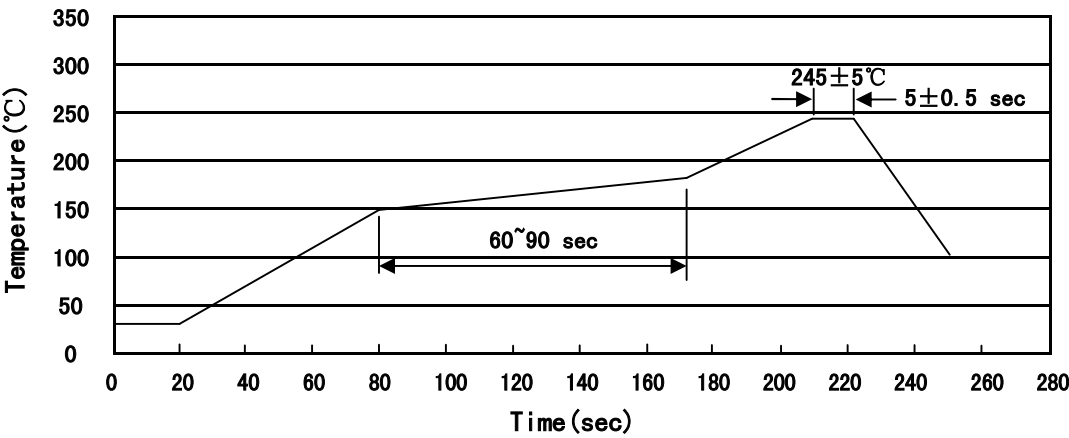

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-363	3,000	10	30,000	6	180000	7" ×8	180×120×180	390×385×205

/ Notices