


/ Descriptions

VRW056 SQS


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

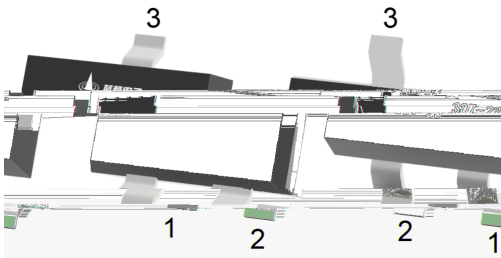

/ h_{FE} Classifications & Marking

--	--





/ Absolute Maximum Ratings(Ta=25)

		~	

/ Electrical Characteristics(Ta=25)

		μ				
						μ
						Ω


/ Electrical Characteristic Curve

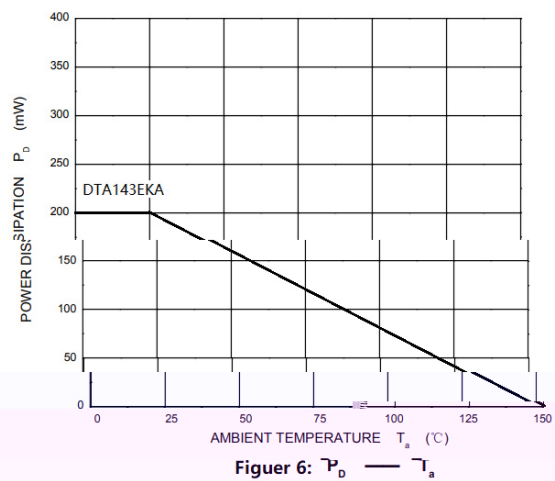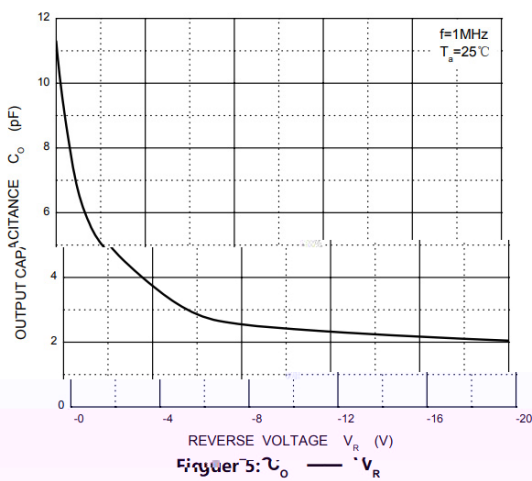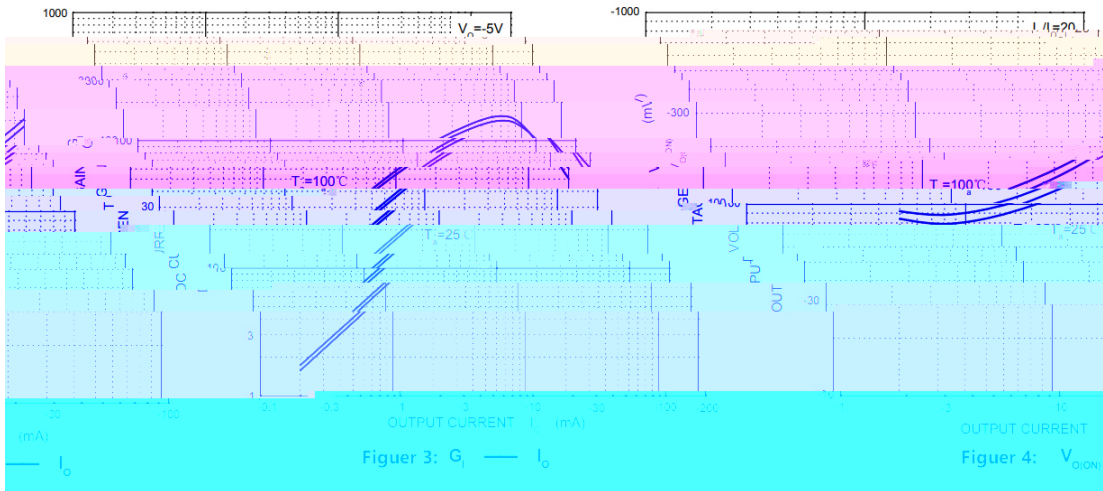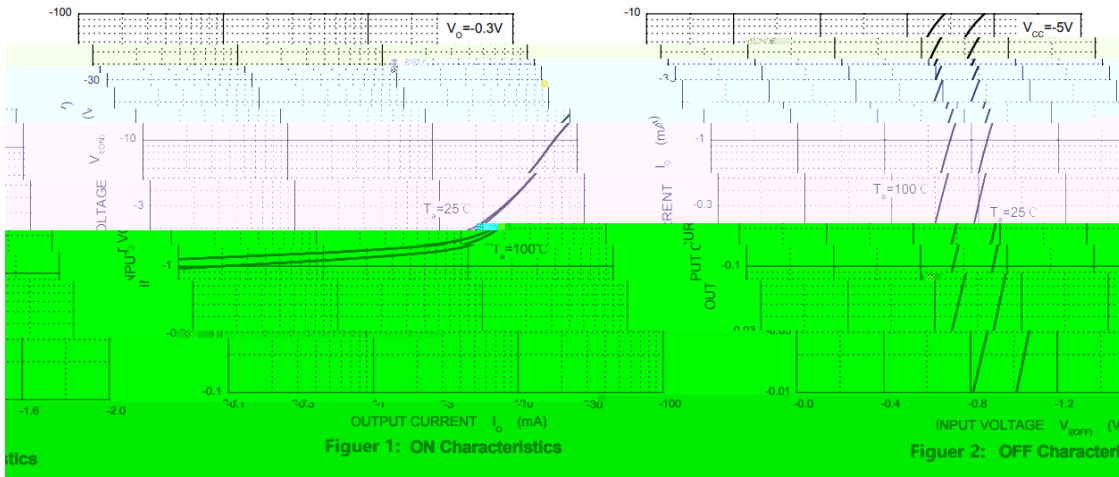


/ Package Dimensions

SOT-23

单位：mm

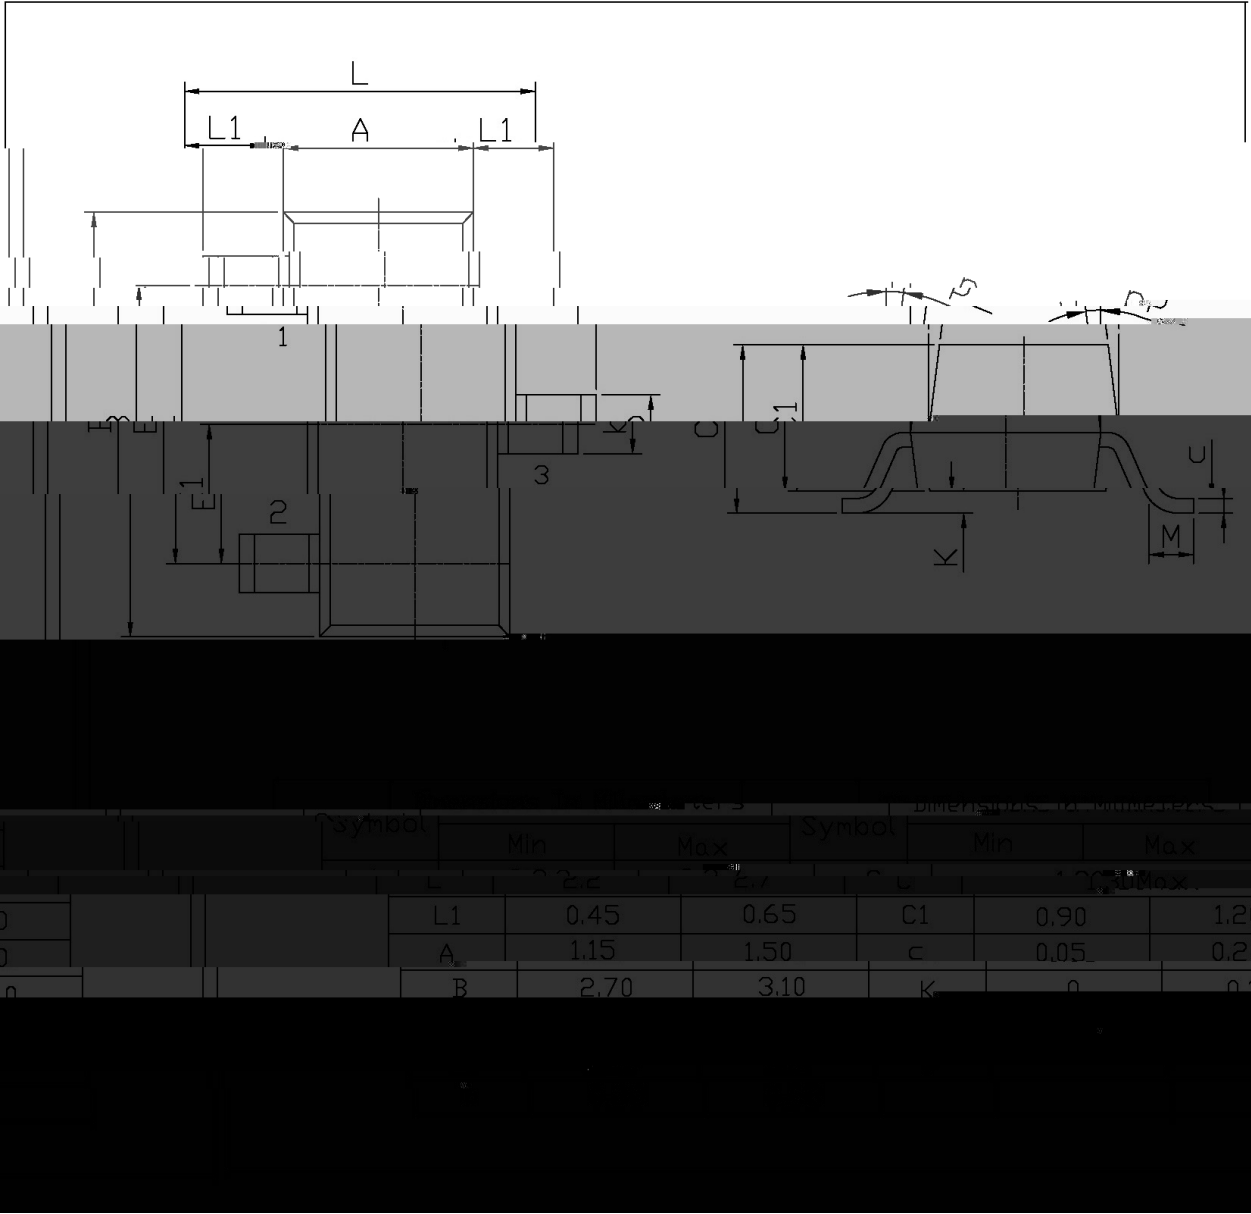


/ Marking Instructions

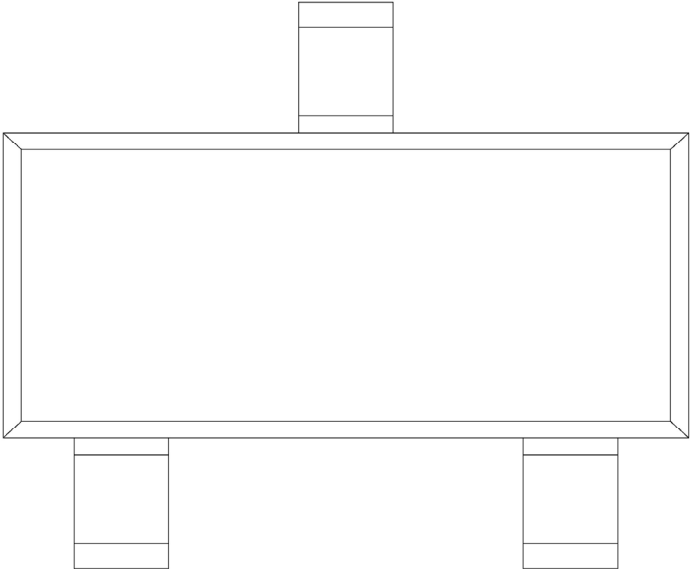

K

K

() /

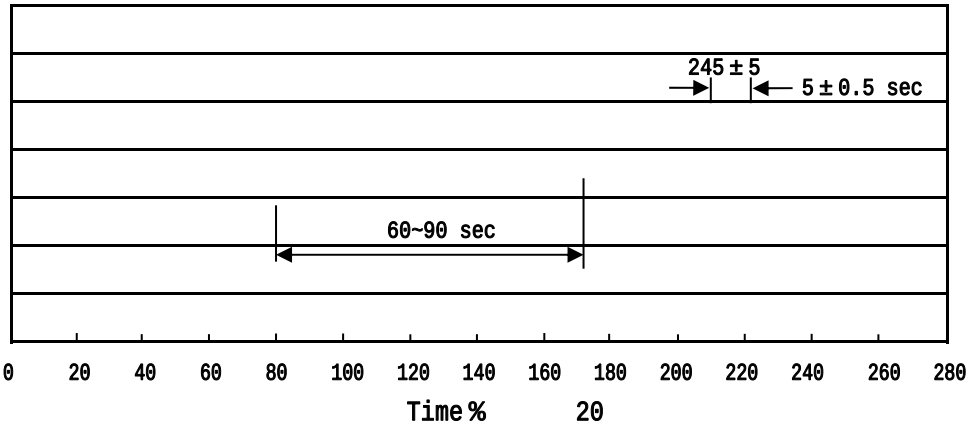

$\frac{3}{8}$ $\frac{3}{8}$

2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2

$\frac{3}{8}$ $\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices