


VRW0656 QSQ

Vzlwfkqlqj dssolfdwlrqv/ lqwhuidfh flufxlv dqg gulyhu flufxlv dssolfdwlrqv

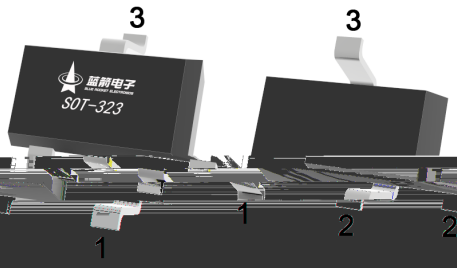

/ hFE Classifications & Marking


--	--

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

						μ
						Ω


/ Electrical Characteristic Curve

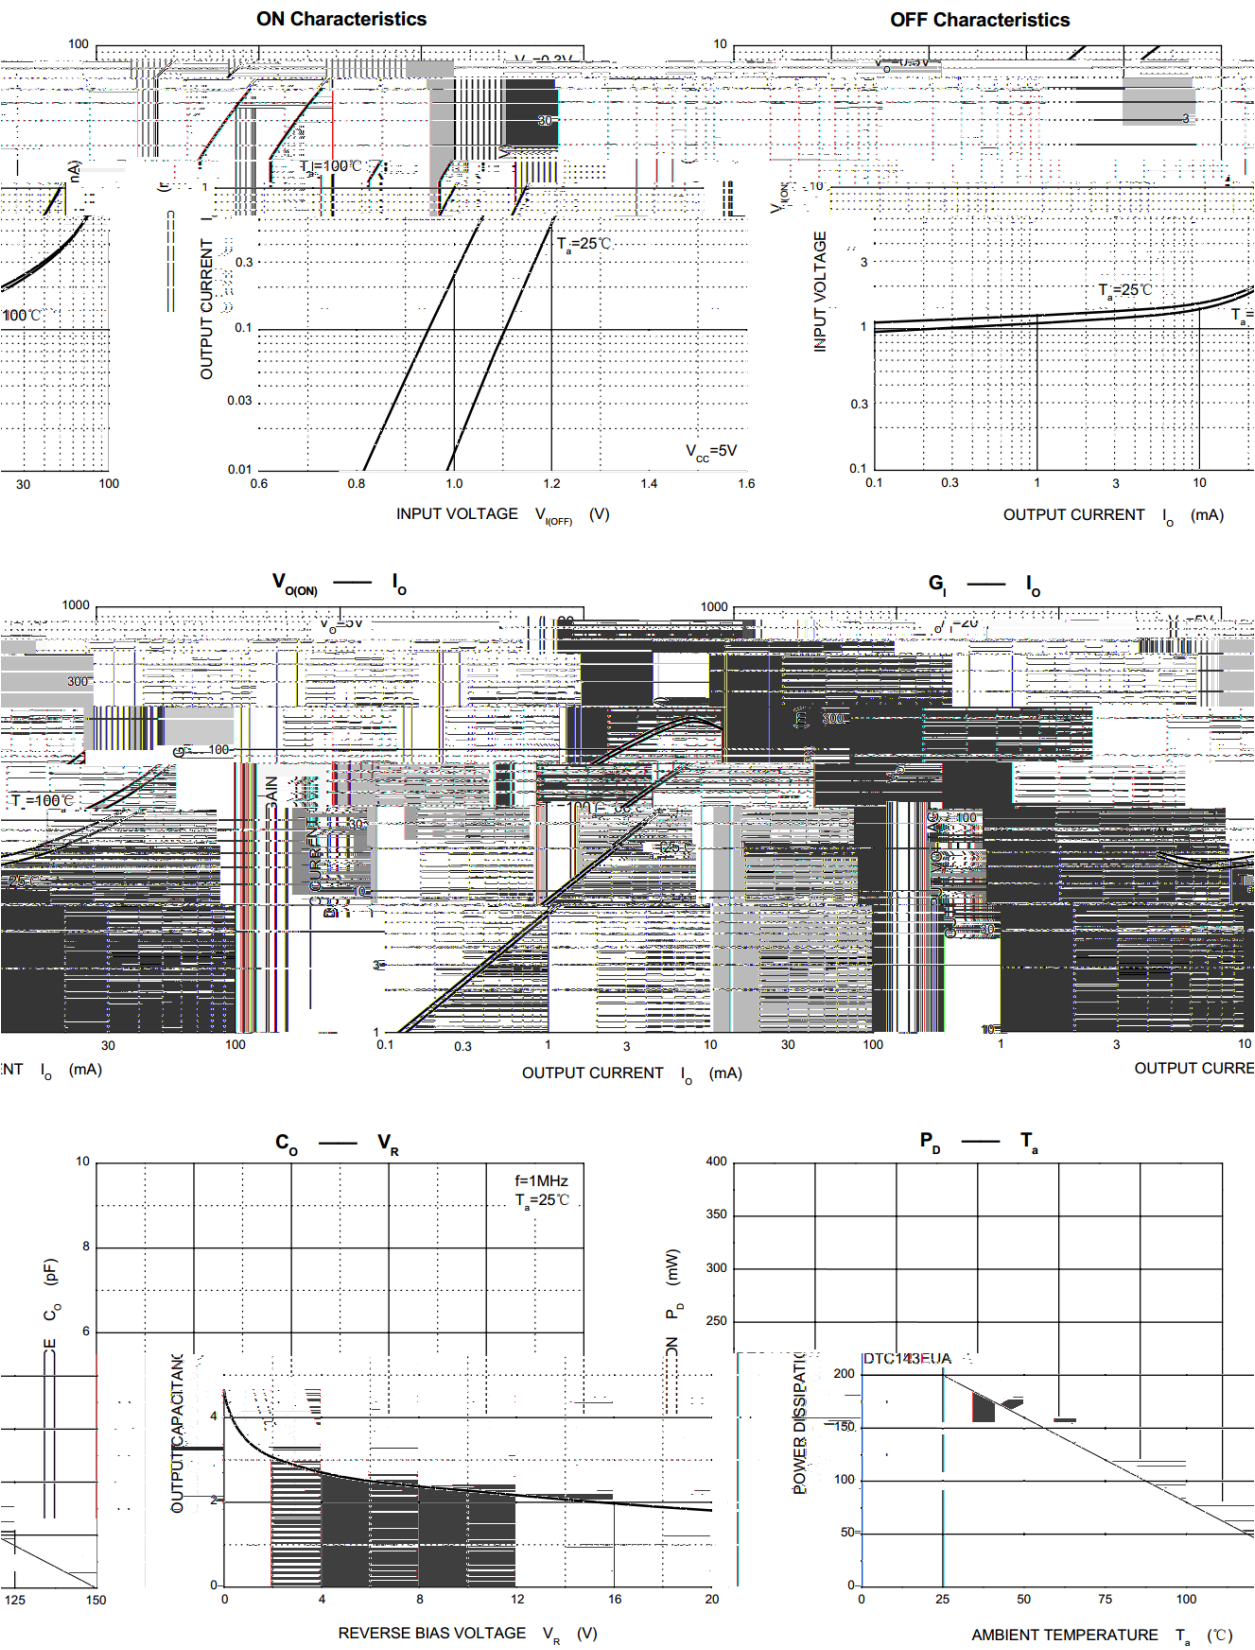


/ Package Dimensions

SOT-323

单位: mm

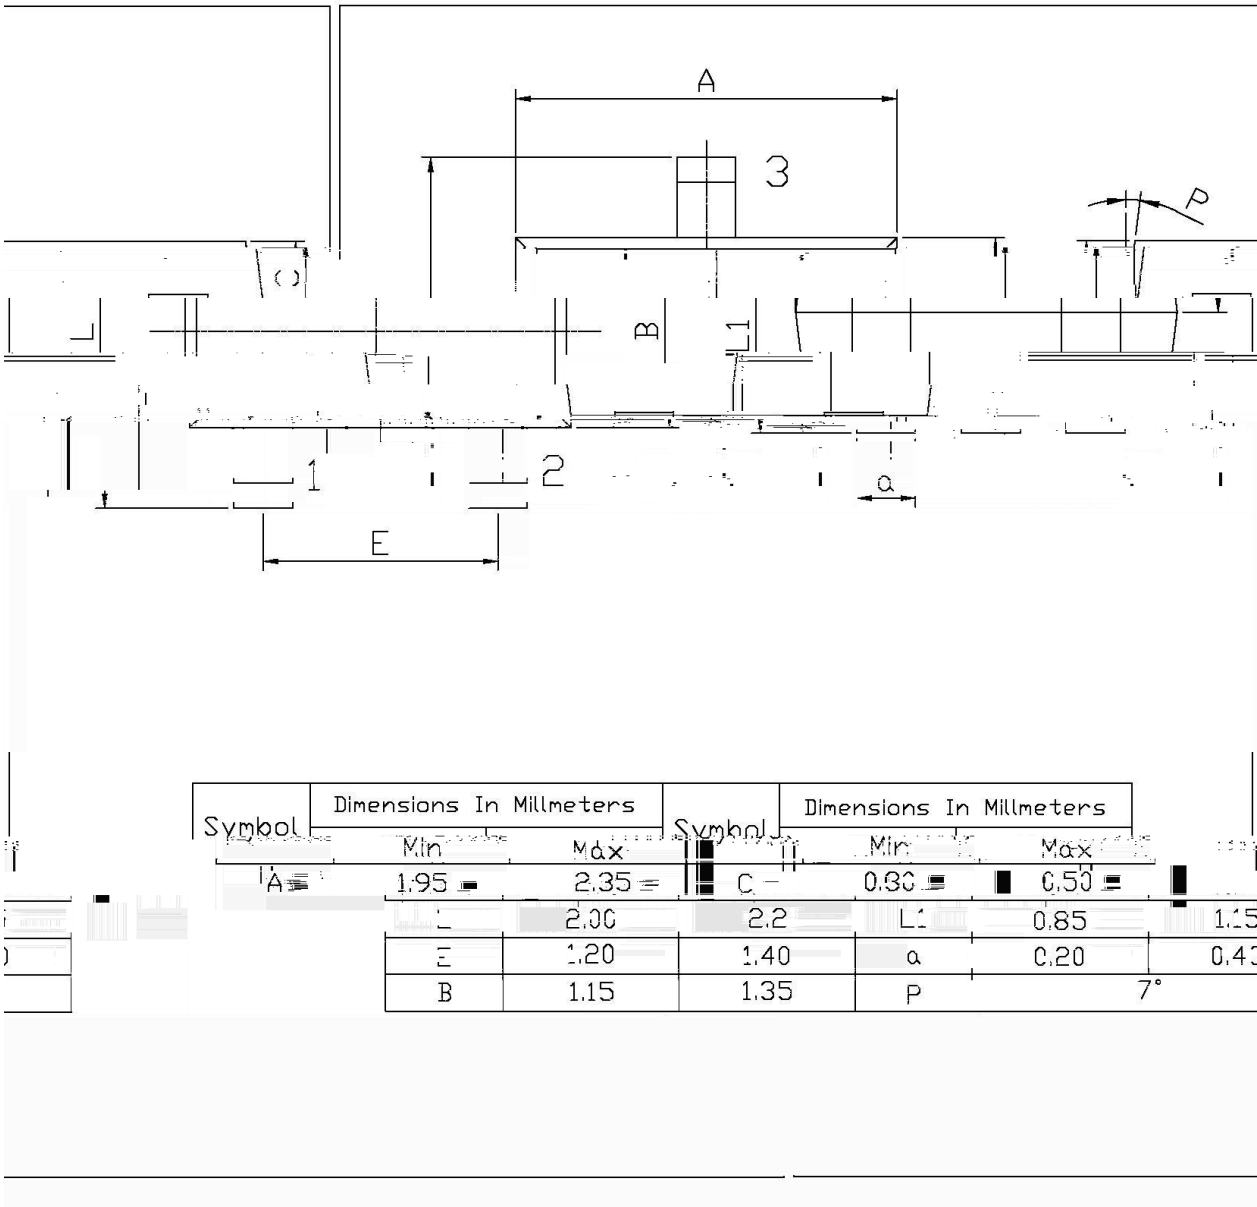


/ Marking Instructions

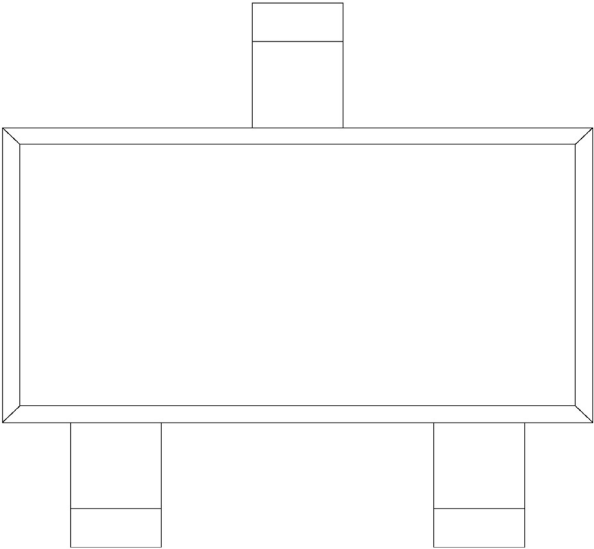

K

K

() /

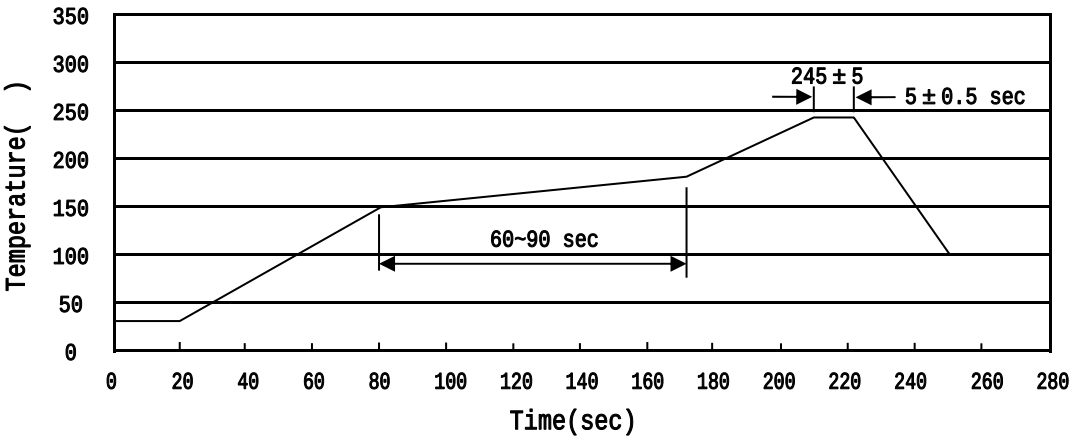

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

/ Resistance to Soldering Heat Test Conditions

2 3/8 2

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices