

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------

3AEM f

Fig.1 Average Rectified Output Current Derating Curve

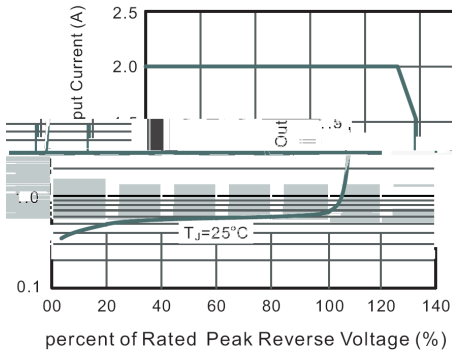


Fig.2 Typical Reverse Characteristics

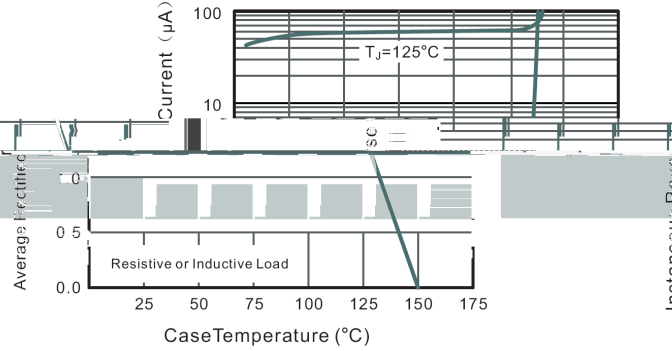


Fig.4 Typical Junction Capacitance Characteristics

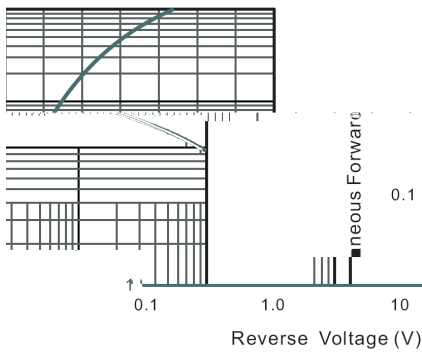


Fig.3 Typical Instantaneous Forward Characteristics


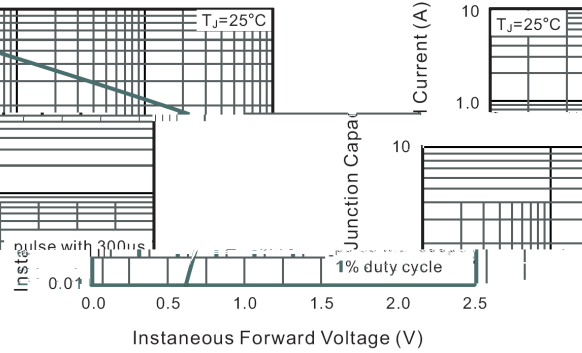



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

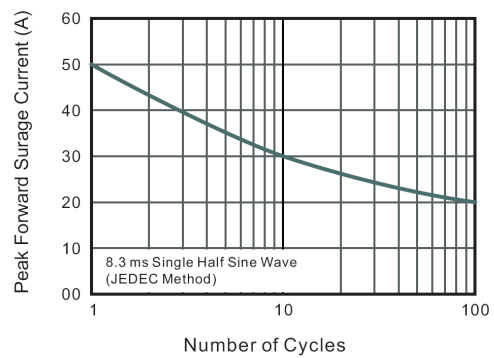

Rev.A Sep.-2017


u È Ø L f

ABS/LBF

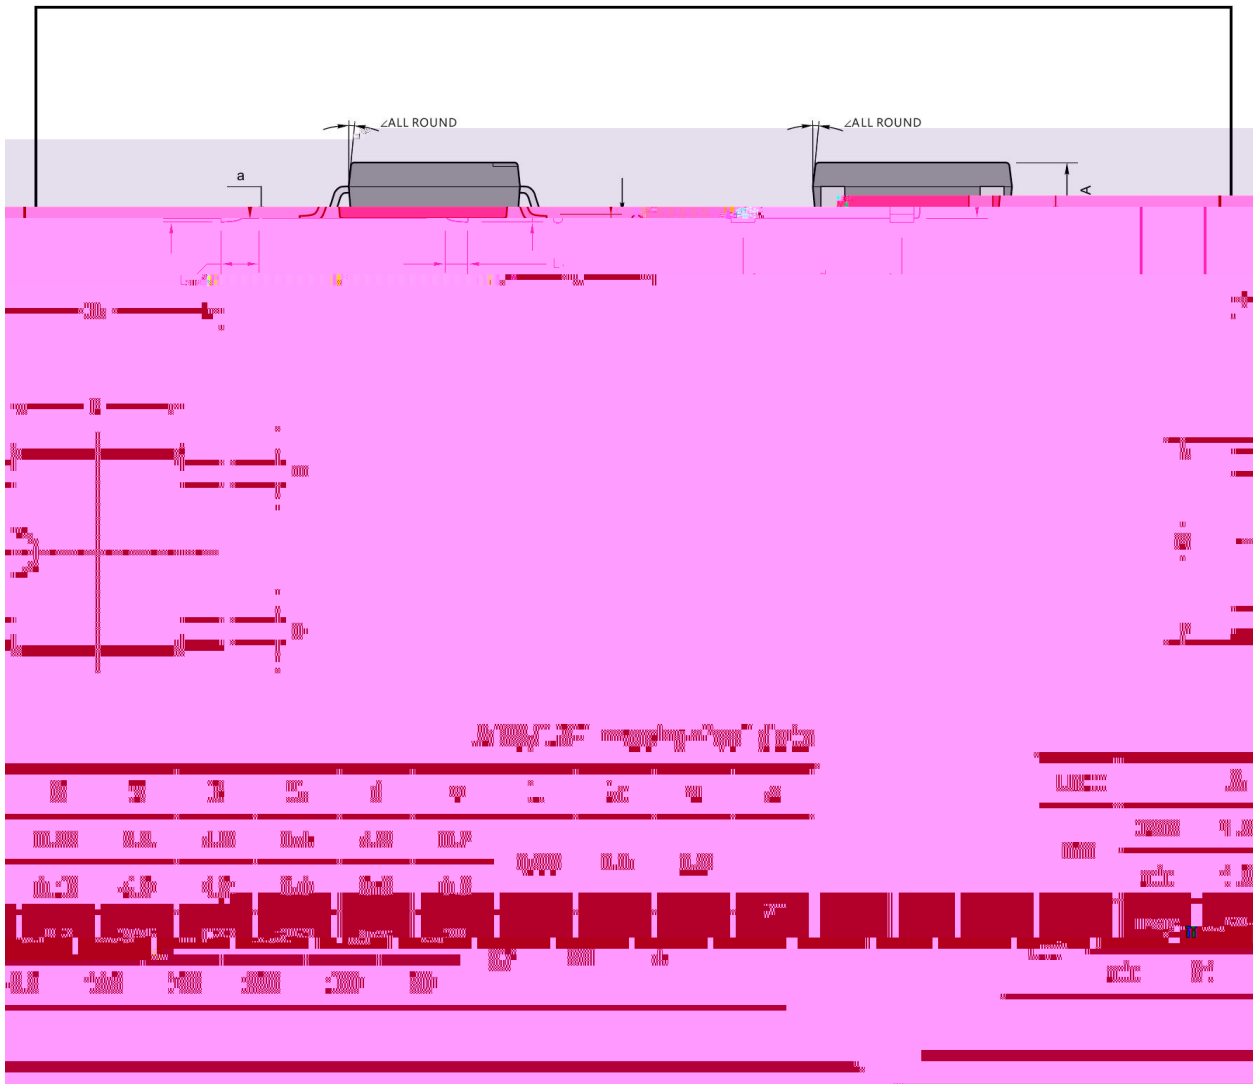


Marking

Type number	Marking code
FTB1S-20	F20T1
FTB2S-20	F20T2
FTB4S-20	F20T4
FTB6S-20	F20T6
FTB8S-20	F20T8
FTB10S-20	F20T10

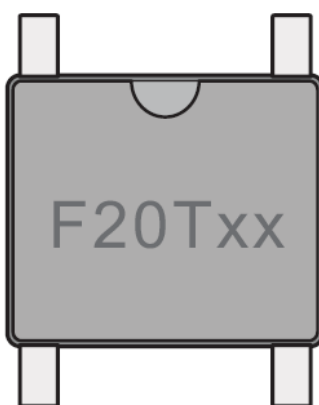

F20Txx

4. 符号

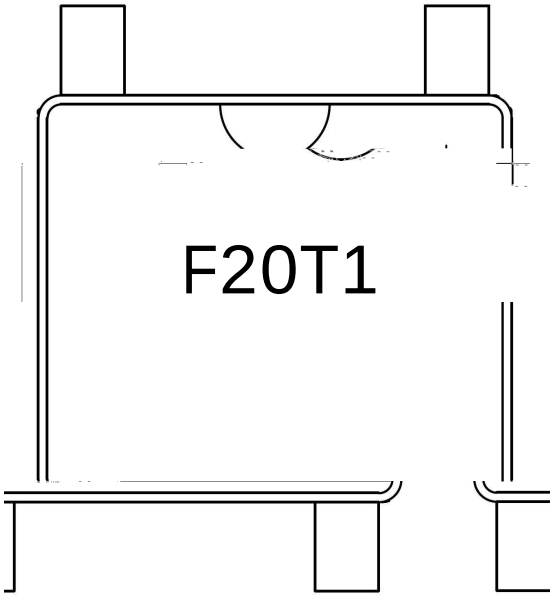

F20T1

**** 1 * 3 *

Note:


F20T1 Product Type Code

**** Lot No. Code The 1st * means:YM Code The last 3 * means:little Lot No Code

Rev.A Sep.-2017

温度曲线图

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

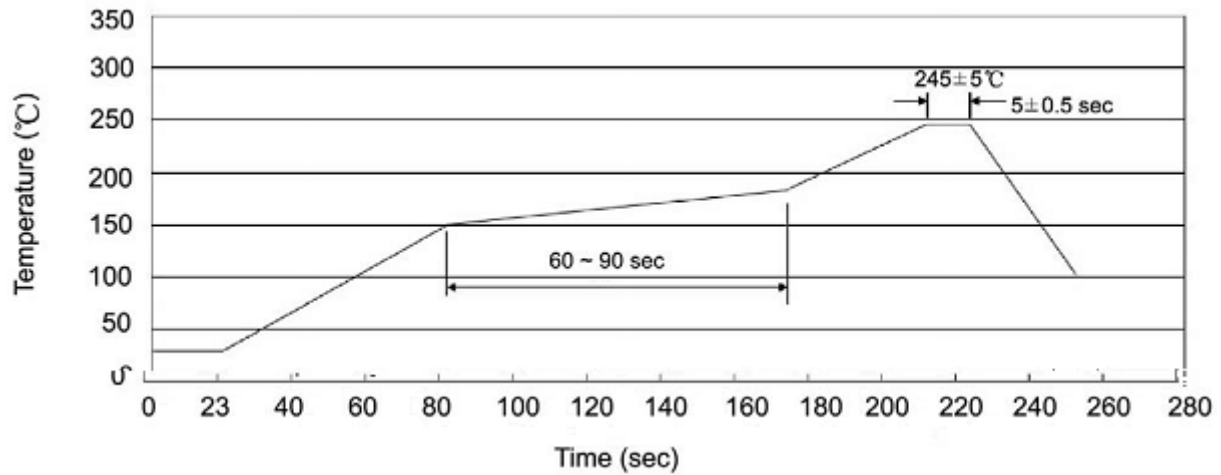

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | | 2 | 10 /sec. | 3. Cooling Speed: 2~10 /sec. |

温度曲线图

260±5	10±1 sec.	Temp.:260±5	Time:10±1 sec
-------	-----------	-------------	---------------

温度曲线图

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
ABS/LBF	5000	2	10000	5	50000	13 ×15	336X336X40	380X335X366

温度曲线图