

/ Descriptions


TO-92LM NPN

/ Features

KTA1273

/ Applications

/ Equivalent Circuit



/ Pinning









/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

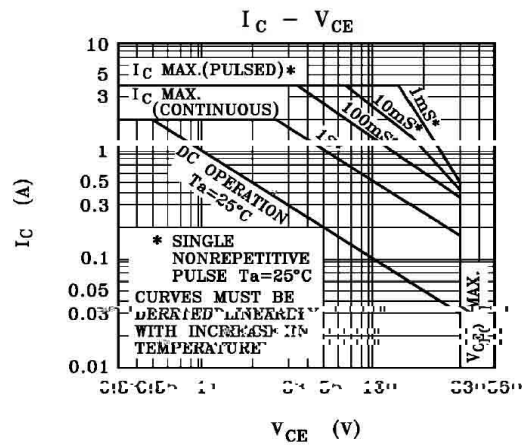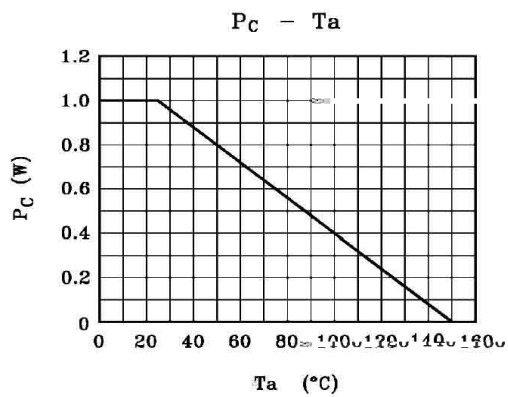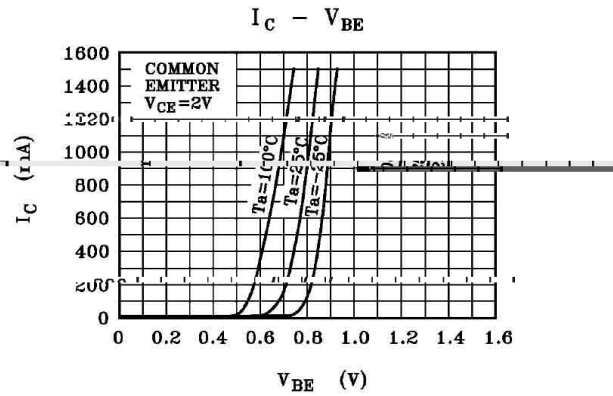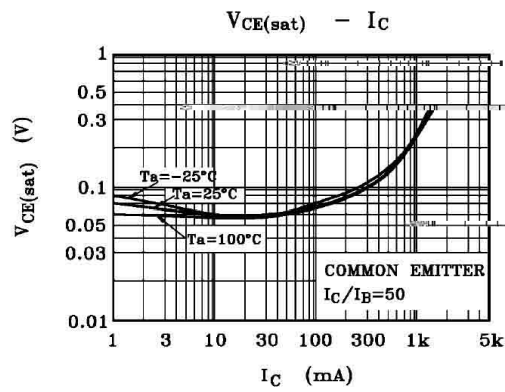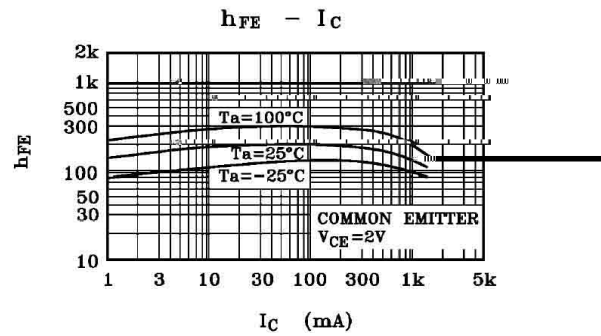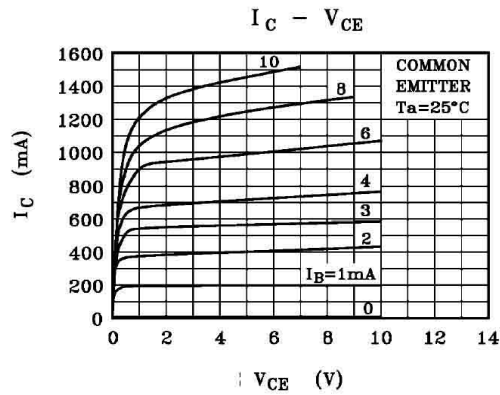


/ Package Dimensions

T0-92LM

Unit: mm

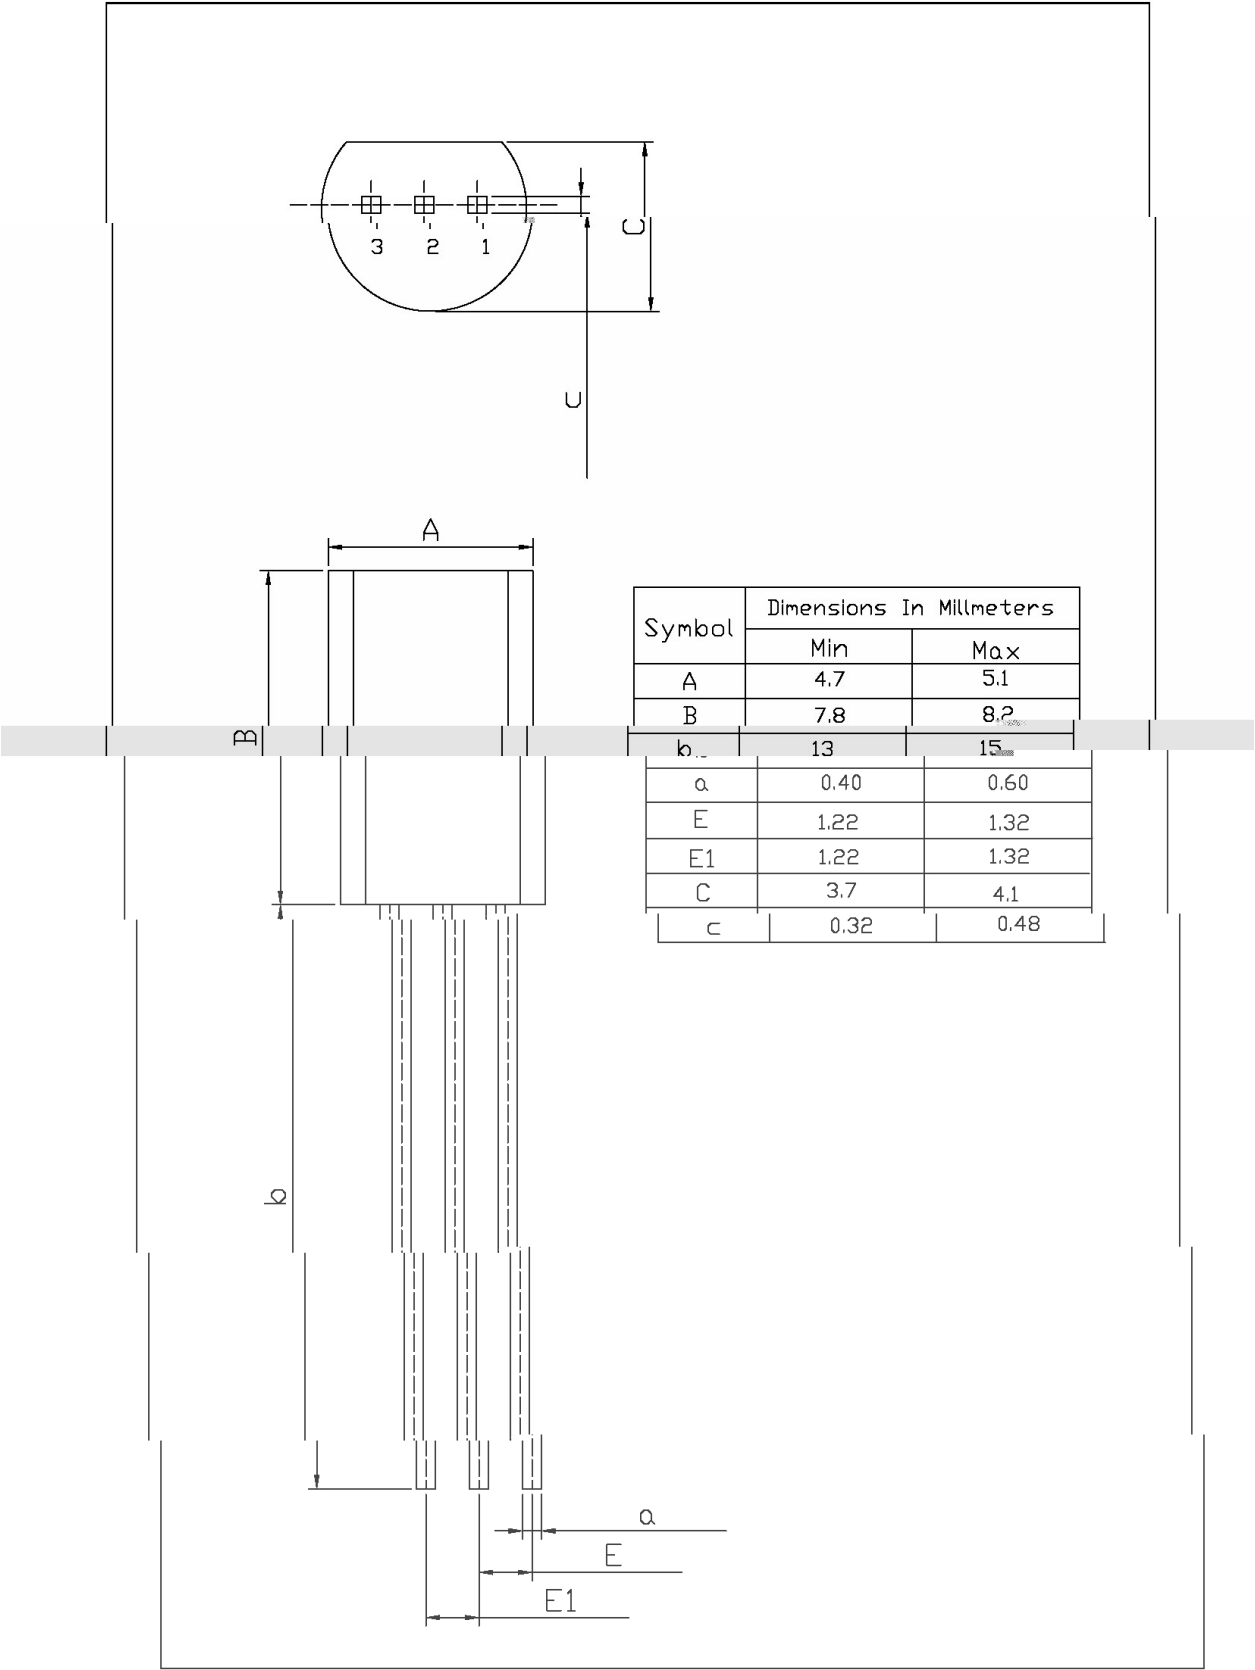

/ Marking Instructions

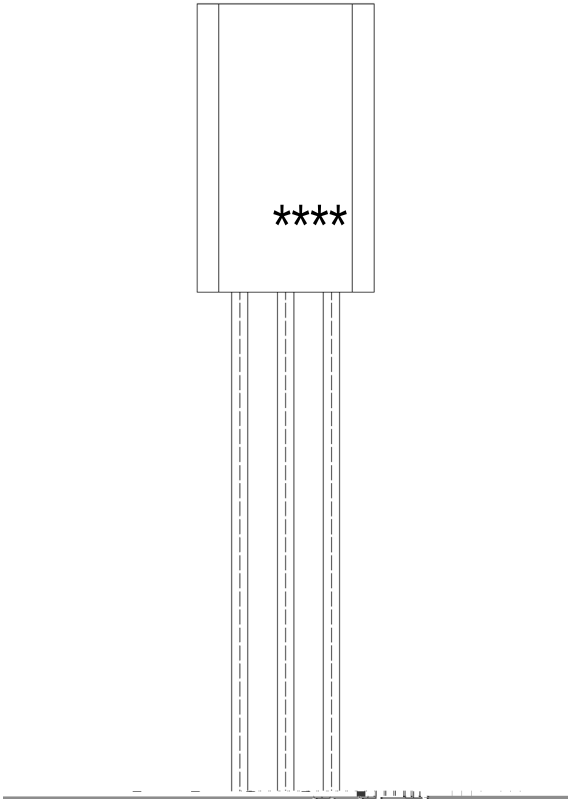

BR:
C3205
O: h_{FE}

$\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92LM	1,000	8	8,000	5	40,000	135×190	237×172×102	560×245×195

封装形式	包装数量					包装尺寸
	Units/tape 只/纸带	Tape/Inner Box 纸带/盒	Rows/Inner Box 纸带层/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	