


“Y / Descriptions

• È / Features

v / Applications

∏ ¨ ǻ ≈ / Equivalent Circuit



ǻ ∕ ǔ̃ / Pinning



₪ ₪ Ć / Marking

--	--


绝对最大值 / Absolute Maximum Ratings(Ta=25 ℃)

μ			
μ			


电 学 特 性 / Electrical Characteristics(Ta=25 ℃)

						μ
		μ				

电 气 特 性 曲 线 / Electrical Characteristic Curve

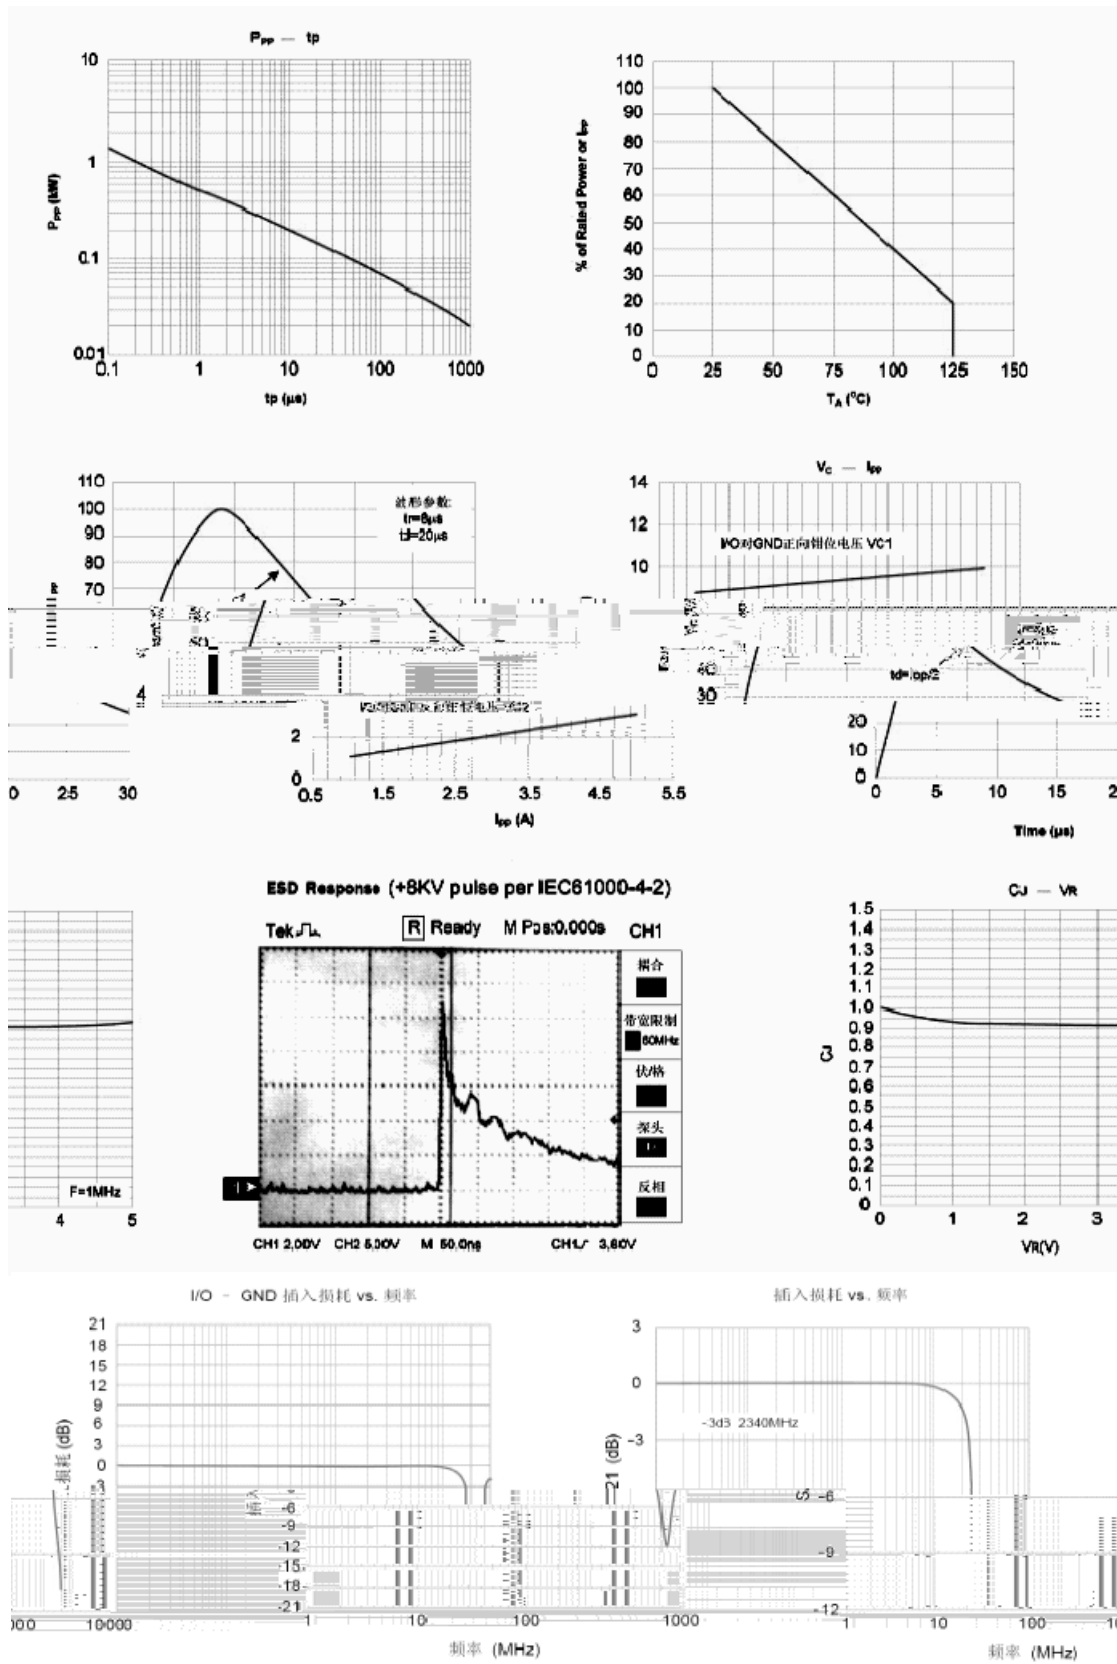

Package Dimensions

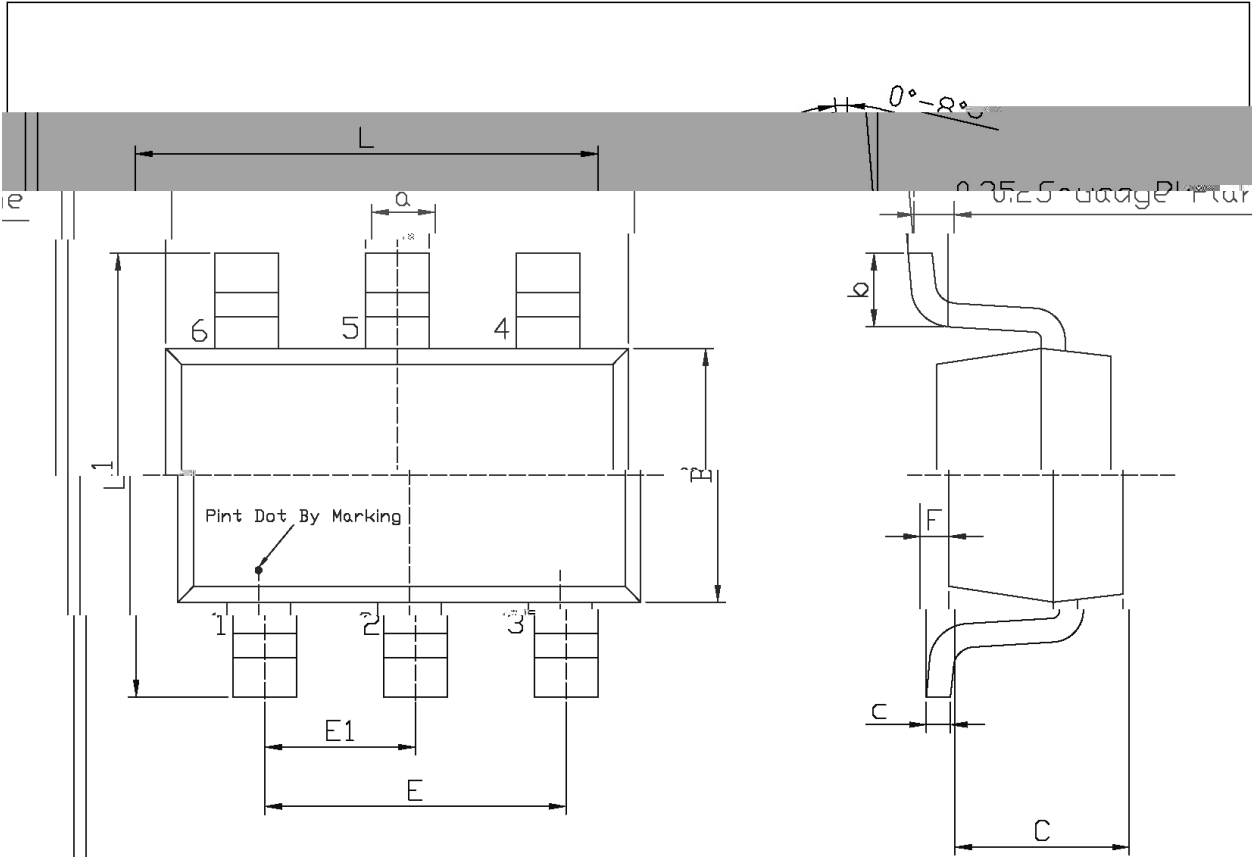


Unit: mm

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
L	2.80	3.00	E1	0.85	1.05
B	1.50	1.70	a	0.35	0.50
C	0.90	1.30	c	0.10	0.20
E	1.80	2.00	F	0	0.15


SUT23-6

4. 符号 / Marking Instructions

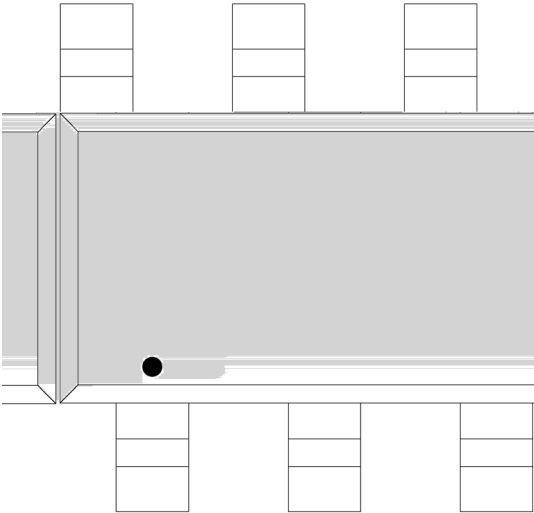

*

温度特性 / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

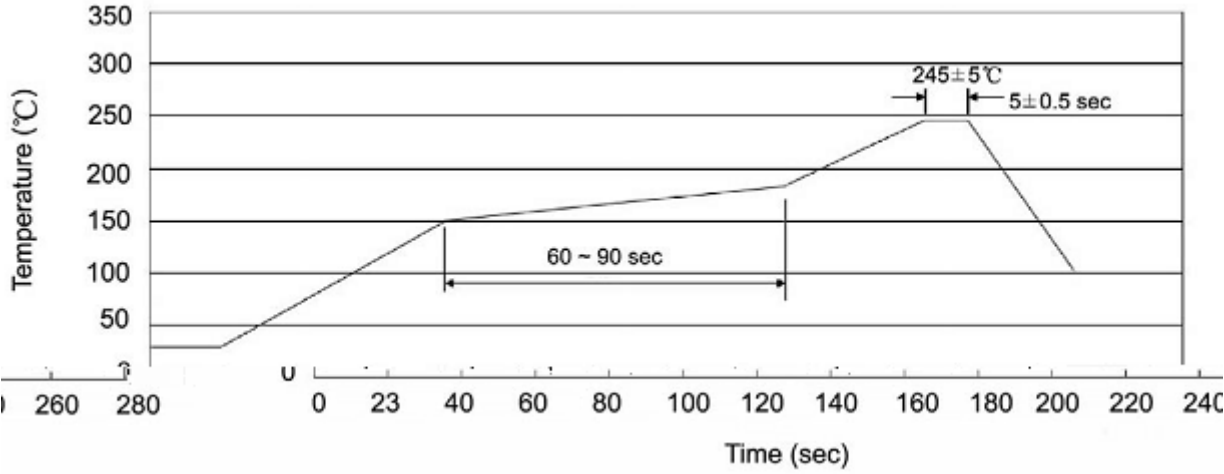

电阻焊 / Resistance to Soldering Heat Test Conditions

包装 / Packaging SPEC.

注意事项 / Notices