

/ Descriptions

TO-252


/ Features

/ Applications


OR-ing

DC-DC

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

		×	
			℃
		~	℃

/ Electrical Characteristics(Ta=25)


		℃				
		℃				
		℃				
		℃				
		℃				
		℃				
	()	℃				
		℃				

- :
1.

°
2.


/ Electrical Characteristic Curve





Strong/Lit. Max. Lit. Res.		Dimensions: Di. int. Inverse		Adapt	
in	Max	Symbol	Min	Max	Symbol
95%	6.25%	A	2.25%	2.43%	E
94%	2.3%	B	0.95%	1.25%	F
4.73%		b	0.50%	0.70%	G
9.95%		b1	0.45%	0.55%	L1
1.75%		C	0.45%	0.55%	L2
0.90%		D	6.45%	6.75%	L3
0.1%	5.10%	K	0.00%	0.10%	

/ Marking Instructions

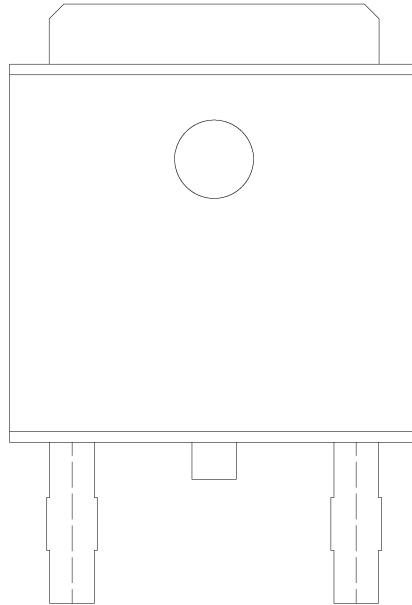

BR


LV20100

CT:

LV20100

CT:

() /

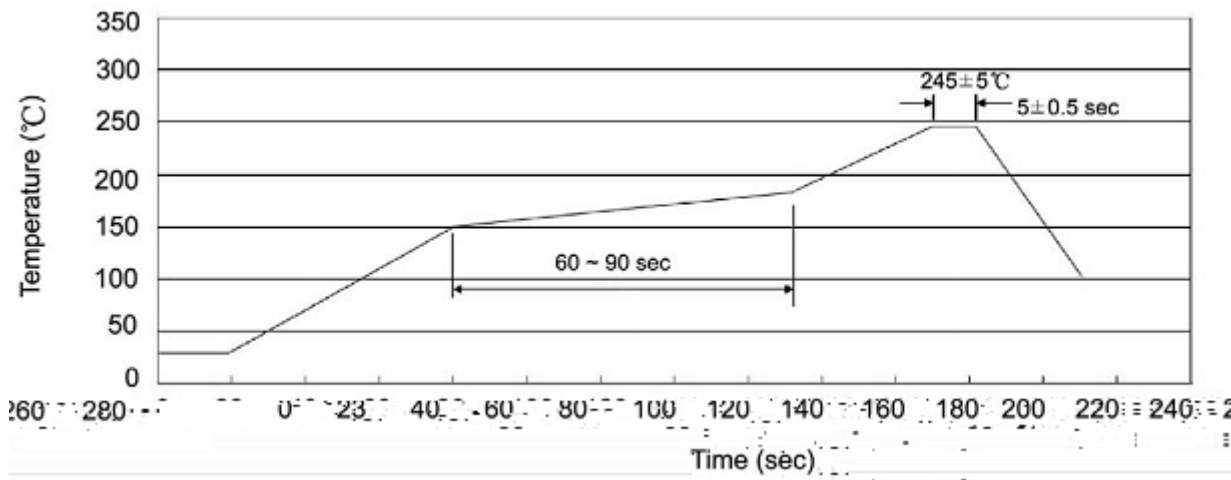

说明：