


TO-220

OR-ing

DC-DC



/ h_{FE} Classifications & Marking






/ Absolute Maximum Ratings(Ta=25)

	θ		

/ Electrical Characteristics(Ta=25)

						μ


/ Electrical Characteristic Curve

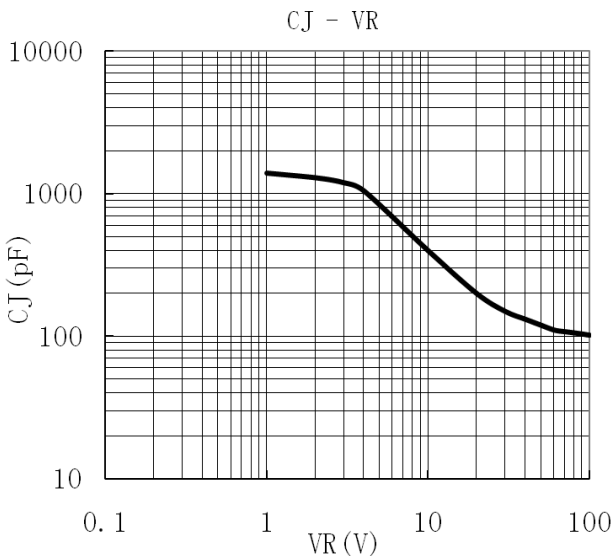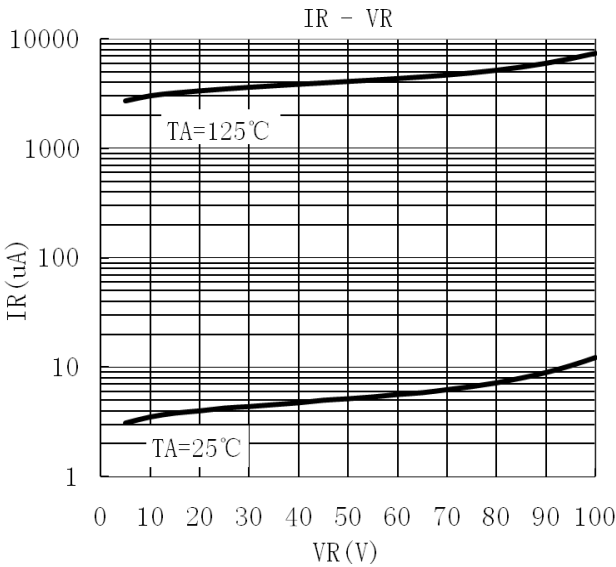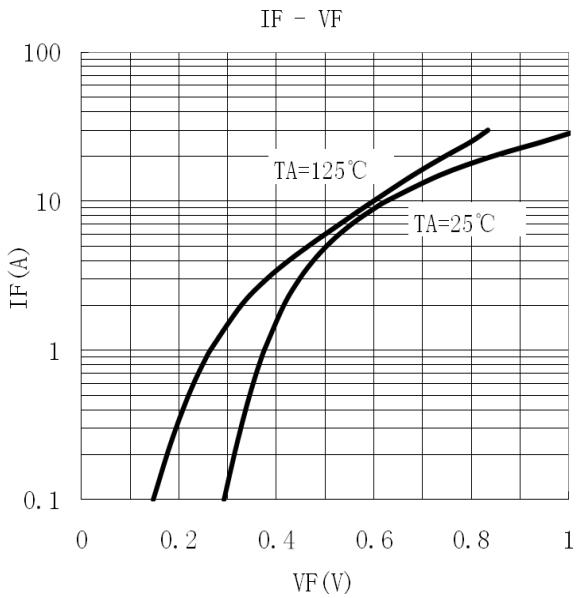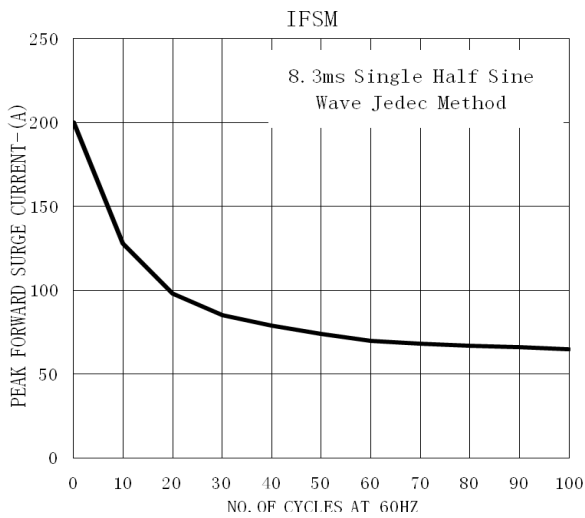

/ Package Dimensions


TQ-220

单位: mm

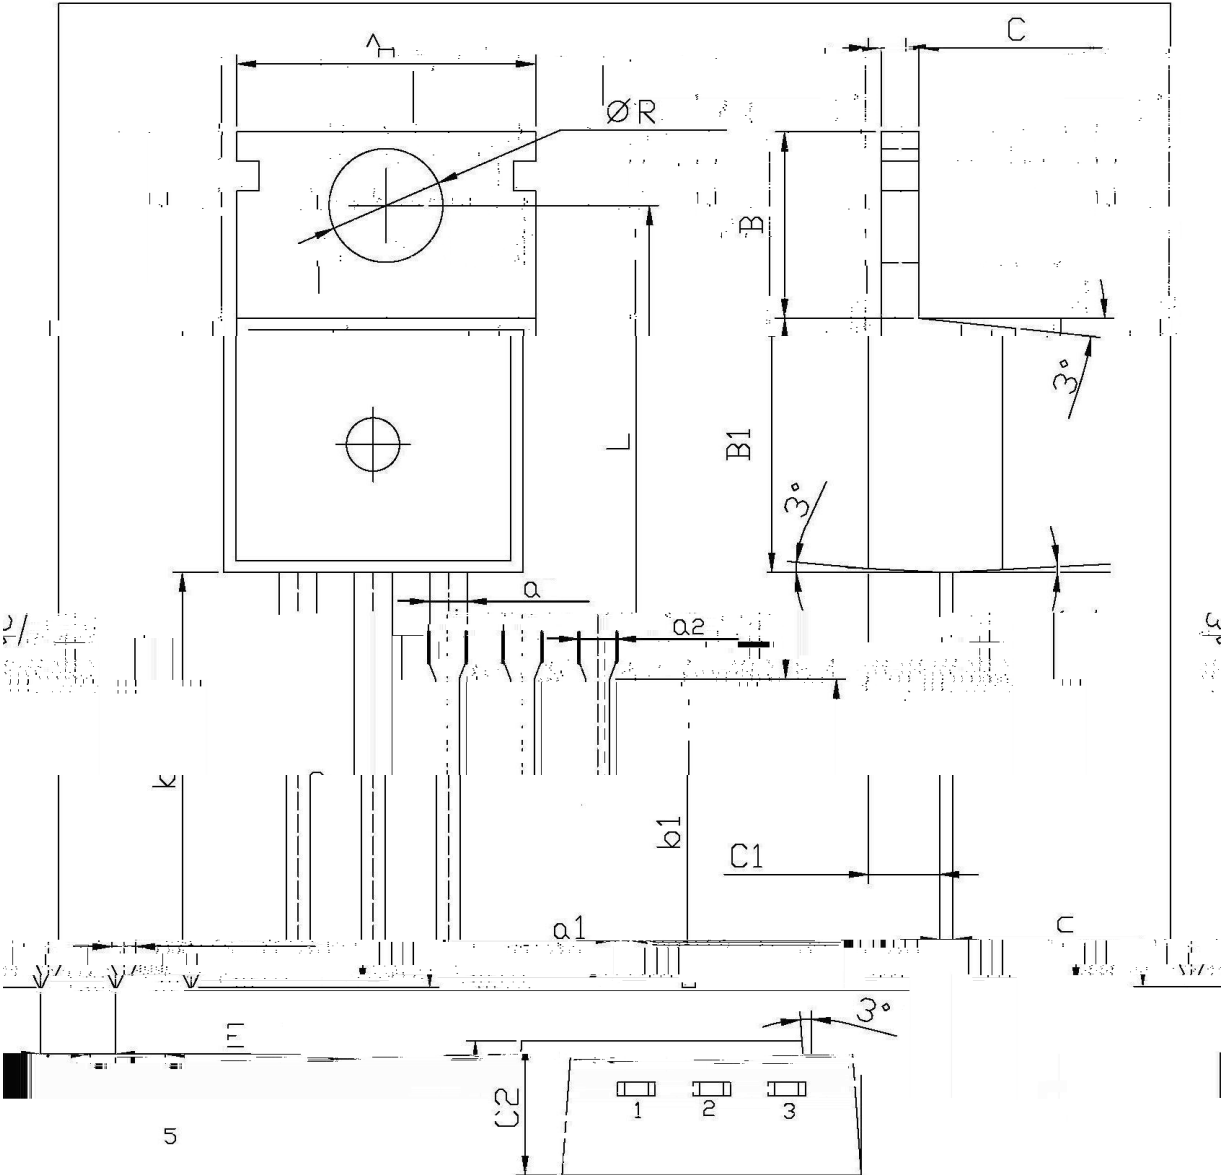

Dimension and tolerance			Dimension and tolerance		
Symbol	Min	Max	Symbol	Min	Max
a	9.8	13.2	C	16.0	17.4
R	3.56	3.64	B	6.3	6.7
B	15.7	16.1	$B1$	9.3	9.4
b	2.6	3.6	$C1$	2.2	2.6
$a1$	1.25	1.45	C	16.0	17.4
$b1$	2.2	2.6			
C	16.0	17.4			

/ Marking Instructions

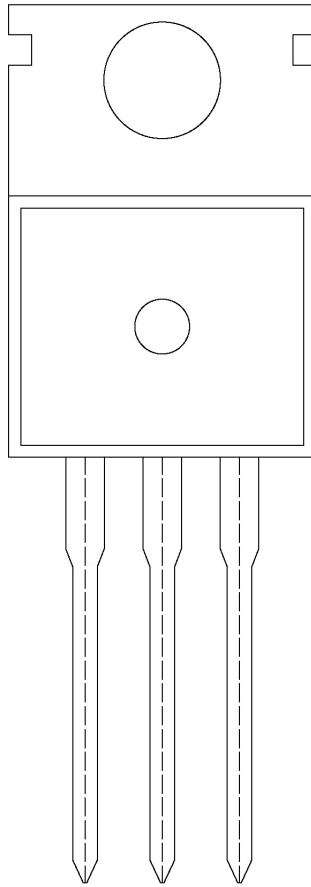

LV30100

CT:

LV30100

CT

