


Rev.F May.-2016

TO-263

Schottky Diode in a TO-263 Plastic Package.

Low power loss, high efficiency.

For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.



PIN1 Anode

PIN 2 4 Cathode

PIN 3 Anode



See Marking Instructions.


Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Reverse Voltage	V_{RRM} V_{RWM} V_{RM}	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	V
Average forward rectified Current	I_F	2X5	A
Non Repetitive Peak Surge Current	I_{FSM}	125	A
Thermal Resistance Junction to Case	R_{JC}	2.5	°C/W
Junction Temperature Range	T_j	150	°C
Storage Temperature Range	T_{stg}	-55 150	°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse Voltage	V_R	$I_R=0.3mA$	100			V
Forward Voltage	V_{FM}	$I_F=5.0A$ $T_j=25^{\circ}C$			0.85	V
		$I_F=5.0A$ $T_j=125^{\circ}C$			0.75	V
		$I_F=10A$ $T_j=25^{\circ}C$			0.95	V
		$I_F=10A$ $T_j=125^{\circ}C$			0.85	V
Instantaneous Reverse Current	I_R Note 1	$V_R=100V$ $T_j=25^{\circ}C$			10	uA
		$V_R=70V$ $T_j=125^{\circ}C$			1	mA
		$V_R=100V$ $T_j=125^{\circ}C$			5	mA

/Notes


1. /Short duration pulse test used to minimize self-heating effect.
2. / Unless otherwise noted, values for the parameters of a single chip

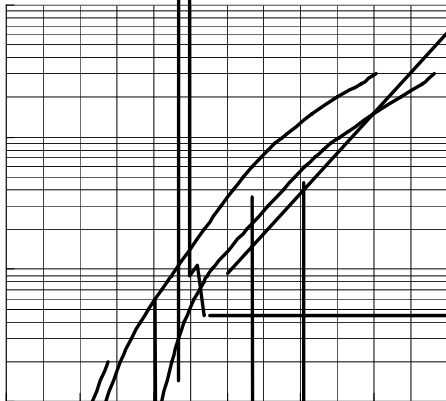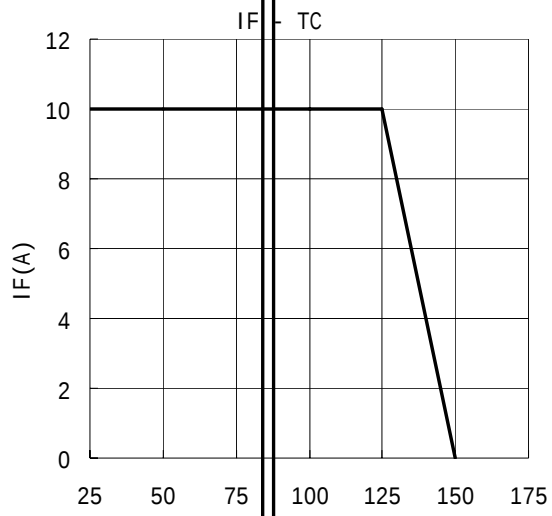

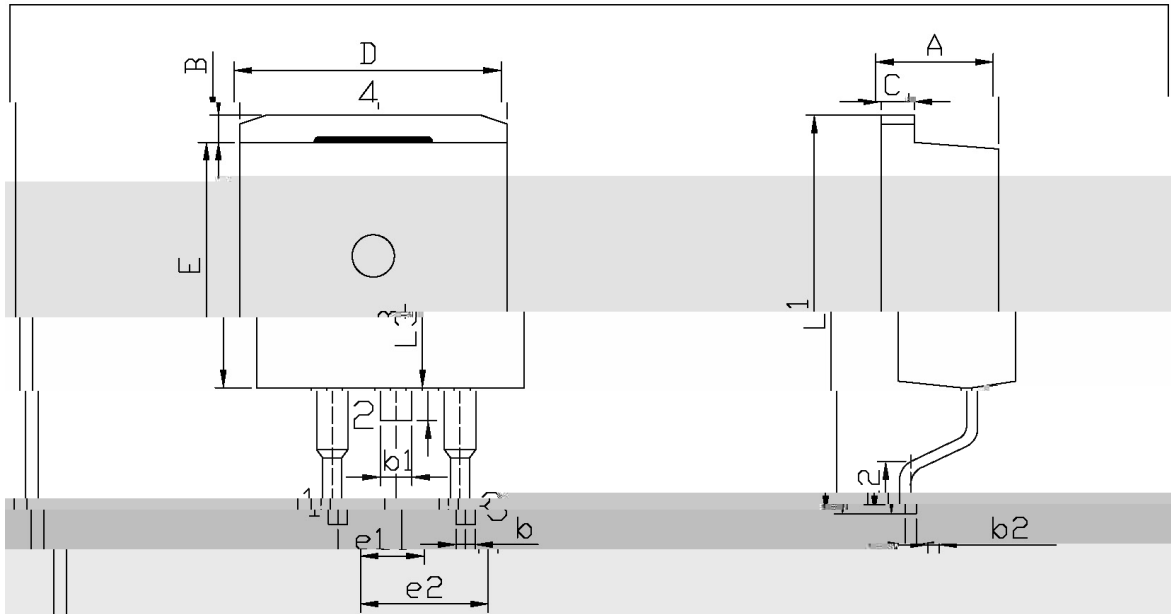

单位: mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A _L	4.30	4.70	E _L	0.00	0.40
B	1.00	1.40	F	0.00	0.40

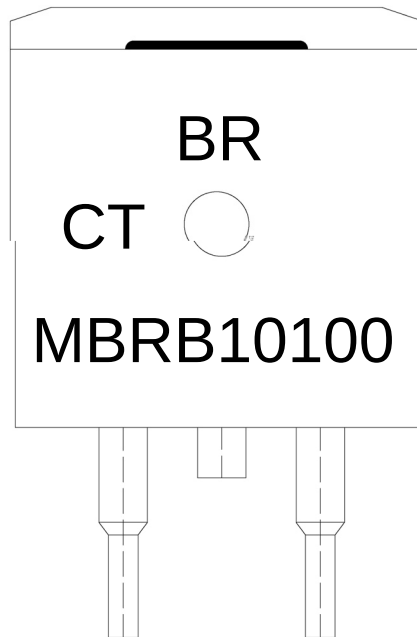

BR

MBRB10100

CT:

Note:

BR:

Company Code

MBRB10100

Product Type.

CT:

Internal Structure

****:

Lot No. Code, code change with Lot No.

Rev.F May.-2016